


Electrical Specifications

Parameters	Specification	Unit
Frequency Range	2400 ~ 2500	MHz
VSWR, max	3.0	-
Impedance	50	Ω
Gain, typ	1.5	dB
Polarization	Linear	-
Azimuth	Omni-direction	-
Operating Temperature Range	-10 ~ +50	$^{\circ}\text{C}$
Storage Temperature Range	-40 ~ +85	$^{\circ}\text{C}$

Mechanical Specifications


Parameters	Specification	Unit
Antenna Dimensions	35.7 x 6.8 x 0.4	mm
Material	FR-4	
RF Cable	Length	70 \pm 5
	Diameter	1.13 \pm 0.1
Installation Mode	Surface pasting	-

Dimensions

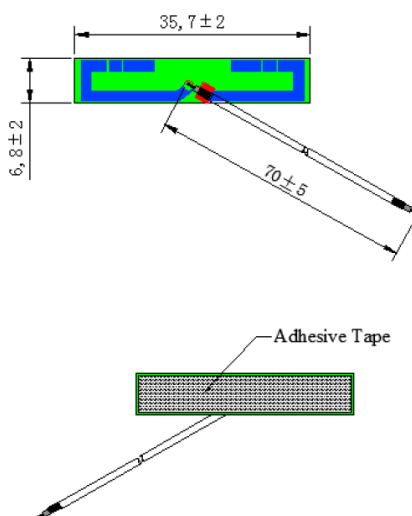


Frequency Characteristics

S11 CHARACTERISTIC CURVE IN THE AIR

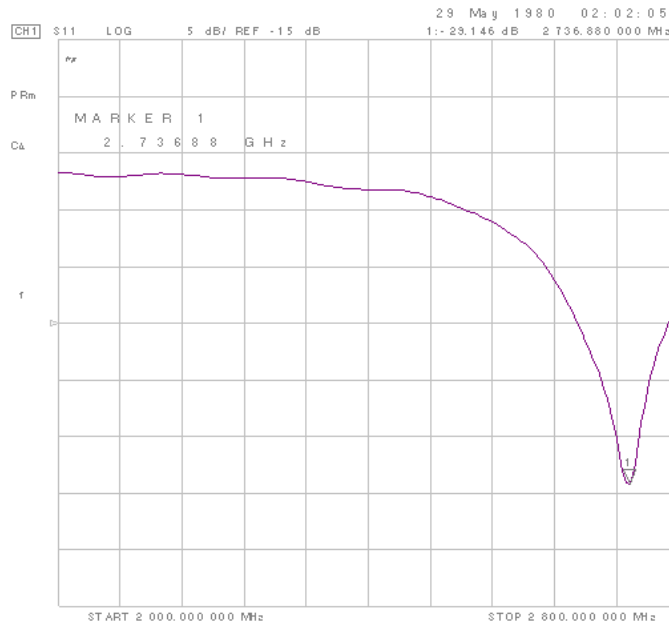

S11 CHARACTERISING CURVE PASTING ON THE SHELL

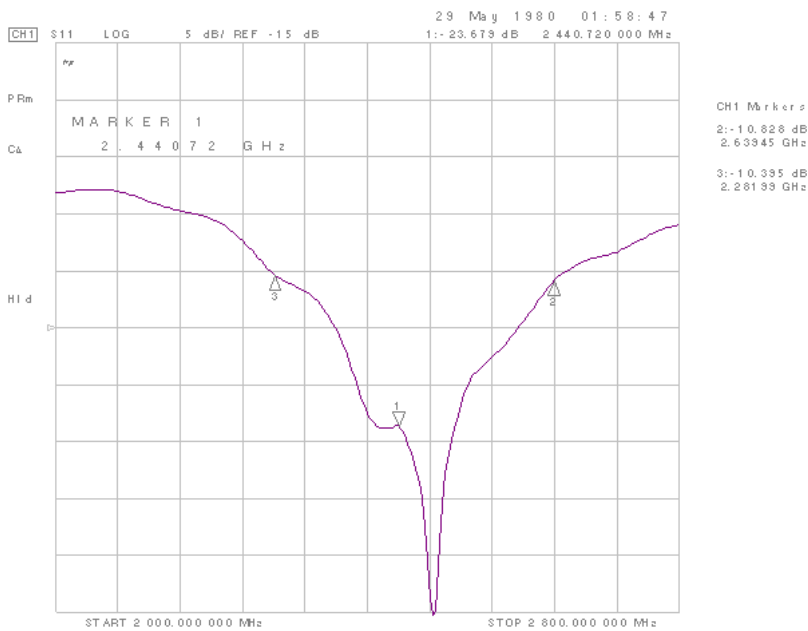

APPROVAL

DRAWN BY	CP, January 27, 2016
APPROVED BY	CP, January 27, 2016

REVISION	A, Initial Release
----------	--------------------

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.