

RUBBER ANTENNA Page 1 of 4


RST-MA16-5008-23M-FY-001

SPECIFICATION

PARAMETERS	VALUE	UNIT
Center Frequency	868.000	MHz
Gain	2	dBi
Impedance	50	Ω
VSWR, max	2	-
Return Loss, max	-10	dB
Polarization	Linear Vertical	-
Radiation	Omni-directional	-
Connector	R/A SMA Male	-
Length	47.5 ± 2	mm
Operating Temperature Range	-40 ~ +85	°C
Power, max	1	W



DIMENSIONS

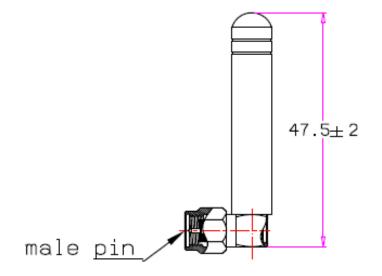




RUBBER ANTENNA


Page 2 of 4

RST-MA16-5008-23M-FY-001

FREQUENCY CHARACTERISTICS

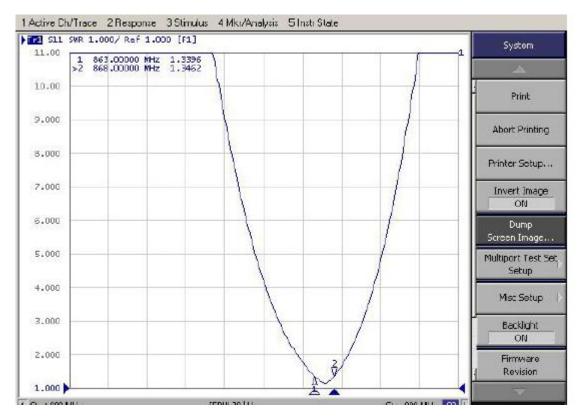

ANECHOIC CHAMBER TEST

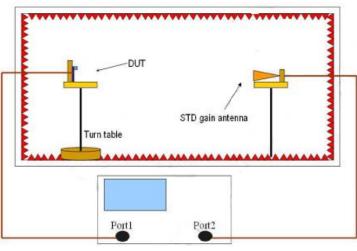

Antenna measured in Network Analyzer




RUBBER ANTENNA Page 3 of 4


RST-MA16-5008-23M-FY-001

GAIN AND EFFICIENCY

Passive Test For 863-868MHz								
Freq	Effi	Effi	Gain	Gain	Max	Min	Attenut	Attenut
(MHz)	(%)	(dB)	(dBi)	(dBd)	(dB)	(dB)	Hor	Ver
863	48.31	1.71	3.26	1.11	3.26	1.17	37.24	36.89
864	46.62	1.66	3.27	1.12	3.27	1.1	37.25	36.89
865	45.09	1.62	3.28	1.13	3.28	1	37.26	36.89
866	43.68	1.57	3.26	1.11	3.26	0.96	37.28	36.89
867	42.25	1.53	3.27	1.12	3.27	0.93	37.29	36.89
868	40.83	1.49	3.28	1.13	3.28	0.86	37.3	36.89

RADIATION PATTERN

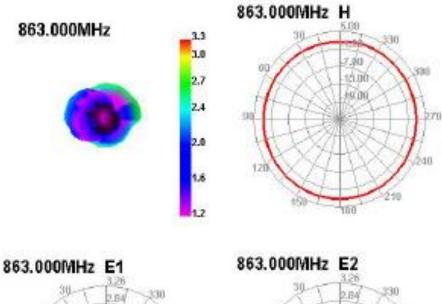


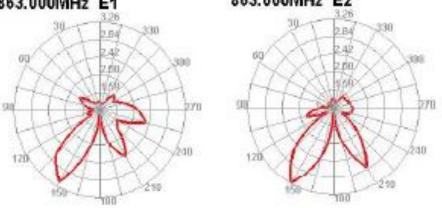



RUBBER ANTENNA Page 4 of 4

RST-MA16-5008-23M-FY-001

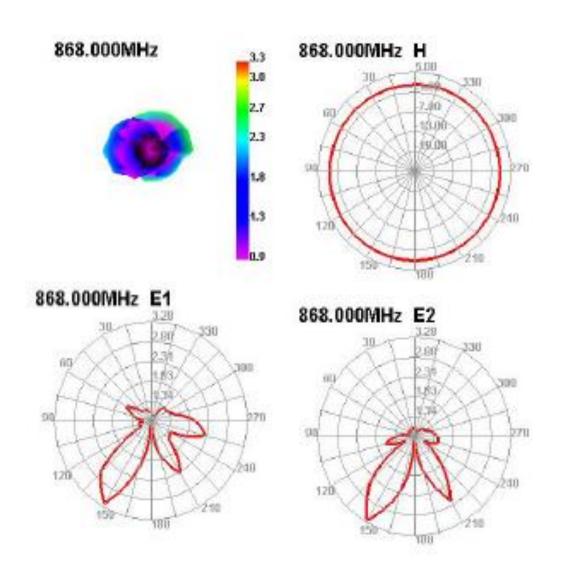

APPROVAL

RALTRON				
DRAWN BY:	AR, May 30, 2018			
APPROVED BY:	CP, May 30, 2018			
REVISION:	A, Initial Release			

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harrnless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.