


■ SPECIFICATION


SPECIFICATIONS		SPECIFICATIONS	UNIT
Frequency Range		2400 ~ 2500 5150 ~5725	MHz
Nominal Impedance		50	Ω
VSWR, max		2.5	-
Polarization		Vertical	-
Azimuth		Omni-direction	-
Gain, typ		1.5	dBi
Power, max		50	W
Lighting Protection		Direct-current earth	-
RF Cable	Type	RG178	-
	Impedance	50	Ω
Radome Color		Black	-
Length		108±1	mm
Weight		9.5	g
Connector		Reversed SMA Plug	-



■ TEST DATA

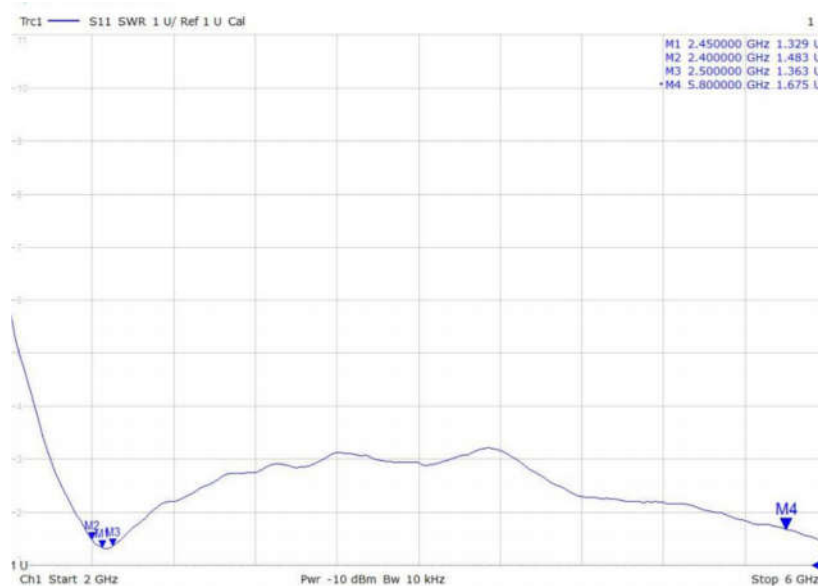

■ DIMENSIONS

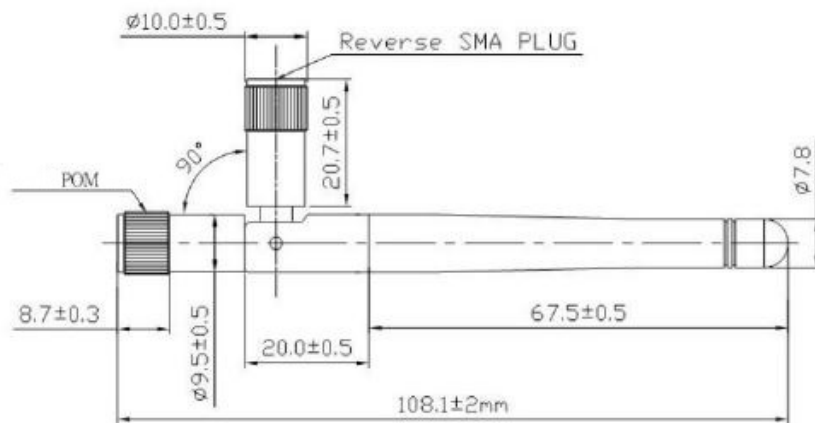

May, 2016