



## ❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Working Frequency	DC ~ 6	GHz
Impedance	50	$\Omega$
VSWR, max	1.5	-
Working Voltage, max	500	V
Insulation Resistance, min	5000	$\Omega$
Outer Contact, max	2	$\Omega$
Working Temperature Range	-65 ~ +165	$^{\circ}\text{C}$
TNC Jack Need To Be Waterproof Over IP67		

## ❖ DIMENSIONS

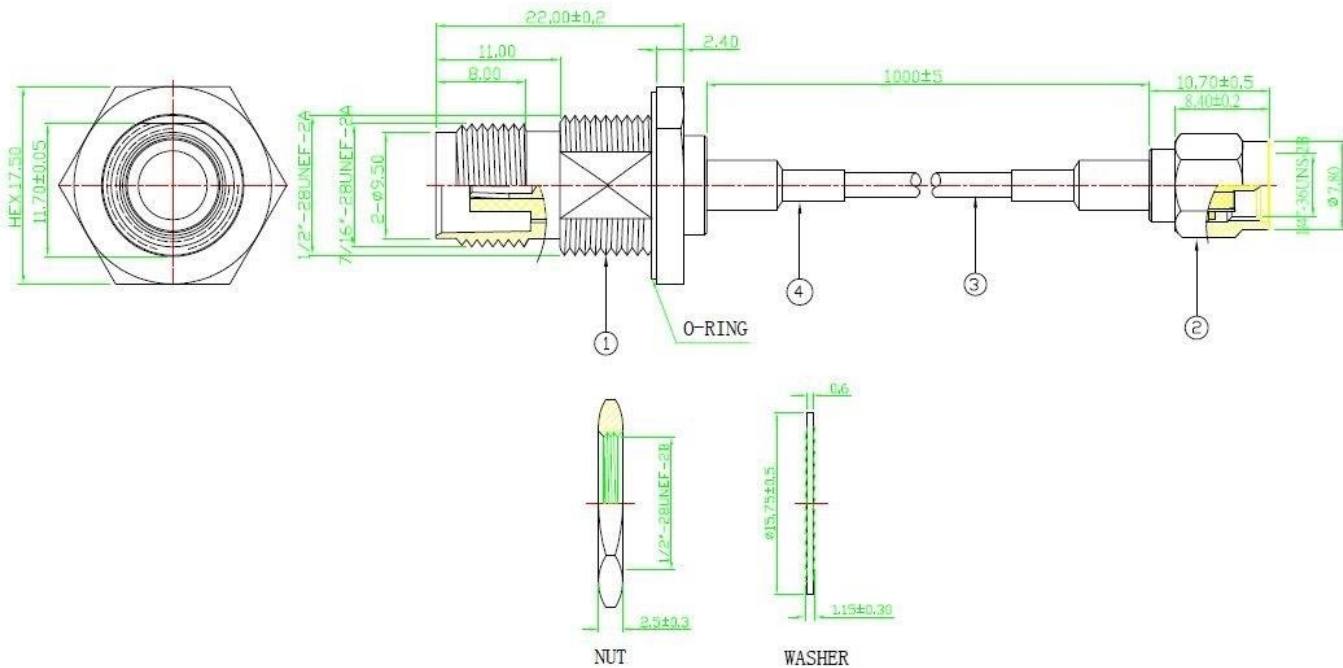

No.	Description	Material/ Finished
1	IP67 TNC FEMALE	BRASS NICKEL
2	SMA MALE	BRASS GOLD
3	RG316 CABLE	BROWN
4	HEAT SHRINK TUBE	BLACK

				 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description <b>TNC JACK S/T FOR RG316 CABLE</b>	
Projection		Date	Name		
Scale		Drawn	10.20.2021	AR	Part Number <b>RCB-13-J-1000-12-SD</b>
--		Checked	10.20.2021	CP	
Dimensions in mm		Approved	10.20.2021	CP	