




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Working Frequency	DC ~ 6	GHz
Impedance	50	Ω
VSWR, max	2.0	-
Working Voltage, max	335	V
Insulation Resistance	1000	M Ω
Contact Resistance, max	5	m Ω
Outer Contact, max	2.5	m Ω
Working Temperature Range	-55 ~ +125	$^{\circ}$ C

❖ DIMENSIONS

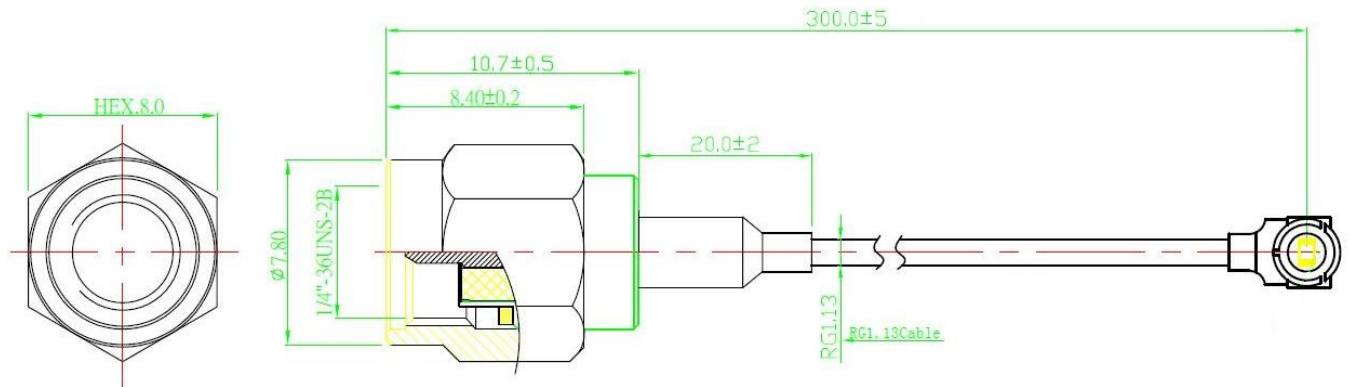

Description	Material	Finished
Heat Shrinkable Tube	-	Black
RG 1.13 Cable	-	Black
SMA Plug	Cu	Gold Plating

				 A RAMI TECHNOLOGY Company		
Rev	Change	Date	Name			Description SMA PLUG S/T FOR RG1.13 CABLE
Projection		Date	Name			
		Scale		Drawn 05.04.2021 AR Checked 05.04.2021 CP Approved 05.04.2021 CP	Part Number RCB-16-F-300-12-SD	
Dimensions in mm		--				A