



ELECTRICAL SPECIFICATION

PARAMETER	SYMBOL	CONDITIONS	VALUE	UNIT
Frequency, nom	f_o		66.000	MHz
Supply voltage, nom	V_{CC}	$V_{CC} \pm 10\%$	3.3	V
Supply Current, max	I_S	$T_a = +25^\circ\text{C}$ Load = 15 pF CMOS or 5 TTL max	15	mA
Output Voltage Levels	V_{OH} V_{OL}	Logic 1 Logic 0	$0.9 * V_{CC} \text{ min}$ $0.1 * V_{CC} \text{ max}$	VDC VDC
Duty Cycle	DC	@ 50% of signal	45 ~ 55	%
Standby current, max			10	μA
Rise Time / Fall Time, max	t_r / t_f	10%~90% V_{out} , 90%~10% V_{out} ,	3	ns
Start-up Time, max			2	ms
Phase Jitter, RMS, max	J	1σ , $12\text{kHz} < F_j < 20\text{MHz}$	1	ps
Freq. Stability, max	$\Delta f/f_c$	Inclusive of 25° Tolerance, Operating Temperature Range, Voltage & Load Variations and First Year Aging	± 50	ppm
Output Enabled / Disabled	E/D	Pin 1: N.C. (Open) or High, Pin 3 – Oscillation (Enabled), min Pin 1: Low, Pin 3 – High Impedance (Disabled), max	$0.7 * V_{CC}$ $0.3 * V_{CC}$	VDC VDC
Operating Temperature Range	T_a		-40 ~ +85	$^\circ\text{C}$
Storage Temperature Range	$T(\text{stg})$		-55 ~ +125	$^\circ\text{C}$

MECHANICAL SPECIFICATION

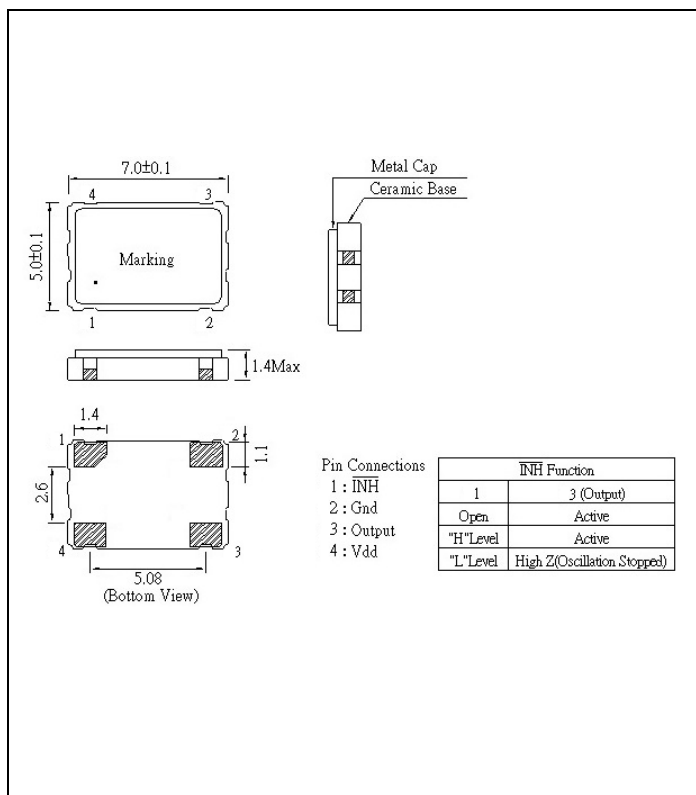

OUTLINE TOLERANCE: $\pm 0.015''$ / 0.4mm (Unless otherwise specified)

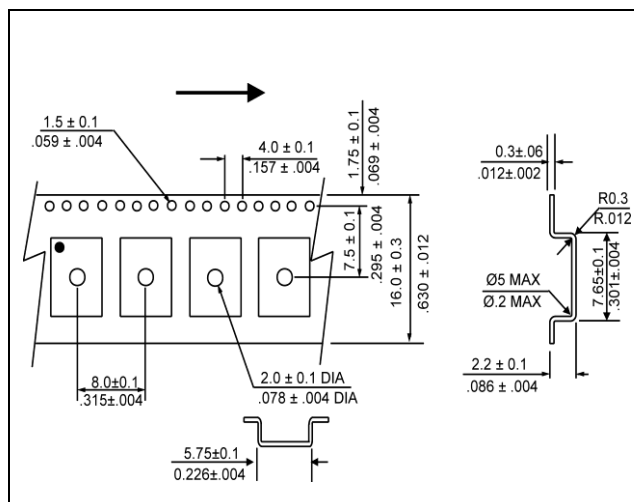


PACKAGING

254 mm REEL DIAMETER
16 mm TAPE WIDTH, 8 mm PITCH
QUANTITY: 1000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

REFLOW PROFILE

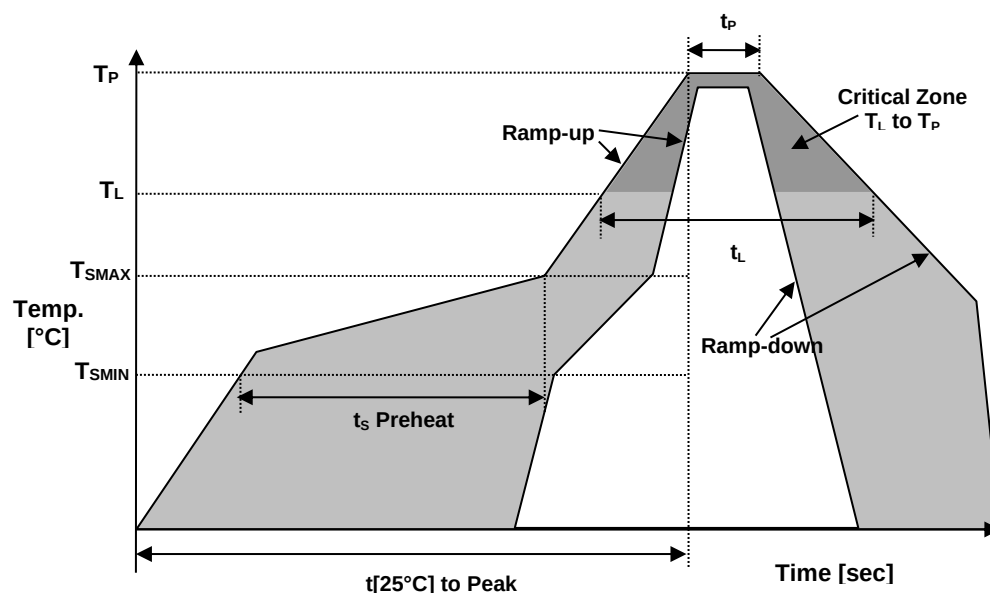

Reflow profile		
Temperature Min Preheat	T _S MIN	150°C
Temperature Max Preheat	T _S MAX	200°C
Time (T _S MIN to T _S MAX)	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _P	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH-SVHC	Compliant
HALOGEN-FREE	Compliant
TERMINATION FINISH	Au
UNIT WEIGHT (grams)	0.155





A **RAMI TECHNOLOGY** Company

CLOCK OSCILLATOR

Page 3 of 3

CO4605-66.000-EXT-T-TR

MARKING

Rx66.00T

•6BEyww

x – 1 or 2 digits as Internal Production ID code

y – Year code

w – Week code

YEAR CODE	
Year	Code
2018	8
2019	9
2020	0
2021	1
2022	2
2023	3
2024	4
2025	5
2026	6
2027	7
2028	8
2029	9

ALPHA WEEK CODE TABLE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

APPROVAL

DRAWN BY:	KJackson, Feb. 19, 2015
APPROVED BY:	KJackson, Feb. 19, 2015
REVISION:	A, Initial Release B, Updated to current spec levels by XLiu, April 16, 2020 C, Updated to current spec levels by XLiu, September 10, 2021

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.