



- **FEATURES**
  - DESIGNED FOR TIME OF DAY CLOCKS APPLICATIONS
  - SMALL COMPACT SIZE WITH PERFORMANCE AND ECONOMY
  - EXCELLENT SHOCK AND ENVIRONMENTAL CHARACTERISTICS

● **SPECIFICATIONS**


PARAMETERS	VALUE
NOMINAL FREQUENCY	32.768 kHz
FREQUENCY TOLERANCE	±20 ppm Standard ±5 ppm and ±10 ppm Available
TURNOVER TEMPERATURE	25°C ±5°C
PARABOLIC CURVATURE CONSTANT (TYP)	-0.034±0.006 ppm/°C <sup>2</sup>
LOAD CAPACITANCE	6 to 12.5 pF
EQUIVALENT SERIES RESISTANCE (MAX)	30 kΩ
DRIVE LEVEL (MAX)	1.0 μW
MOTIONAL CAPACITANCE (TYP)	0.0035 pF
SHUNT CAPACITANCE (TYP)	1.6 pF
CAPACITANCE RATIO (TYP)	460
AGING (FIRST YEAR MAX)	±3 ppm
QUALITY FACTOR (TYP)	60000
INSULATION RESISTANCE (MIN)	500 MΩ
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-40°C to +85°C
SHOCK RESISTANCE	±5 ppm max 75 cm drop test in 3 axes onto a hard surface



SCALE NONE DIMENSION IN mm/INCH

Notes: FREQUENCY DEVIATION AT T IS GIVEN AS:  $\Delta f/f = K (T_o - T)^2$ , WHERE K IS PARABOLIC CURVATURE CONSTANT

● **MECHANICAL SPECIFICATION**

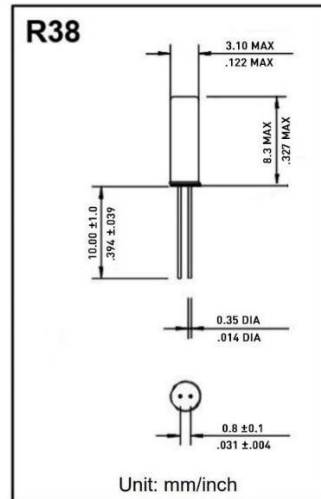

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

● **PART NUMBERING SYSTEM**

TYPE	-	FREQUENCY kHz	-	LOAD CAPACITANCE pF	-	TOLERANCE ppm
R38	-	32.768	-	6 to 12.5	-	Blank: ±20 ppm 5: ±5 ppm 10: ±10 ppm

EXAMPLE: R38-32.768-6-10

Tuning Fork Crystal 3x8 mm, 32.768 kHz, 6 pF, ±10 ppm