


- ❖ Support Band 12, Band 13 Band 14 and Band 67 (RX), receive path (RX)
- ❖ Impedance 50  $\Omega$  Input and Output
- ❖ Unbalanced to Unbalanced Operation
- ❖ Low Insertion Loss
- ❖ RoHS Compliant

**Electrical Specification**


Parameters		Value	Unit	
Insertion Loss, typ/max	Band 12 Rx	729 ~ 746 MHz	1.7 / 2.0	dB
	Band 67 Rx	738 ~ 758 MHz	1.5 / 1.8	dB
	Band 13 Rx	746 ~ 756 MHz	1.5 / 1.8	dB
	Band 14 Rx	758 ~ 768 MHz	1.6 / 2.0	dB
Pass Band Ripple, typ/max	Band 12 Rx	729 ~ 746 MHz	0.5 / 1.0	dB
	Band 67 Rx	738 ~ 758 MHz	0.5 / 1.0	dB
	Band 13 Rx	746 ~ 756 MHz	0.5 / 1.0	dB
	Band 14 Rx	758 ~ 768 MHz	0.5 / 1.0	dB
VSWR, typ/max	Band 12 Rx	729 ~ 746 MHz	1.7 / 2.2	-
	Band 67 Rx	738 ~ 758 MHz	1.7 / 2.0	-
	Band 13 Rx	746 ~ 756 MHz	1.7 / 2.0	-
	Band 14 Rx	758 ~ 768 MHz	1.7 / 2.2	-
Absolute Attenuation, min/ typ	Band 12 Tx	699 ~ 716 MHz	-35 / -40	dB
	Band 14 Tx	788 ~ 798 MHz	-20 / -24	dB
	Band 11 / Band 21 Tx	1427.9 ~ 1462.9 MHz	-40 / -44	dB
	Band 3 Tx	1705 ~ 1785 MHz	-40 / -44	dB
	Band 2 Tx	1850 ~ 1910 MHz	-39 / -44	dB
	Band 1 Tx	1920 ~ 1980 MHz	-38 / -42	dB
	ISM 2.4 G	2400 ~ 2500 MHz	-32 / -38	dB
	Band 41	2496 ~ 2690 MHz	-33 / -40	dB
	Band 42	3400 ~ 3600 MHz	-28 / -36	dB
ISM 5G	4900 ~ 5850 MHz	-23 / -34	dB	
DC Voltage		5	V	
Input Power, max	@ 2000 h	15	dBm	
ESD Voltage ESD (MM)		50	VDC	
Sensitive Discharge Voltage ESD(HBM)		175	VDC	
Terminating Source Impedance		50	$\Omega$	
Terminating Load Impedance		50	$\Omega$	
Operating Temperature Range		-30 ~ +85	$^{\circ}$ C	
Storage Temperature Range		-40 ~ +85	$^{\circ}$ C	

**Dimensions**

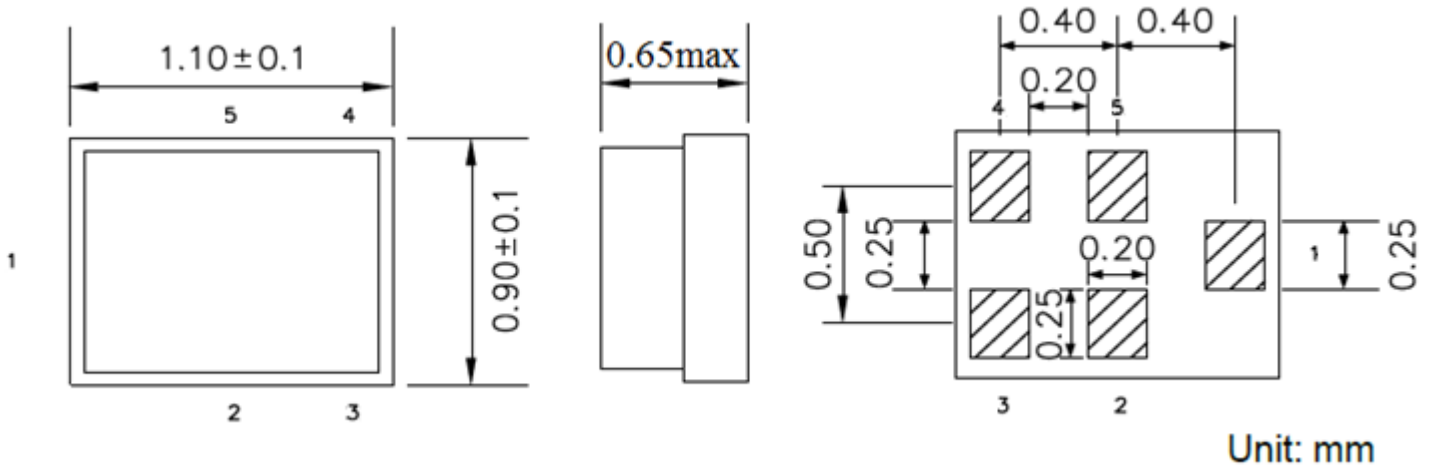

PIN #	PIN NAME	DESCRIPTION
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

**Test Circuit**

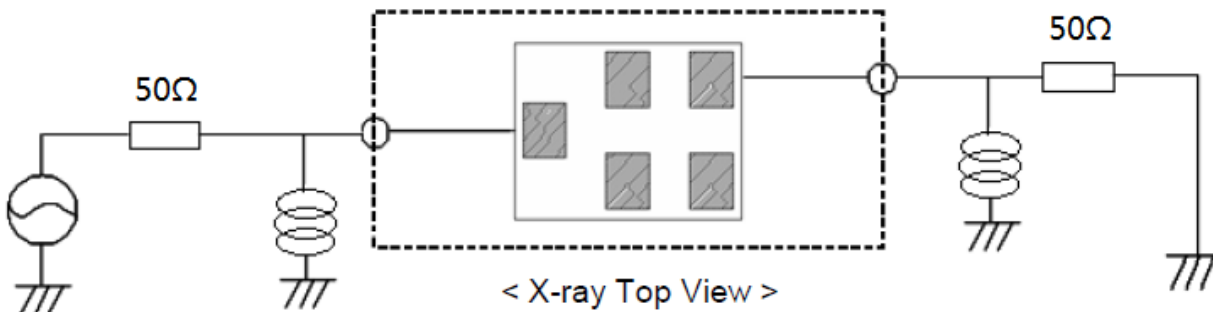

**Environmental**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	2
REACH – SVHC	Compliant
RoHS	Compliant

● **APPROVAL**

DRAWN BY	AR, August 19, 2021
APPROVED BY	CP, August 19, 2021
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.