

- **FEATURES**
- TEMPERATURE STABILITY  $\pm 0.5$  ppm ~  $\pm 2$ ppm
- OPERATING TEMPERATURE RANGE  $-40^{\circ}\text{C}$  ~  $+105^{\circ}\text{C}$
- RELIABILITY TESTING PER AEC-Q200



- **SPECIFICATIONS FOR OUTPUT CMOS**

PARAMETER		VALUE	
FREQUENCY RANGE		8 ~ 70 MHz	
SUPPLY VOLTAGE		1.8, 2.5, 3.3, 1.8 ~ 3.3 V	
INPUT CURRENT		10 mA max	
FREQUENCY STABILITY	vs. TEMPERATURE	@ $-40 \sim +85^{\circ}\text{C}$	$\pm 0.5$ ppm
		@ $-40 \sim +105^{\circ}\text{C}$	$\pm 1.25$ ppm
		@ $-40 \sim +125^{\circ}\text{C}$	$\pm 5$ ppm
	vs. LOAD ( $\pm 10\%$ )		$\pm 0.2$ ppm max
	vs. SUPPLY VOLTAGE ( $V_{CC} \pm 5\%$ )		$\pm 0.2$ ppm max
AGING 1 <sup>st</sup> YEAR		$\pm 1.0$ ppm max	
INITIAL FREQUENCY CALIBRATION	MEASURED AT $25^{\circ}\text{C}$ , BEFORE SHIPMENT	$\pm 1.0$ ppm max	
REFLOW SHIFT	2 CONSECUTIVE REFLAWS, AFTER 2 HOURS RELAXATION	$\pm 1.0$ ppm max	
OPERATING TEMPERATURE RANGE <sup>1</sup>		$-40 \sim +85^{\circ}\text{C}$	
		$-40 \sim +105^{\circ}\text{C}$	
		$-40 \sim +125^{\circ}\text{C}$	
STORAGE TEMPERATURE RANGE		$-55 \sim +125^{\circ}\text{C}$	
OUTPUT WAVEFORM		CMOS	
OUTPUT SYMMETRY ( $V_T = 1/2 V_{CC}$ )		45 ~ 55%	
LOAD		15 pF	
START-UP TIME		2 ms max	
ENABLE / DISABLE FUNCTION	PIN 1: HIGH, PIN 3 – OSCILLATION (ENABLED), min	$0.7 \times V_{CC}$	
	PIN 1: LOW, PIN 3 – HIGH IMPEDANCE (DISABLED), max	$0.3 \times V_{CC}$	
RISE / FALL TIME		5ns, max	
PHASE NOISE at 10 kHz OFFSET		-150 dBc/Hz max	



NOTE: 1. NOT ALL STABILITIES ARE AVAILABLE FOR ALL OPERATING TEMPERATURE RANGES. CONTACT FACTORY FOR AVAILABILITY.

- **PART NUMBERING SYSTEM**

TYPE	-	SERIES	STABILITY (ppm)	TEMP RANGE ( $^{\circ}\text{C}$ )	VOLTAGE (V)	-	OUTPUT	-	FREQ (MHz)	-	TAPE & REEL
RTXEA (TCXO with E/D)	-	2520	A: $\pm 0.5$ B: $\pm 1.0$ C: $\pm 1.5$ D: $\pm 2.0$ E: $\pm 2.5$	LZ: $0 \sim +70$ HZ: $-20 \sim +70$ F3: $-30 \sim +85$ D3: $-40 \sim +85$	1: 1.8 2: 2.8 33: 3.3 F*: 1.8 ~ 3.3	-	C: CMOS	-	8 ~ 70	-	TR

\*Other ranges available. Please contact factory.

- **FEATURES**
- TEMPERATURE STABILITY  $\pm 0.5\text{ppm} \sim \pm 2.0\text{ppm}$
- OPERATING TEMPERATURE RANGE  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- VOLTAGE CONTROL AVAILABLE (RTVA-2520 SERIES)
- RELIABILITY TESTING PER AEC-Q200



#### ● SPECIFICATIONS FOR CLIPPED SINEWAVE OUTPUT VOLTAGE

PARAMETER		VALUE	
FREQUENCY RANGE		9.500 ~ 52.000 MHz	
SUPPLY VOLTAGE		1.8, 2.5, 3.3, 1.8 ~ 3.3 V	
CURRENT	@ Freq. $\leq 26\text{MHz}$	2.0 mA max	
	@ Freq. $\geq 26\text{MHz}$	2.5 mA max	
FREQUENCY STABILITY	vs. TEMPERATURE	@ $-40 \sim +85^{\circ}\text{C}$	$\pm 0.5$ ppm
		@ $-40 \sim +105^{\circ}\text{C}$	$\pm 1.25$ ppm
		@ $-40 \sim +125^{\circ}\text{C}$	$\pm 5$ ppm
	vs. LOAD ( $\pm 10\%$ )		$\pm 0.2$ ppm max
	vs. SUPPLY VOLTAGE ( $V_{DC} \pm 5\%$ )		$\pm 0.2$ ppm max
AGING 1 <sup>ST</sup> YEAR		$\pm 1.0$ ppm max	
INITIAL FREQUENCY CALIBRATION	MEASURED AT $25^{\circ}\text{C}$ , BEFORE SHIPMENT	$\pm 1.0$ ppm max	
REFLOW SHIFT	2 CONSECUTIVE REFLAWS, AFTER 2 HOURS RELAXATION	$\pm 1.0$ ppm max	
OPERATING TEMPERATURE RANGE <sup>1</sup>		$-30 \sim +85^{\circ}\text{C}$	
		$-40 \sim +85^{\circ}\text{C}$	
		$-40 \sim +105^{\circ}\text{C}$	
		$-40 \sim +125^{\circ}\text{C}$	
STORAGE TEMPERATURE RANGE		$-55 \sim +125^{\circ}\text{C}$	
CLIPPED SINEWAVE OUTPUT VOLTAGE		0.8 V <sub>p-p</sub> typ	
LOAD		10 k $\Omega$ // 10pF	
START-UP TIME		2 ms max	
FREQUENCY TUNING RANGE <sup>2</sup>		$\pm 5 \sim \pm 15$ ppm	
CONTROL VOLTAGE RANGE <sup>2</sup>	@ 1.8 V	0.9V $\pm$ 0.9V	
	@ 2.5 V	1.25V $\pm$ 1.25V	
	@ 3.3 V	1.65 $\pm$ 1.65V	
PHASE NOISE at 10 kHz OFFSET		-148 dBc/Hz max	



NOTE: 1. NOT ALL STABILITIES ARE AVAILABLE FOR ALL OPERATING TEMPERATURE RANGES.  
CONTACT FACTORY FOR AVAILABILITY.

#### ■ PART NUMBERING SYSTEM


TYPE	-	SERIES	STABILITY (ppm)	TEMP RANGE (°C)	VOLTAGE (V)	FREQ TUNING RANGE (ppm)	-	OUTPUT	-	FREQ (MHz)	-	TAPE & REEL
RTXA (TCXO) RTVA (VCTCXO)	-	104	A: $\pm 0.5$ B: $\pm 1.0$ C: $\pm 1.5$ D: $\pm 2.0$ E: $\pm 2.5$	LZ: $0 \sim +70$ HZ: $-20 \sim +70$ F3: $-30 \sim +85$ D3: $-40 \sim +85$	1: 1.8 2: 2.8 33: 3.3 F*: 1.8 ~ 3.3	RTXA: Blank RTVA: 26: $\pm 7 \sim \pm 16$	-	S: Clipped Sine wave	-	9.50 ~ 52.00	-	TR

\*Other ranges available. Please contact factory.


**EXAMPLE: RTXA-2520AF31-S-26.000-TR**

Surface Mount TCXO, 2.5 mm x 2.0 mm package,  $\pm 0.5$  ppm Stability over  $-30^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , 1.8V, Clipped Sinewave, 26.000 MHz, Tape and Reel Packaging

● **MECHANICAL SPECIFICATION**

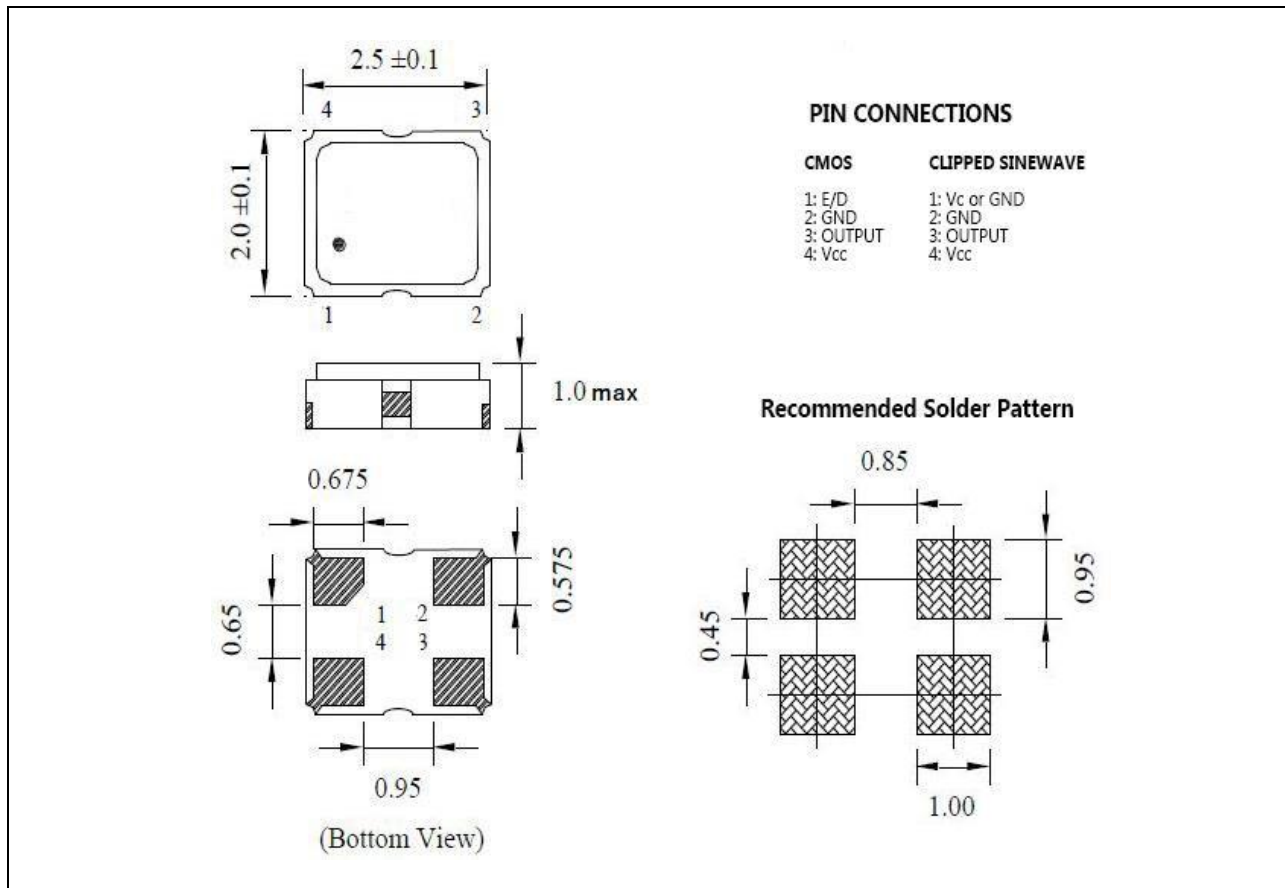

#### REFLOW PROFILE

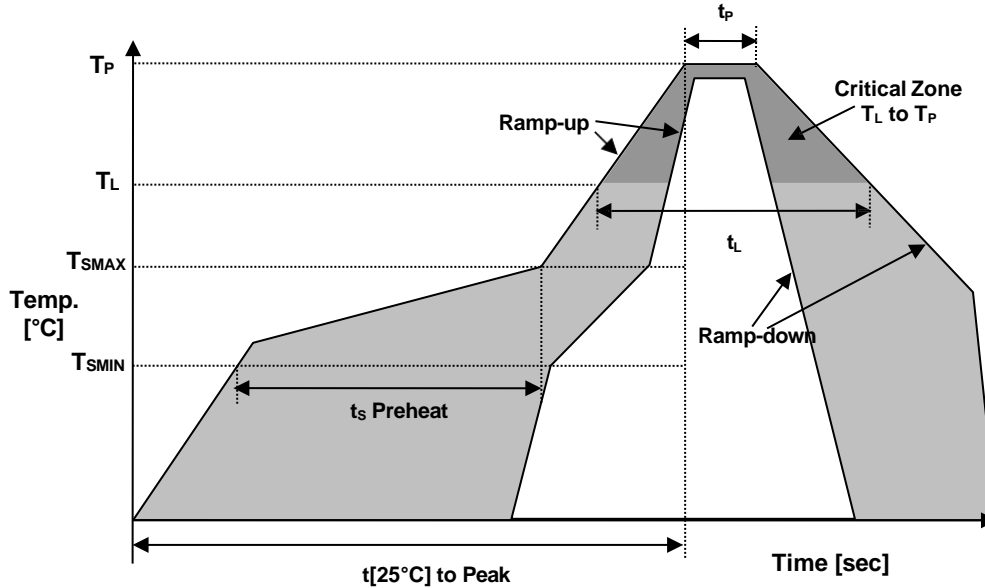

Reflow profile		
Temperature Min Preheat	$T_{SMIN}$	150°C
Temperature Max Preheat	$T_{SMAX}$	200°C
Time ( $T_{SMIN}$ to $T_{SMAX}$ )	$t_s$	60-180 sec.
Temperature	$T_L$	217°C
Peak Temperature	$T_P$	260°C
Ramp-up rate	$R_{UP}$	3°C/sec max.
Ramp-down rate	$R_{DOWN}$	6°C/sec max.
Time within 5°C of Peak Temperature	$t_p$	10 sec.
Time $t_{[25^\circ\text{C}] \text{ to Peak Temperature}}$	$t_{[25^\circ\text{C}] \text{ to Peak}}$	480 sec.
Time	$t_L$	60-150 sec.

#### ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	COMPLIANT
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
TERMINATION FINISH	Au



Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.