




■ ELECTRICAL SPECIFICATION

PARAMETER		VALUE
Frequency Range (F ₀)		60.000 ~ 200.000 MHz
Supply Voltage (V _S)		3.3 ± 10% VDC
Oscillation Mode		Fundamental
Control Voltage Range (V _{CC})		1.65 ± 1.65 VDC
Input Current		80 mA max
Frequency Stability		±20 ppm, ±25 ppm, ±50 ppm, ±100 ppm
Frequency Adjustment Range		±50 ppm, ±100 ppm min
Operating Temperature Range		-10 ~ +70°C -40 ~ +85°C
Storage Temperature Range		-55 ~ +125°C
Output LVPECL	Symmetry at 50% V _S	40% ~ 60% Standard 45% ~ 55% Tight
	Rise / Fall Time	1.0 ns max
	Logic "0" Level	1.68 V max
	Logic "1" Level	2.475V min
	Load (Terminus to V _S -2V)	50 Ω
Enable / Disable Function		Pin 1: High or Open / Output enabled (Pins 4 & 5) Pin 1: Low / Output disabled (High impedance)
RMS Phase Jitter (12kHz ~ 20 MHz)		1 ps max

MECHANICAL SPECIFICATION

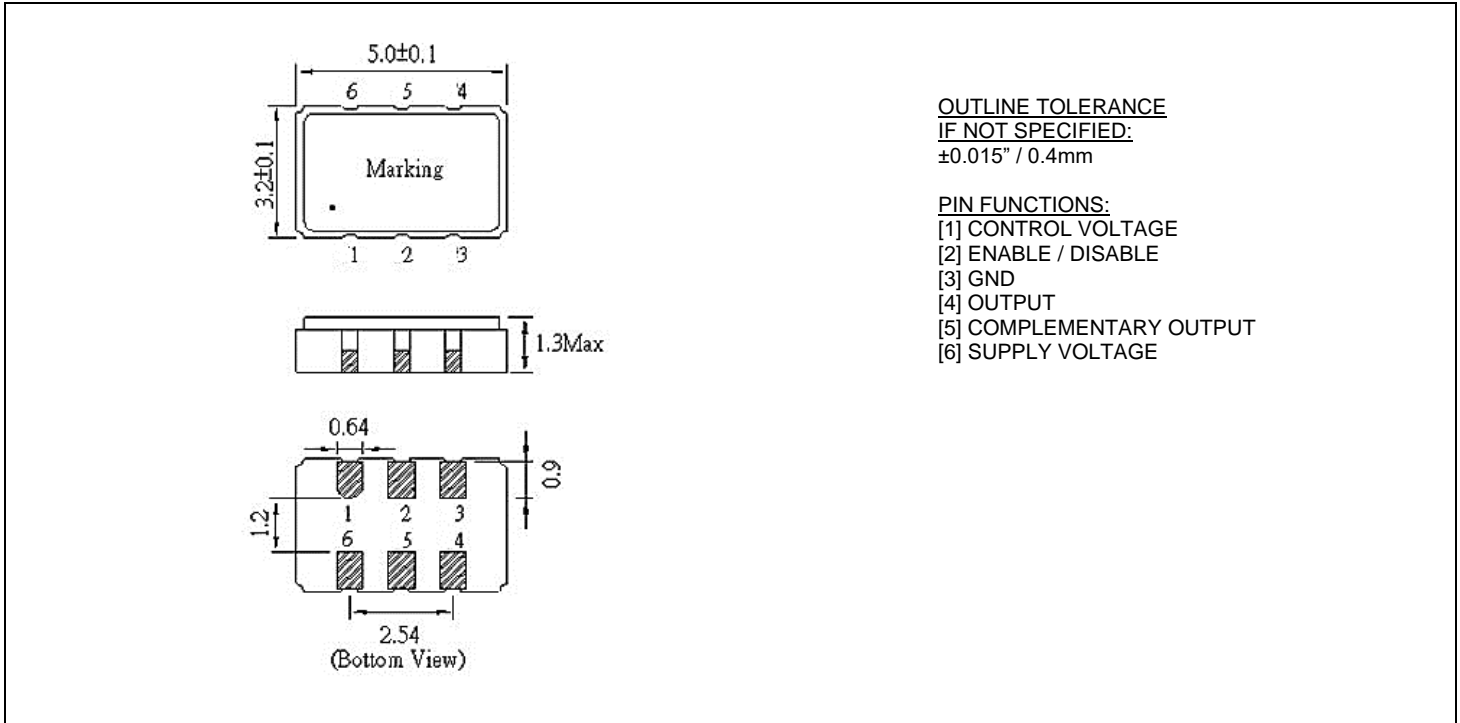


PART NUMBERING SYSTEM

TYPE	SERIES	VOLTAGE (V)	STABILITY (ppm)	-	TEMPERATURE RANGE (°C)	-	PULLABILITY (ppm)	-	SYMMETRY (%)	-	FREQUENCY (MHz)
VPF	5	3: 3.3	20: ± 20 25: ± 25 50: ± 50 10: ± 100	-	JZ: -10 ~+70 HZ: -20 ~+70 D3: -40 ~+85	-	50: ± 50 100: ± 100	-	blank: 40~ 60 T: 45~55	-	60.000 ~ 200.000

EXAMPLE: VPF5325-D3-100-T-155.520

Surface Mount VPF5 Series, LVPECL Fundamental VCXO, 5.0 x 3.2 mm, 3.3 VDC Supply Voltage, ± 25 ppm Stability from -40°C to $+85^\circ\text{C}$, ± 100 ppm Frequency Adjustment Range, Symmetry 45% to 55%, 155.520 MHz

REFLOW PROFILE

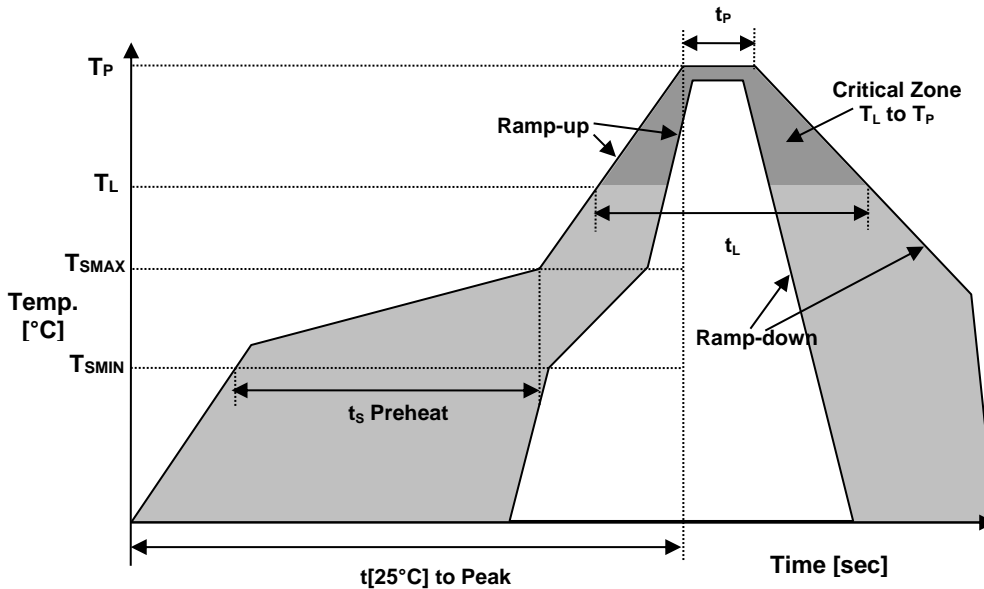

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	t_L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH SVHC	COMPLIANT
RoHS	COMPLIANT
TERMINATION FINISH	Au



May 2017