



Items	Specification	Unit
Center frequency (F _o)	450.000	MHz
Insertion Loss (448.000 ~ 452.000), typ/max	2.0 / 3.0	dB
Amplitude Ripple (448.000 ~ 452.000), typ/max	0.5 / 1.5	dB
-3dB Bandwidth, typ	9.2	MHz
Attenuation F _o -42.8MHz, min/typ	-55 / -70	dB
In/Out Impedance	50	Ω
Input Power, max	15	dBm
Operation Temperature	-40 to +85	°C
Storage Temperature	-40 to +85	°C


Dimension

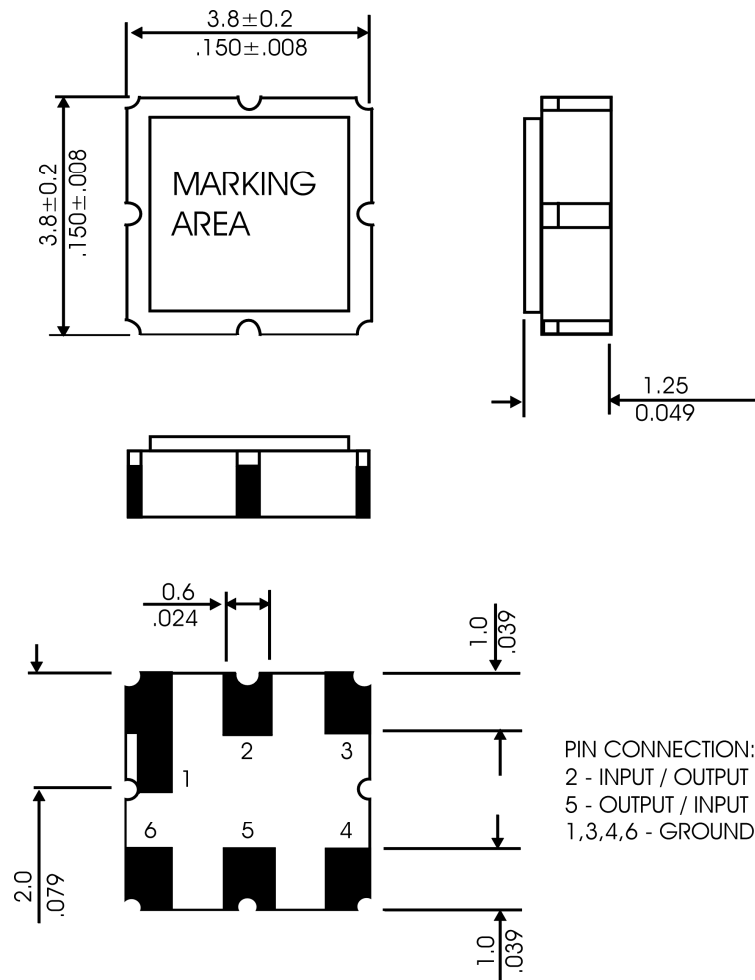

Frequency Characteristics

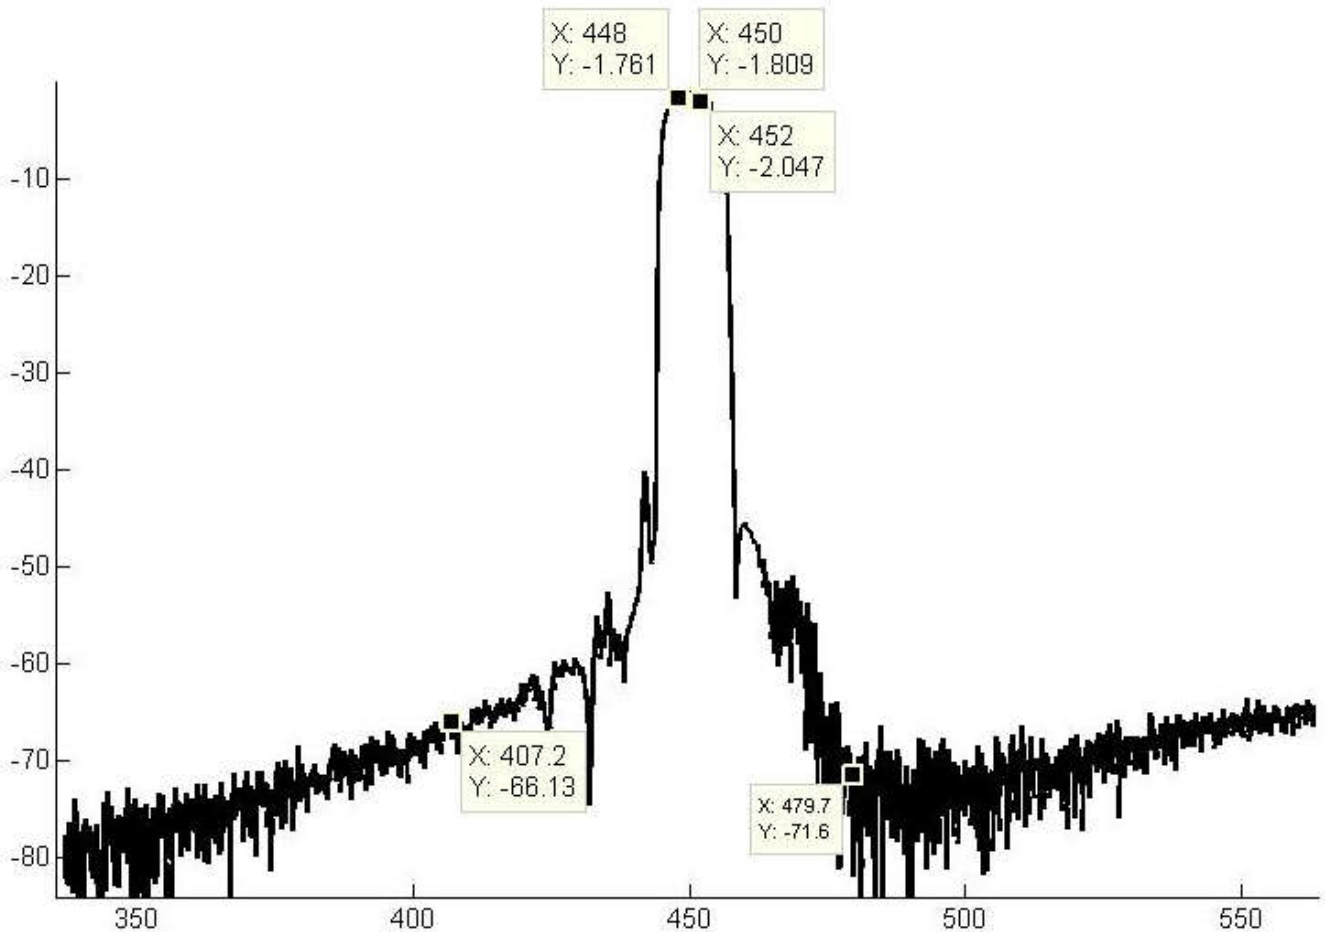

● **REFLOW PROFILE**

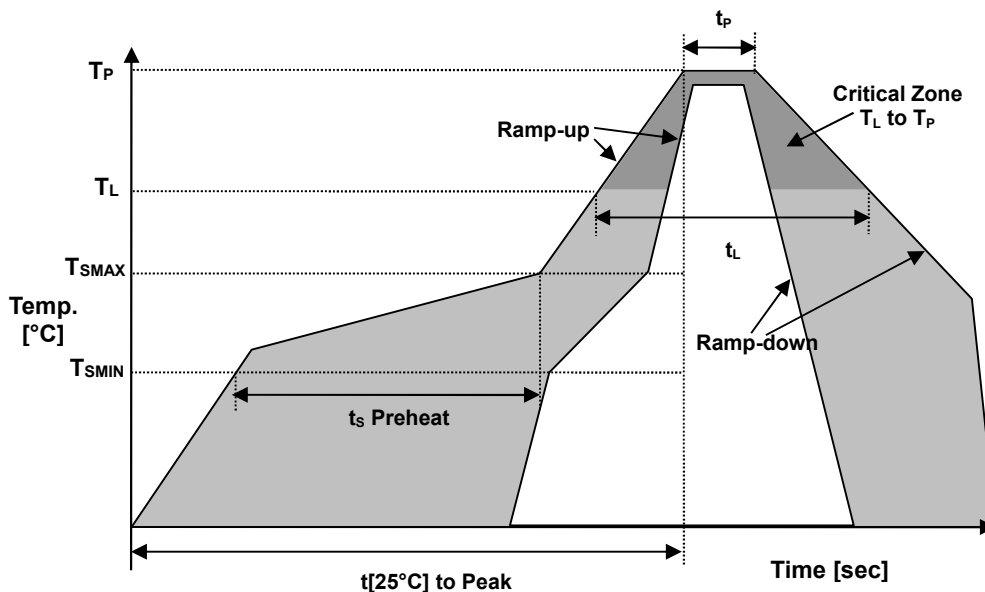

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_S	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_P	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t_L	60-150 sec.

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

April 2016