



Parameters	Specification	Unit	
Center frequency (Fc)	925.000	MHz	
Insertion Loss (922~928 MHz), typ / max	3.2 / 3.5	dB	
Amplitude Ripple (922~928 MHz), typ / max	0.4 / 1.0	dB	
VSWR (922~928 MHz), typ / max	1.6 / 2.0	-	
Absolute Attenuation, Min/typ	DC ~ 700 MHz	-40 / -60	dB
	700 ~ 894 MHz	-45 / -52	dB
	894 ~ 915 MHz	-35 / -38	dB
	935 ~ 950 MHz	-15 / -26	dB
	950~ 2000 MHz	-45 / -50	dB
	2000~ 3000 MHz	-40 / -55	dB
In/Out Impedance	50	$\Omega$	
Maximum Working Power	+15	dBm	
Operating Temperature Range	-40 to +85	$^{\circ}\text{C}$	
Storage Temperature	-40 to +85	$^{\circ}\text{C}$	

### Dimension

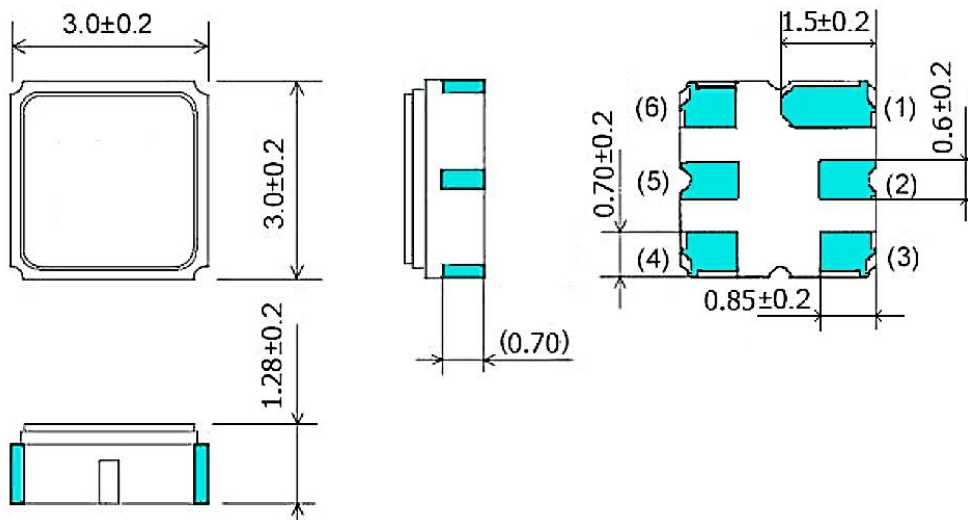

Pin Description	
1,3,4,6	Ground
2	In
5	Out

### Frequency Characteristics

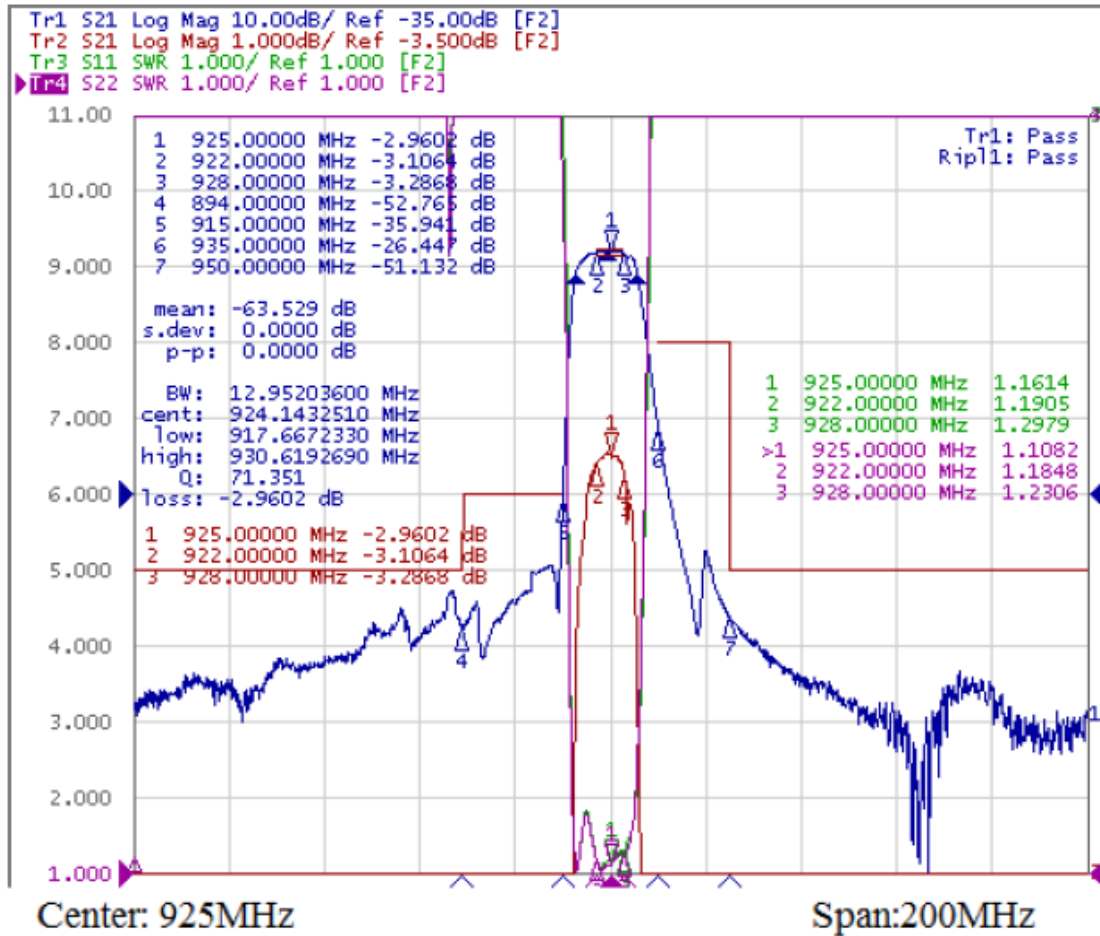

### APPROVAL

DRAWN BY	CP, March 05, 2018
APPROVED BY	JL, March 05, 2018
REVISION	A, Initial Release