




Parameters		Value	Unit
Center Frequency (Fo)		915.000	MHz
Bandwidth		Fo ± 2.5	MHz
Insertion Loss in BW, max		3.2	dB
Ripple in BW, max		0.7	dB
VSWR in BW, max		2.0 : 1	Ratio
Attenuation, min	@ 452 MHz	55	dB
	@ 806 MHz	40	dB
	@ 849 MHz	40	dB
	@ 901 MHz	10	dB
	@ 932 MHz	10	dB
	@ 1900 MHz	33	dB
Input/Output Impedance		50	Ω
Power, max		1	W
Operating Temperature Range		-40 ~ +85	°C

Dimension

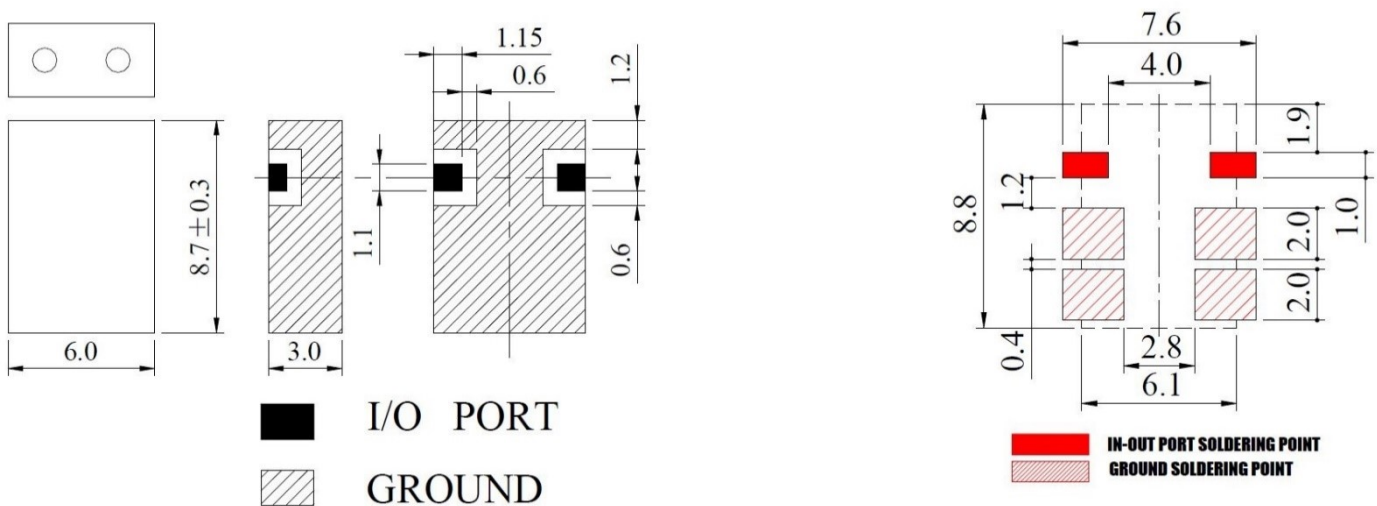

Unit: mm

Frequency Characteristics

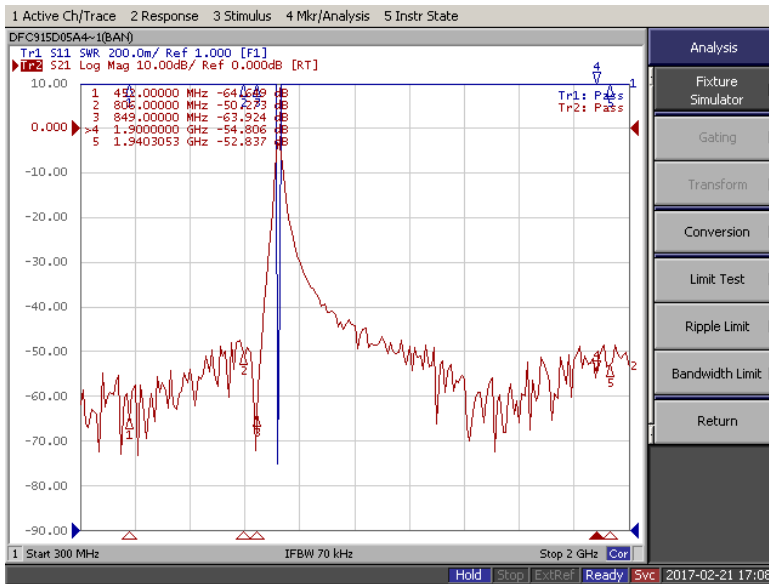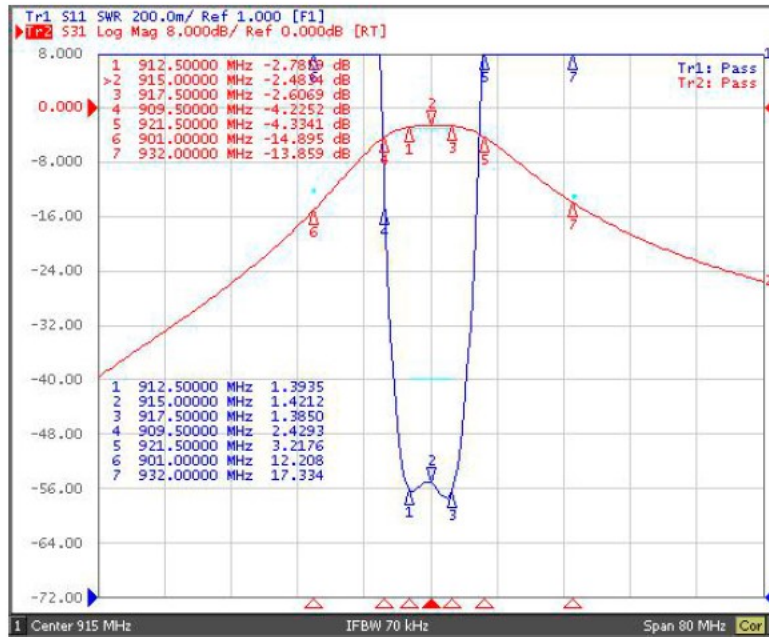

APPROVAL

RALTRON	
DRAWN BY:	AR, May 21, 2019
APPROVED BY:	CP, May 21, 2019
REVISION:	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.