


PARAMETERS		VALUE	UNIT
Frequency Range		2400.000 ~ 2500.000	MHz
Insertion Loss, max	@ 25°C	0.5	dB
	@ -40 ~ +85°C	0.6	dB
Attenuation, min	@ 4800 ~ 5000 MHz	35	dB
	@ 7200 ~ 7500 MHz	25	dB
VSWR		1.5	-
Impedance		50	Ω
Power Capacity		2	W
Moisture Sensitivity Levels		LEVEL 1	-
Operating Temperature Range		-40 ~ +85	°C
Storage Temperature Range		-40 ~ +85	°C
Storage Condition Before Soldering (Included Packaging Material)	Storage Temperature Range	+5 ~ +40	°C
	Relative Humidity	30 ~ 70	%


Dimension

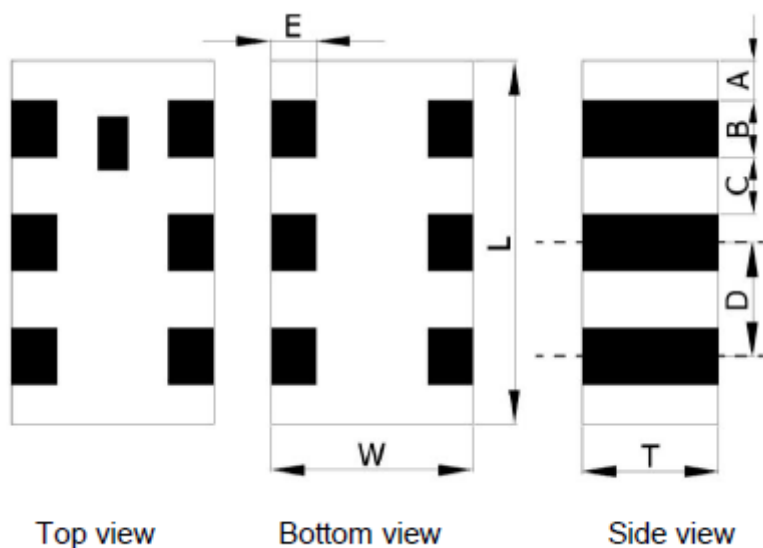

Symbol	Dimension (mm)
L	1.60 ± 0.15
W	0.80 ± 0.15
T	0.60 ± 0.10
A	0.175 ± 0.15
B	0.25 ± 0.15
C	0.25 ± 0.15
D	0.50 ± 0.15
E	0.20 ± 0.15

CONSTRUCTION

Top view



PIN	Connection	PIN	Connection
1	GND	4	GND
2	Input port	5	Output port
3	GND	6	GND

■ ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	COMPLIANT
REACH-SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
TERMINATION FINISH	Au



Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.

August 05, 2019