



### Electrical Specification

PARAMETERS		VALUE	UNIT
Frequency Range		2400.000 ~ 2500.000	MHz
Insertion Loss, max	@ 2400 ~ 2500 MHz	0.48	dB
Return Loss	@ 2400 ~ 2500 MHz	12	dB
Attenuation, min	@ 4800 ~ 5000 MHz	35	dB
	@ 7200 ~ 7500 MHz	35	dB

### Dimension

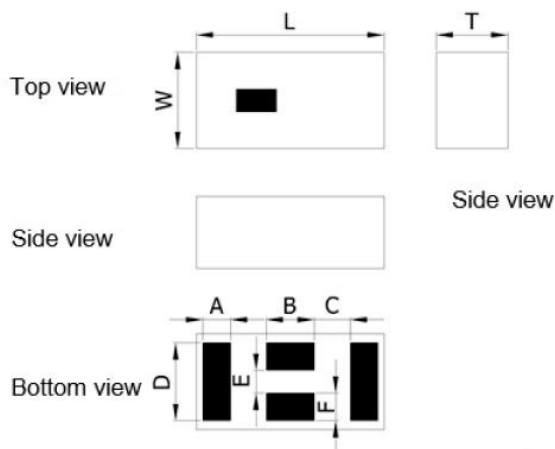


	L	W	T	A	B
Dimension (mm)	1.60 ± 0.10	0.80 ± 0.10	0.35 ± 0.10	0.225 ± 0.05	0.40 ± 0.05
	C	D	E	F	
Dimension (mm)	0.30 ± 0.05	0.65 ± 0.05	0.21 ± 0.05	0.22 ± 0.05	



PIN	Connection	PIN	Connection
1	Input port	3	Output port
2	GND	4	GND

### Frequency Characteristics

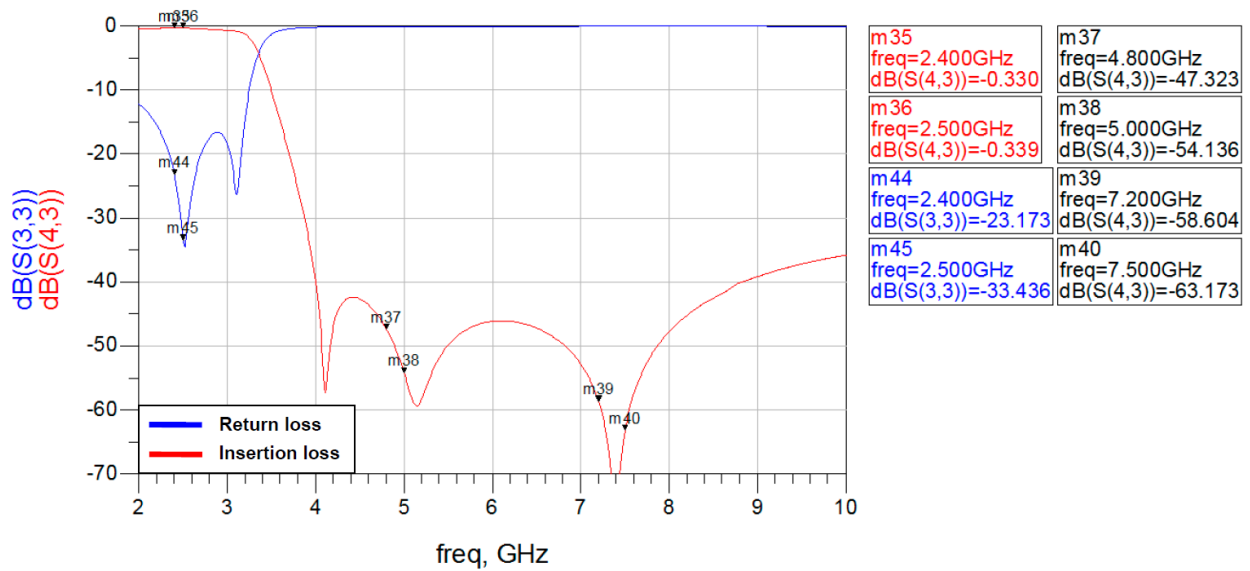

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.

August 12, 2019