

DOME ANTENNA

Page 1 of 5

RDT-14860

SPECIFICATIONS

ANTENNA		
PARAMETER		VALUE
Frequency Ranges	GPS: 1575.42 MHz / 1227.60 MHz / 1176.45 MHz	
	GLONASS: 1598~1605 MHz / 1242~1248 MHz	
	BeiDou: 1575.42 MHz / 1278.75 MHz / 1191.795 MHz	
Output VSWR, max		1.5
Impedance		50 Ω
Peak Gain	Zenith	4.5 dBic
	20° Elevation	-4.0 dBic
Phase Center, Maximum		2 mm
Axial Ratio	Zenith	≤ 2.0
	20° Elevation	≤ 4.0
Front to Rear Ratio		≥ 20 dB
Polarization		RHCP
Connector Type		TNC-K


LNA		
PARAMETER		VALUE
Frequency Ranges	GPS: 1575.42 MHz / 1227.60 MHz / 1176.45 MHz	
	GLONASS: 1598~1605 MHz / 1242~1248 MHz	
	BeiDou: 1575.42 MHz / 1278.75 MHz / 1191.795 MHz	
DC Voltage		3.3 to 9.0 V
DC Current, max		45 mA
LNA Gain		38 $\pm$ 3 dB
Noise Figure, max		1.5 dB
Out Band Rejection	F _H + 100 MHz	≥ 35 dB
	F _L - 100 MHz	≥ 35 dB
Output VSWR, max		2.0

DOM E ANTENNA

Page 2 of 5



RDT-14860

■ MECHANICAL SPECIFICATIONS


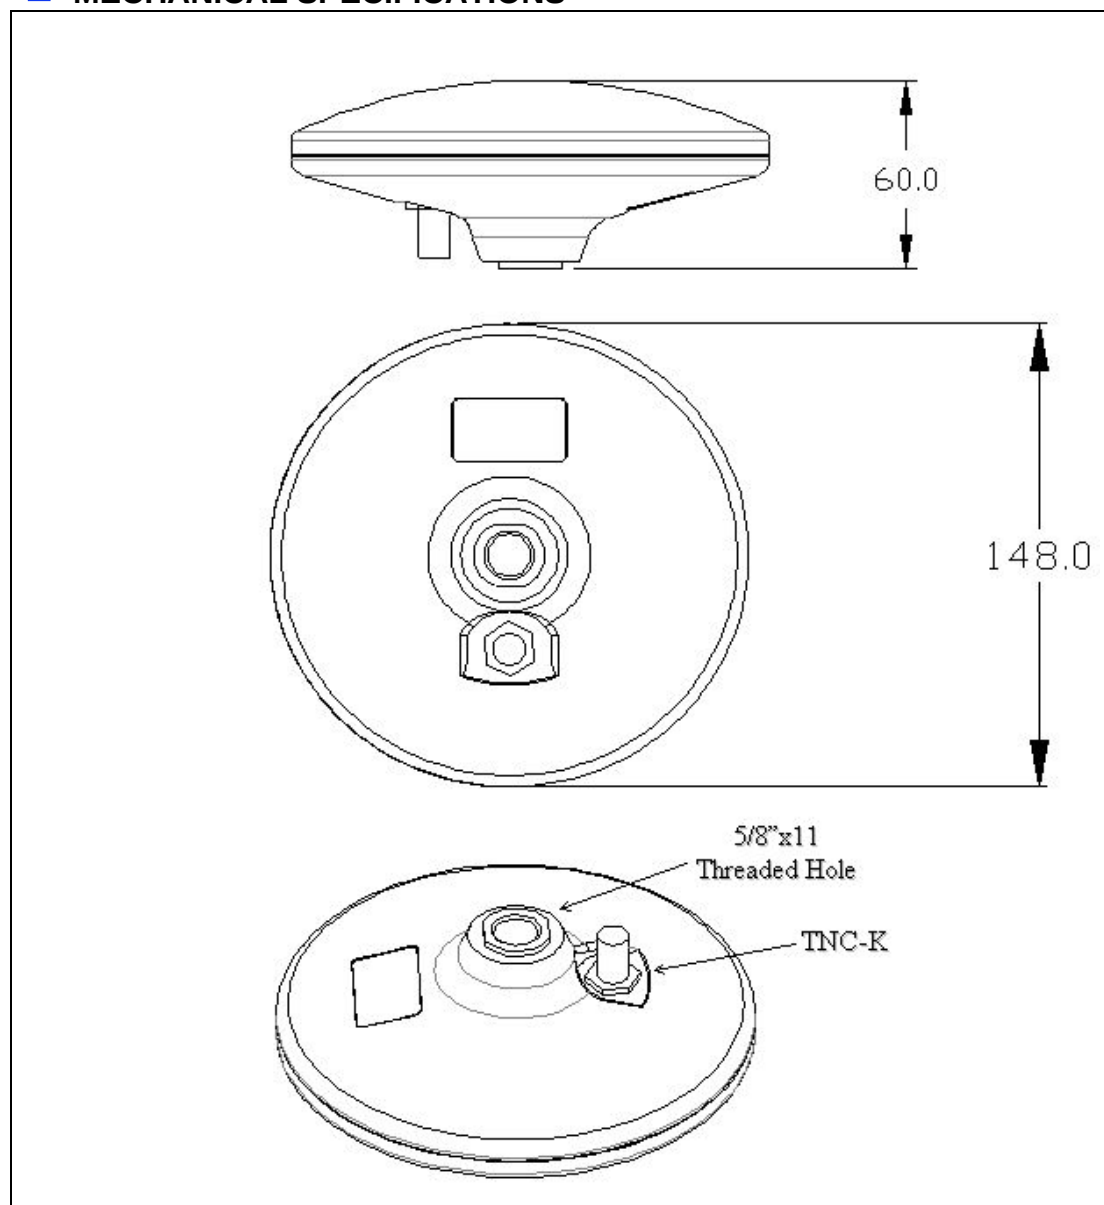


Frequency Characteristics

Patch Test Curve

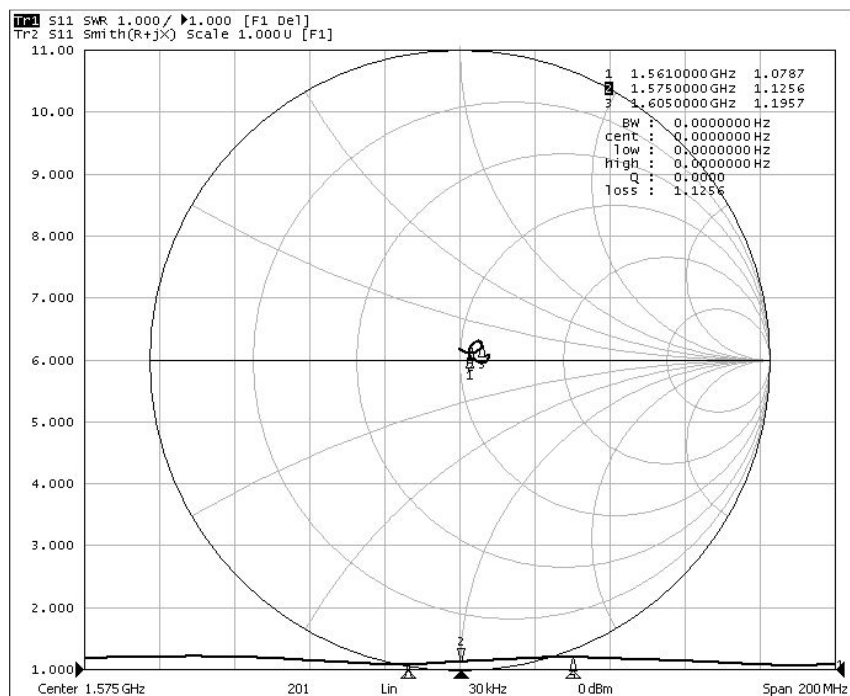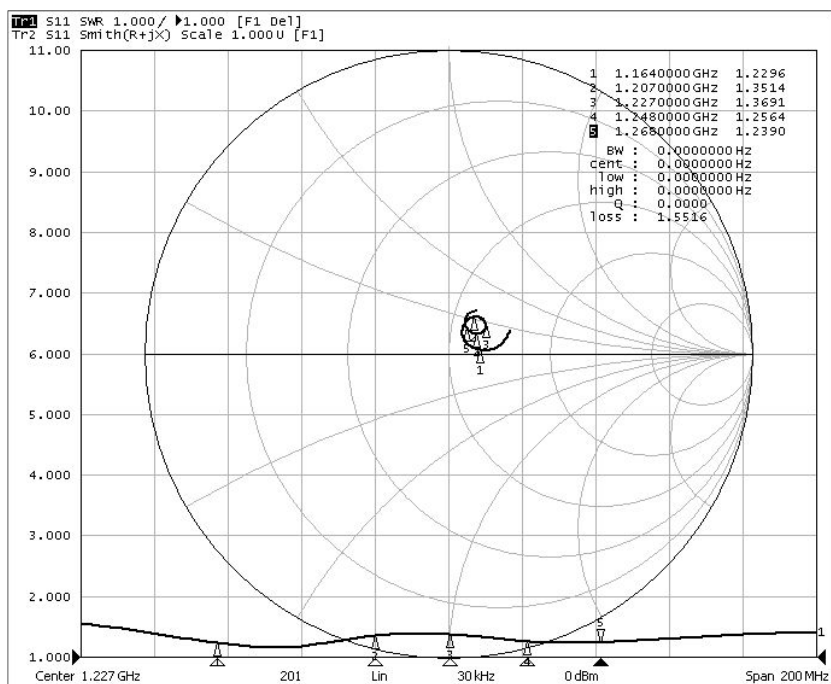

LNA Test Curve

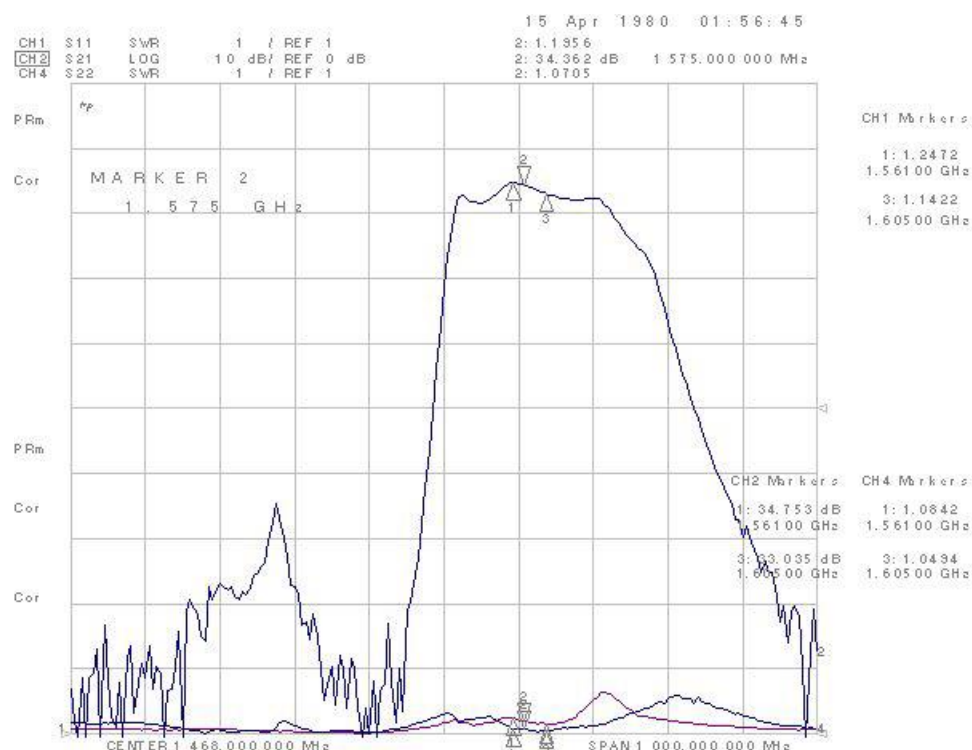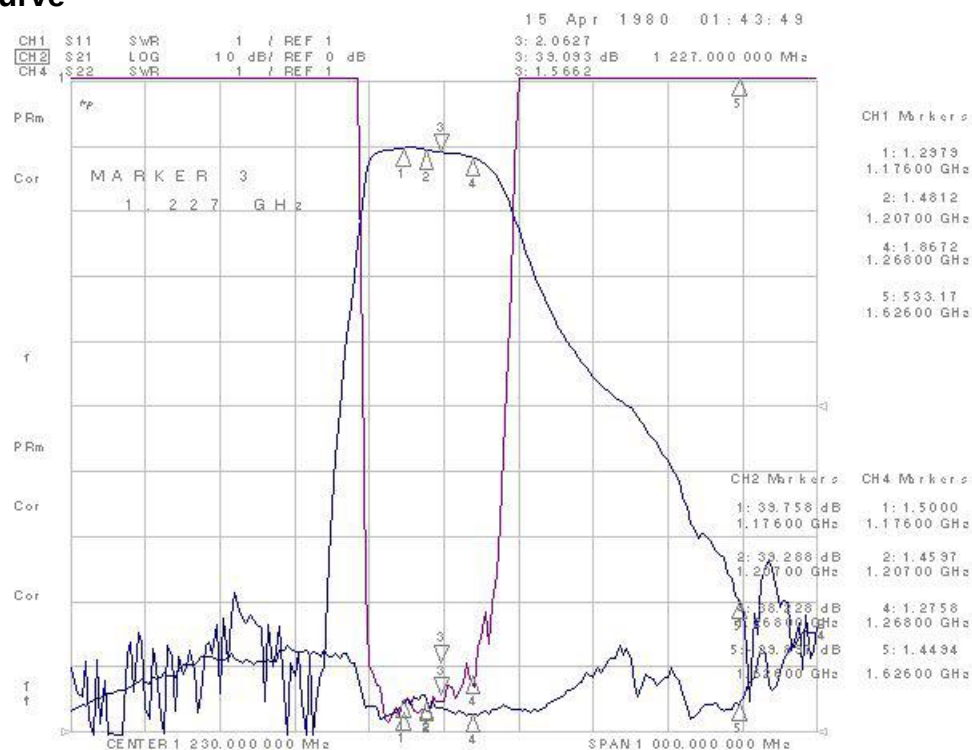

■ **ENVIRONMENTAL SPECIFICATIONS**

PARAMETER	VALUE
Operating Temperature Range	-40 to +80°C
Storage Temperature Range	-40 to +85°C
ESD Protection	Observe ESD precautions when handling

■ **APPROVAL**

RALTRON	
DRAWN BY	F. Parra, 18 November 2015
APPROVED BY	F. Parra, 18 November 2015
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.