


## ❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 40	GHz
Impedance	50	$\Omega$
Power Handling, min	2	W
Connector	2.92(JK)	dB
Weight	4	g
Operating Temperature Range	-55~ +125	$^{\circ}\text{C}$




## ❖ DIMENSIONS

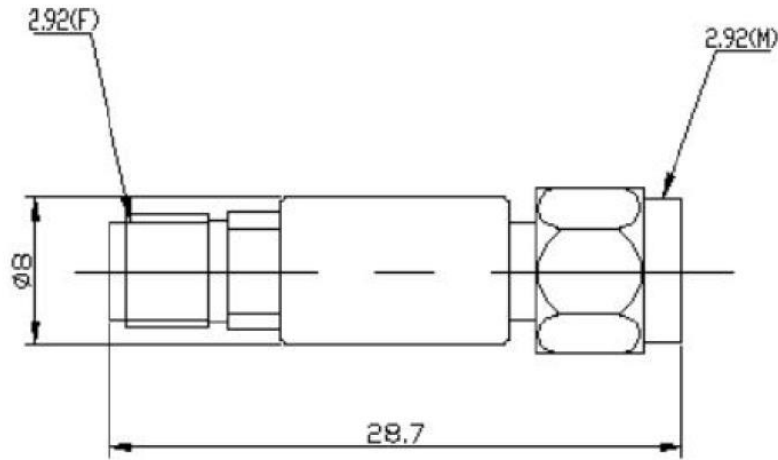

DESCRIPTION	MATERIAL	FINISHED
CONNECTOR MATERIAL	STAINLESS STEEL	
SURFACE TREATMENT	STAINLESS STEEL	PASSIVATED

FREQUENCY RANGE	ATTENUATION & ACCURACY	VSWR, max
	2 dB	
DC ~ 40 GHz	-1.1 $\pm$ 1.5	1.50

				 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	<b>Description</b> COAXIAL FIXED ATTENUATOR, 2W, DC-40GHz	
Projection		Date	Name		
Scale		Drawn	03.25.2024	AR	<b>Part Number</b> <b>RTA-12-2W50-ML-2</b>
--		Checked	03.25.2024	CP	
Dimensions in mm		Approved	03.25.2024	CP	