


## ❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 50	GHz
Impedance	50	$\Omega$
Power Handling, min	2	W
Connector	1.85(JK)	dB
Weight	5	g
Operating Temperature Range	-55~ +125	$^{\circ}\text{C}$




## ❖ DIMENSIONS

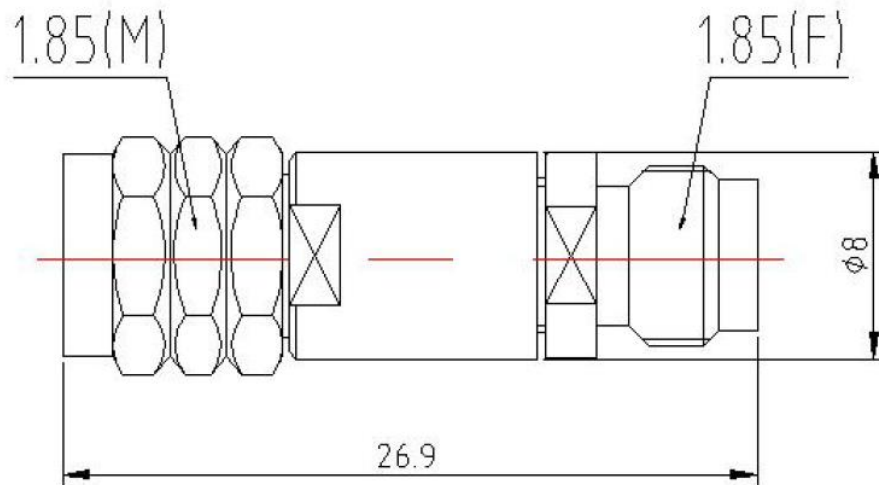

DESCRIPTION	MATERIAL	FINISHED
CONNECTOR MATERIAL	STAINLESS STEEL	
SURFACE TREATMENT	STAINLESS STEEL	PASSIVATED

FREQUENCY RANGE	ATTENUATION & ACCURACY	VSWR, max
	30 dB	
DC ~ 50 GHz	-1.1 $\pm$ .1.5	1.50

				 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description <b>COAXIAL FIXED ATTENUATOR, 2W, DC-50GHz</b>	
Projection		Date	Name		
Scale		Drawn	03.25.2025	AR	Part Number <b>RTA-12-2W50-ML-30</b>
--		Checked	03.25.2025	CP	
Dimensions in mm		Approved	03.25.2025	CP	