


ELECTRICAL SPECIFICATION

SPECIFICATIONS	SPECIFICATIONS	UNIT
Frequency Range	1500 ~ 3100	MHz
Insertion Loss, Max	1.0	dB
VSWR (max)	2.0	--
Unbalance Impedance	50	Ω
Balance Impedance	100	Ω
Phase Difference	$180^\circ \pm 10^\circ$	
Amplitude Difference, Max	2.0	dB
Impedance	50	Ω


MECHANICAL SPECIFICATION

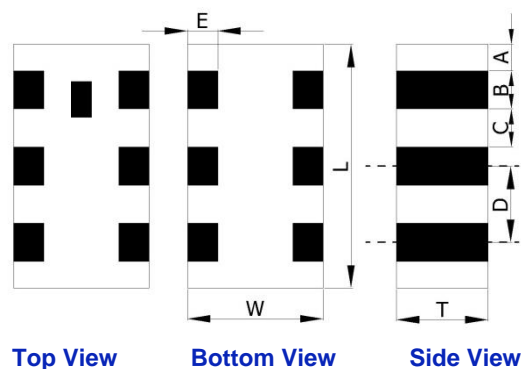

Unit: mm


	L	W	T	A
Dimension	2.00 ± 0.15	1.25 ± 0.15	0.95 ± 0.10	0.20 ± 0.20
	B	C	D	E
Dimension	0.30 ± 0.20	0.35 ± 0.20	0.65 ± 0.20	0.30 ± 0.20

Top View

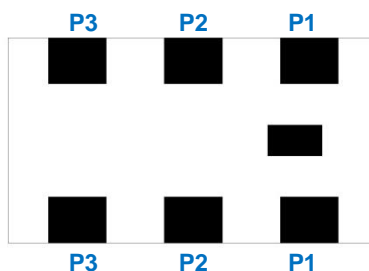


PIN	1	2	3	4	5	6
Connection	Unbalanced port	GND	Balanced port	Balanced port	GND	nc

Typical Electrical Performance

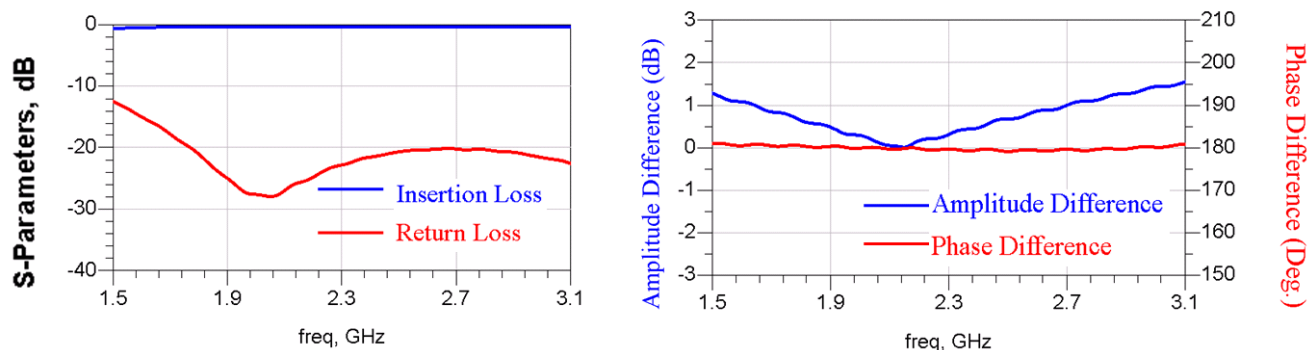


Solder Land Pattern

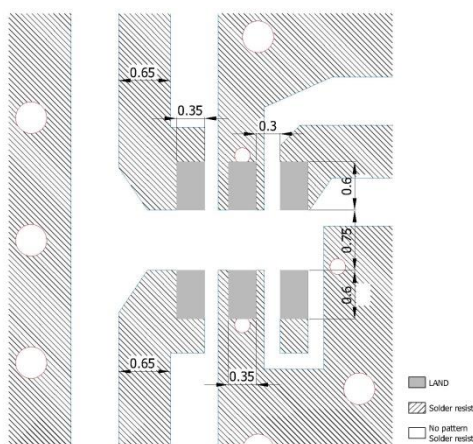

Unit : mm

Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

REFLOW PROFILE

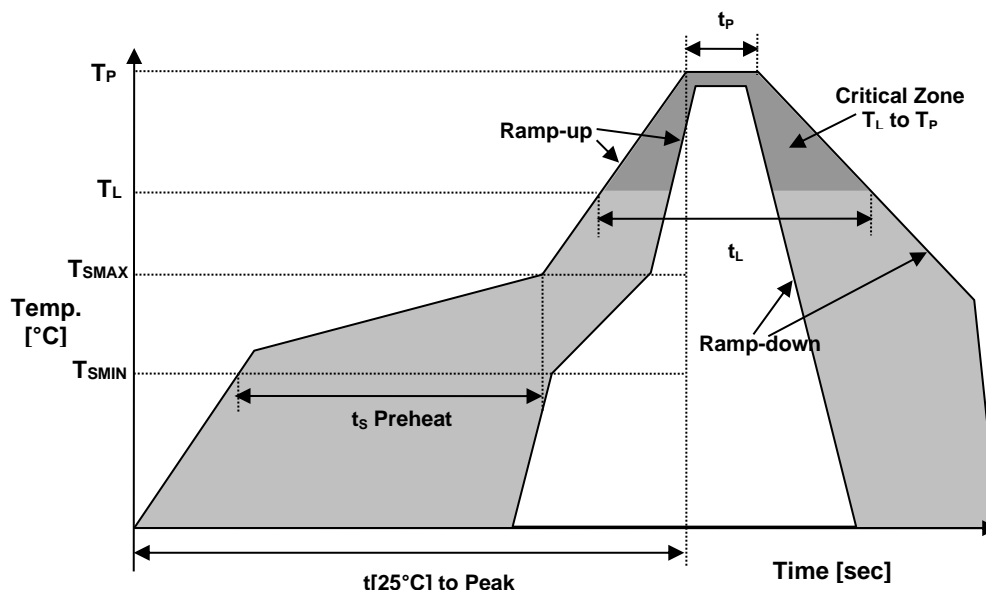

Reflow profile		
Temperature Min Preheat	T _{SMIN}	150°C
Temperature Max Preheat	T _{SMAX}	200°C
Time (T _{SMIN} to T _{SMAX})	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	250°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _p	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS2	6/6 COMPLIANT & LEAD FREE
REACH-SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
TERMINATION FINISH	Au



APPROVAL

RALTRON	
DRAWN BY:	F. Parra, 29 January 2015
APPROVED BY:	F. Parra, 29 January 2015
REVISION:	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.