




## ❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Working Frequency	DC ~ 6	GHz
Impedance	50	$\Omega$
VSWR, max	2.0	-
Working Voltage, max	335	V
Insulation Resistance	1000	M $\Omega$
Contact Resistance, max	5	m $\Omega$
Outer Contact, max	2.5	m $\Omega$
Working Temperature Range	-55 ~ +125	$^{\circ}$ C

## ❖ DIMENSIONS

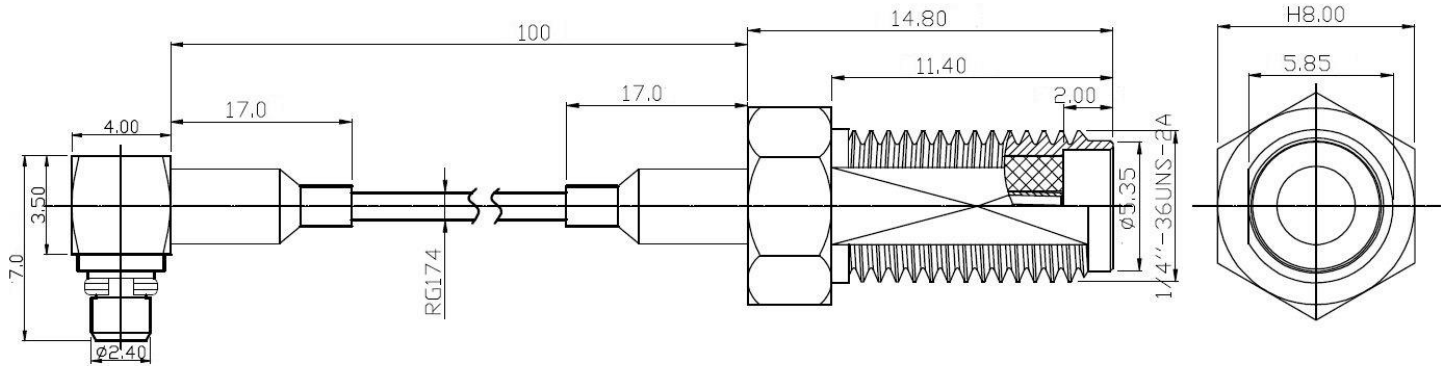

Description	Material	Finished
Heat Shrinkable Tube	-	Black
RG174 Cable	-	Black
SMA Female	Cu	Gold Plating
MMCX Male	Cu	Gold Plating

					 A RAMI TECHNOLOGY Company
Rev	Change	Date	Name		
Projection	Scale	Date	Name	Description	
 Dimensions in mm	--	Drawn 03.31.2021 AR Checked 03.31.2021 CP Approved 03.31.2021 CP		<b>SMA TO MMCX FOR RG174 CABLE</b> Part Number <b>RCB-15-A-100-12-SD</b>	
					<b>A</b>