

ELECTRICAL SPECIFICATION

PARAMETER		VALUE
Frequency Range		27.000 ~ 220.000 MHz
Operating Temperature Range		-20°C ~ +70°C Standard -40°C ~ +85°C X -40°C ~ +125°C X1
Frequency Stability**		±20 ppm, ±50 ppm, ±100ppm
First Year Aging		±3ppm
Storage Temperature Range		-55°C ~ +125°C
Supply Voltage (Vcc), ±5%		1.8 V, 2.5 V, 3.3 V, 2.5 ~ 3.3 V
Supply Current 1.8V/ 2.5V/ 3.3V		35/ 40/ 40 mA max
Output HCSL	Symmetry (Duty Cycle)	45 % ~ 55 %
	Rise / Fall Time	0.6 ns max at 20 % ~ 80 % output swing level
	Logic "0" Level	V _{OL} = -0.15 V min
	Logic "1" Level	V _{OH} = 1.0 max
	Load	50 Ω
Enable / Disable Function		Pin 1: High or Open / Output enabled (Pins 4 & 5) Pin 1: Low / Output disabled (High impedance)
Output Enable Time		10 ms
Output Disable Time		200 ns
Output Swing		0.50 V
Stand By Current		10 μA
Start Up Time		10 ms
Phase Jitter RMS @100MHz*		@Vcc=3.3V (12kHz ~ 20 MHz) 200 fs
Phase Noise @100MHz, Vcc=3.3V*	@ 10Hz	-80 dBc/Hz
	@ 100Hz	-105 dBc/Hz
	@ 1kHz	-130 dBc/Hz
	@ 10kHz	-144 dBc/Hz
	@ 100kHz	-152 dBc/Hz
	@ 1MHz	-155 dBc/Hz
	@ 10MHz	-158 dBc/Hz

Note: *The Phase Noise/Jitter value varies with frequency and supply voltage.

Note**: Not all Stabilities are available for all operating temperature ranges. See the table below.

STABILITY AVAILABLE AT EACH OPERATING TEMPERATURE


	-20°~70°C	-40°~85°C	-40°~100°C	-40°~125°C
±20ppm	●	▲		
±25ppm	●	●		
±30ppm	●	●	▲	
±50ppm	●	●	●	▲
±100ppm	●	●	●	●

Inclusive of 25° Tolerance, Operating Temperature Range, Voltage & Load Variations

●: Available

▲: Contact for availability

MECHANICAL SPECIFICATION

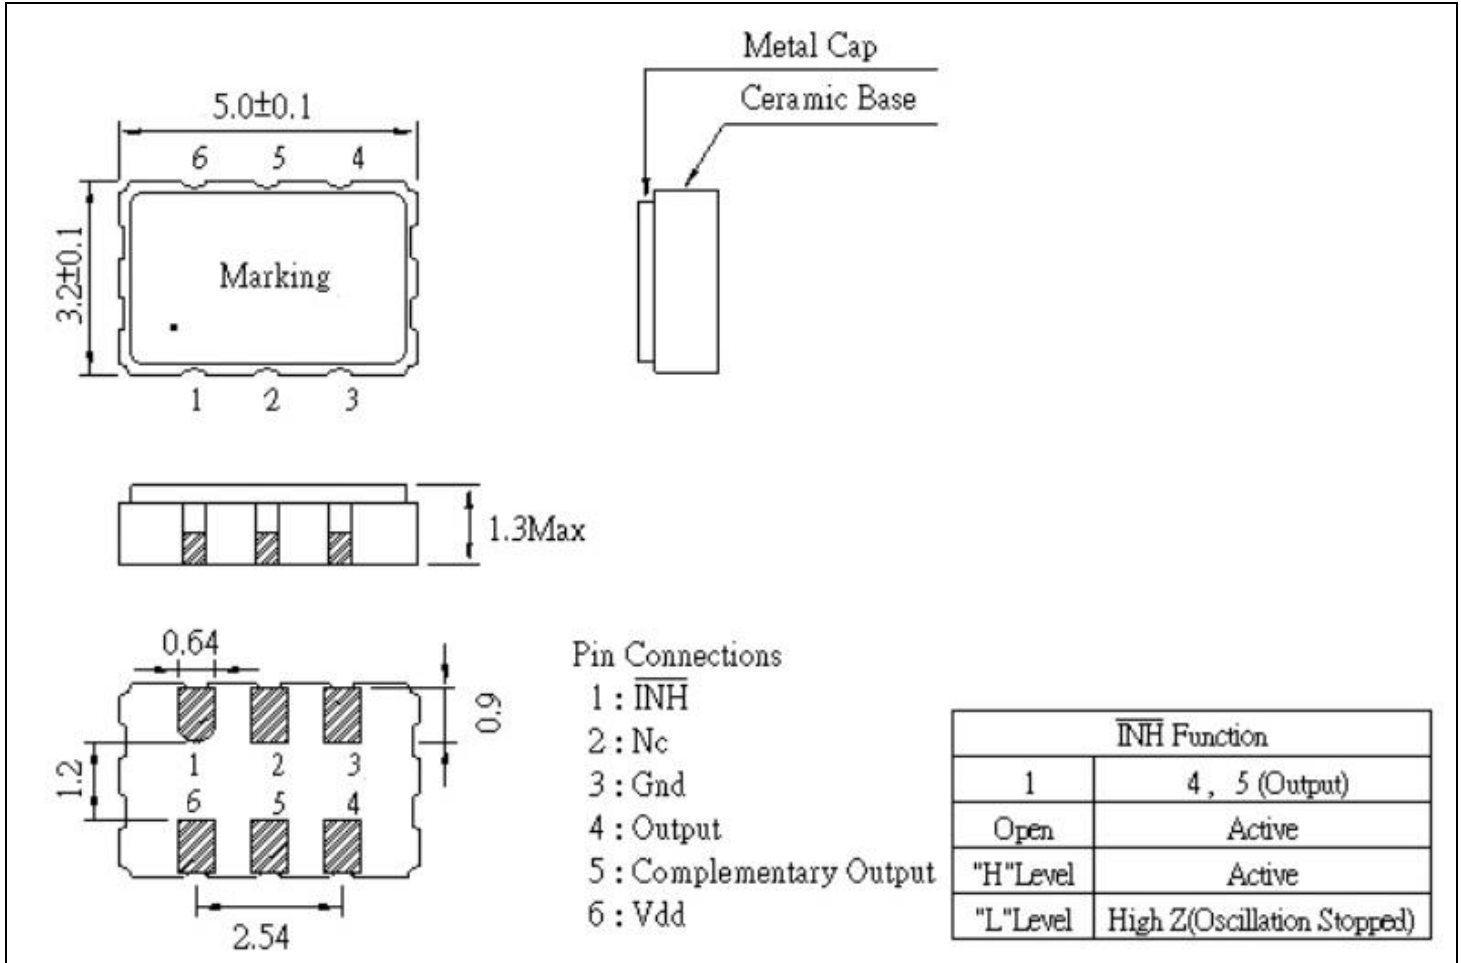


PART NUMBERING SYSTEM

TYPE	SERIES	FREQUENCY (MHz)	SUPPLY VOLTAGE (Vcc)	STABILITY (ppm)	TEMPERATURE RANGE (°C)	SYMMETRY (Duty Cycle)	TAPE & REEL
Clock Oscillator CH	5032	27.000 ~ 220.000 MHz	1.8: Vcc=1.8 2.5: Vcc=2.5 3.3: Vcc=3.3 L: Vcc=2.5~3.3	20: ±20 ppm 50: ±50 ppm 100: ±100 ppm	blank: -20°C to +70°C X: -40°C to +85°C X1: -40°C to +125°C	T: 45 to 55%	TR

EXAMPLE: CH5032-100.000-3.3-100-X-T-TR

Surface Mount CH5032 HCSL Oscillator, 5.0 x 3.2 mm, 100.000 MHz, 3.3 VDC Supply Voltage, ±100 ppm Stability from -40°C to +85°C, Symmetry 45% to 55%, Tape and Reel Packaging.

■ **REFLOW PROFILE**

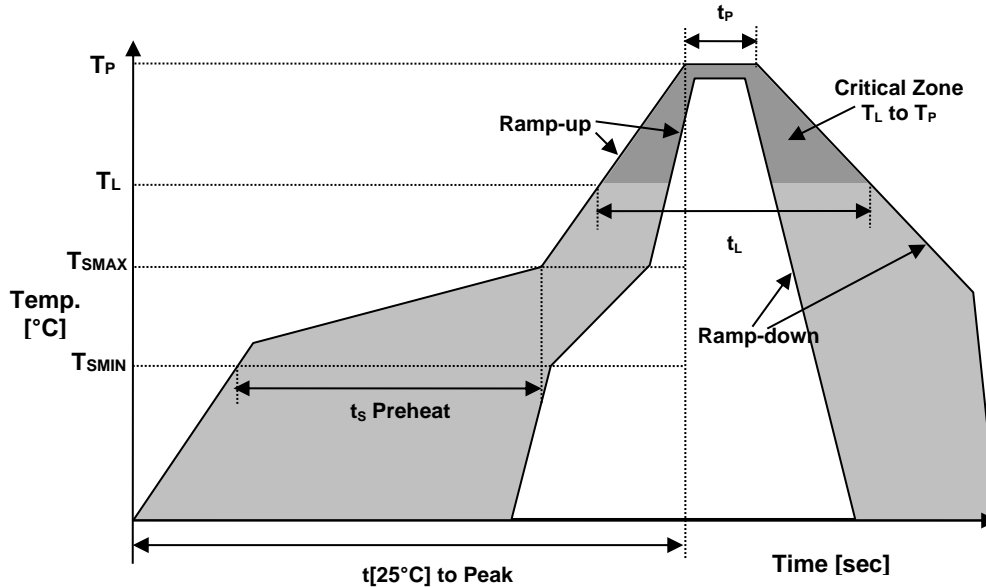

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t_{[25^\circ\text{C}] \text{ to Peak Temperature}}$	$t_{[25^\circ\text{C}] \text{ to Peak}}$	480 sec.
Time	t_L	60-150 sec.

■ **ENVIRONMENTAL**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH SVHC	COMPLIANT
RoHS	COMPLIANT
TERMINATION FINISH	Au



Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.