


Application: Optical DSPs

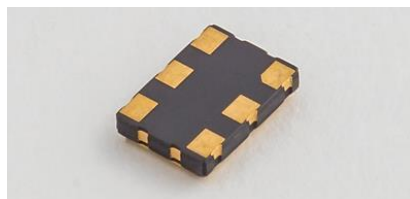


■ **ELECTRICAL SPECIFICATION**


PARAMETER		VALUE
Frequency Range		13.500 ~ 333.330 MHz
Operating Temperature Range		-20°C ~ +70°C Standard -40°C ~ +85°C Extended
Frequency Stability		±25 ppm, ±50 ppm, ±100ppm
Storage Temperature Range		-55°C to +125°C
Supply Voltage (Vcc)		1.8 V, 2.5 V, 3.3 V, 2.5 ~ 3.3 V
Supply Current		40 mA max
Output LVDS	Symmetry at 50% Wave form	40% to 60% 45% to 55%
	Rise / Fall Time	1 ns max at 20% ~ 80% Output swing level
	Logic "0" Level	0.9 V min
	Logic "1" Level	1.6 V max
	Load	100 Ω (OUT – OUTN Differential)
Enable / Disable Function		Pin 1: High or Open / Output enabled (Pins 4 & 5) Pin 1: Low / Output disabled (High impedance)
Phase Noise @ 1 MHz *	@ 156.250 MHz, 2.5 ~ 3.3 V	-155 dBc/Hz typ / 150 dBc/Hz max
Jitter (12 kHz ~ 20 MHz) @ 156.250 MHz*	1.8 V	100 fs typ / 150 fs max
	2.5 ~ 3.3 V	80 fs typ / 100 fs max

Note: * The Phase Noise/Jitter value vary with frequency and supply voltage. See examples below.


■ **OUTPUT WAVEFORM**

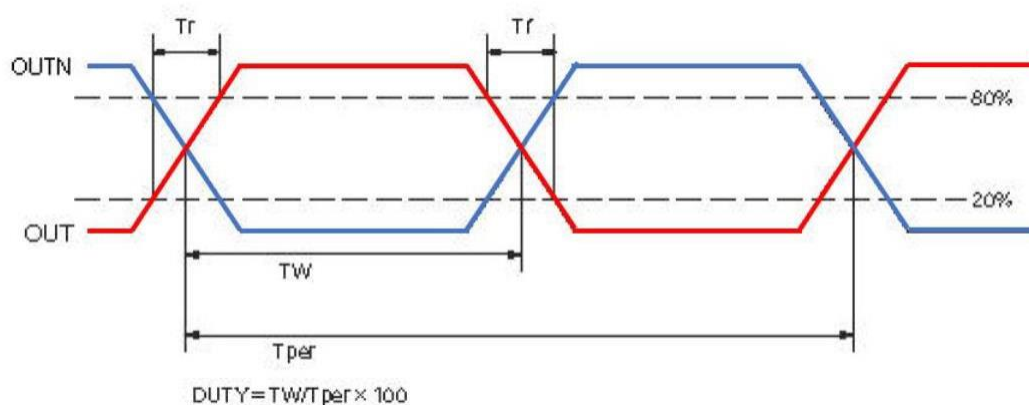


PHASE NOISE FOR 156.250 MHz @ 2.5 ~ 3.3 V

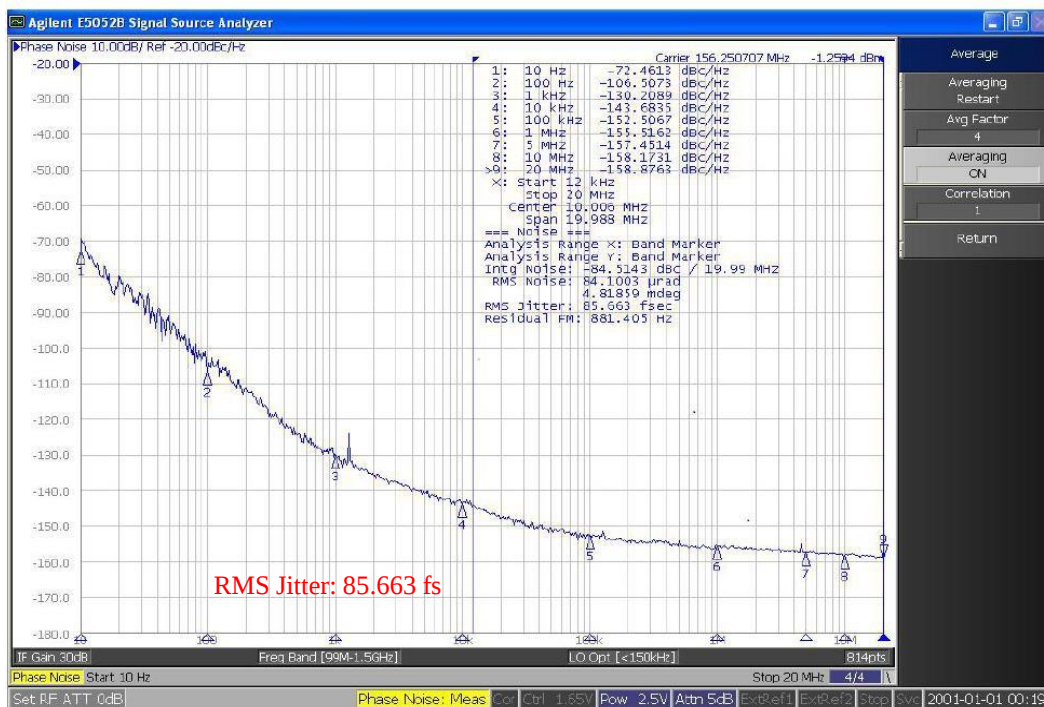


PHASE NOISE FOR 156.250 MHz @ 1.8 V

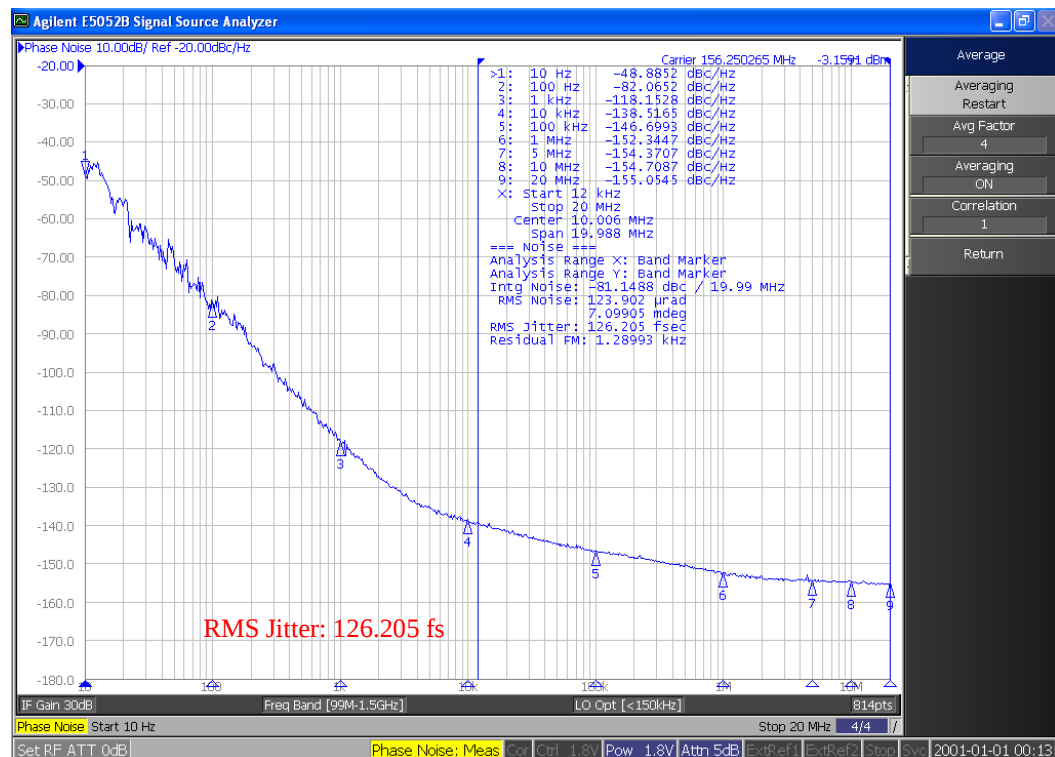

PHASE NOISE FOR 125.000 MHz @ 3.3 V

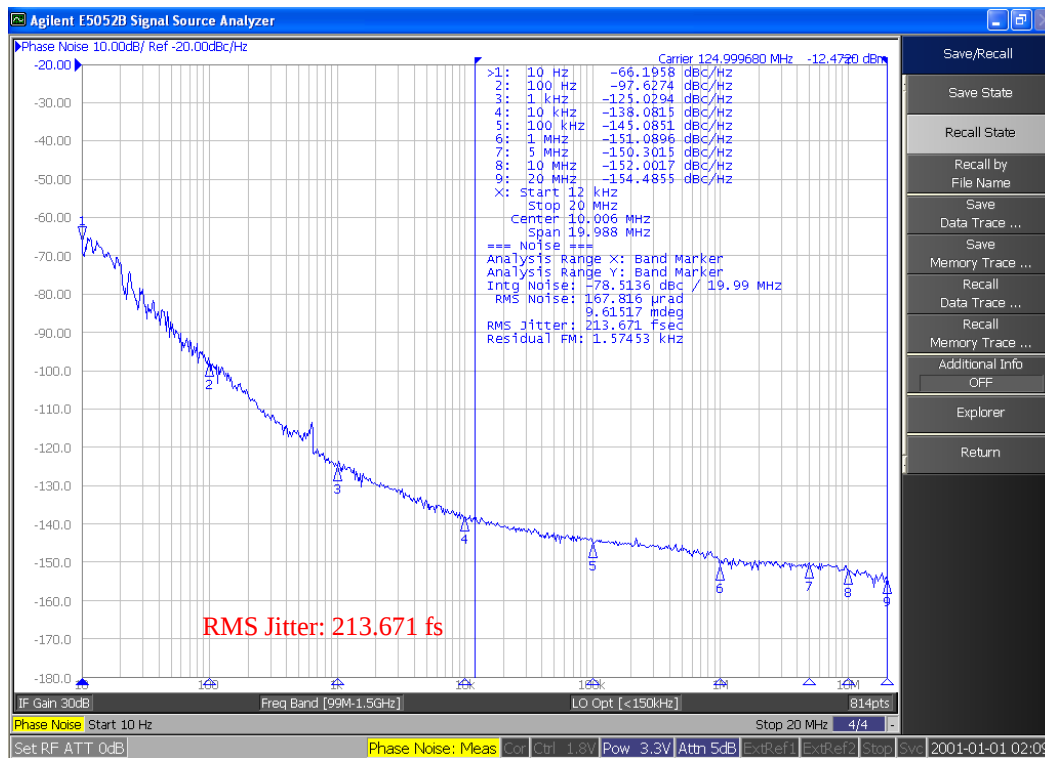


PHASE NOISE FOR 100.000 MHz @ 1.8 V

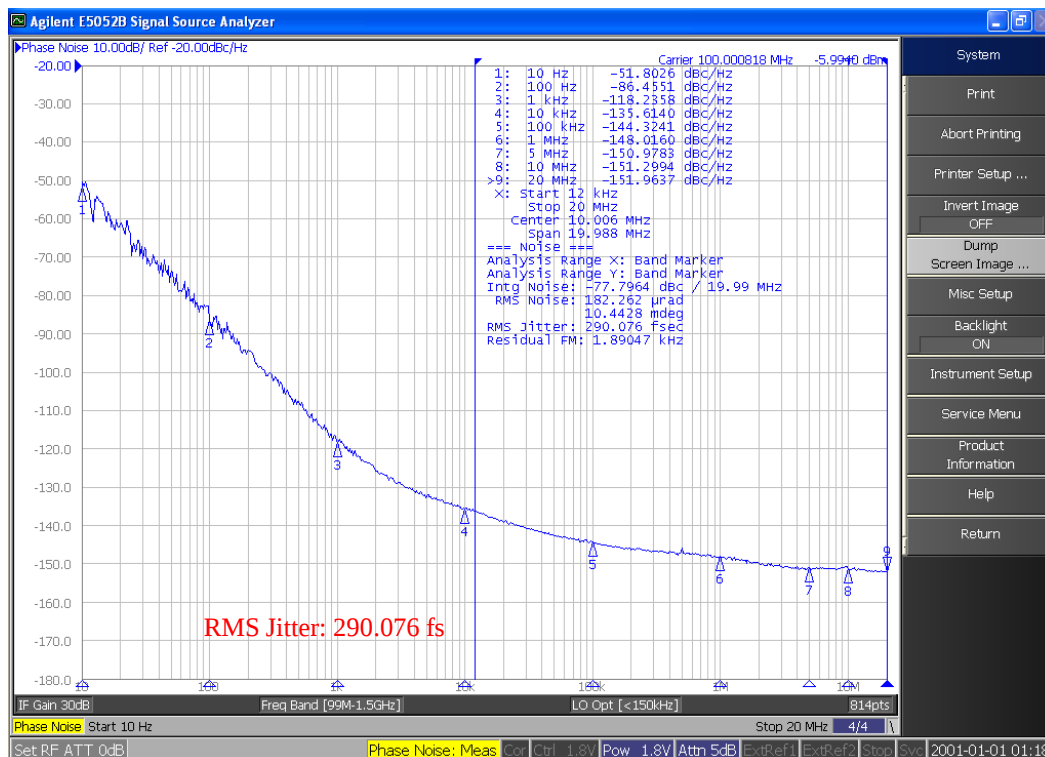


SERIES CL3225

PHASE NOISE FOR 50.000 MHz @ 3.3 V

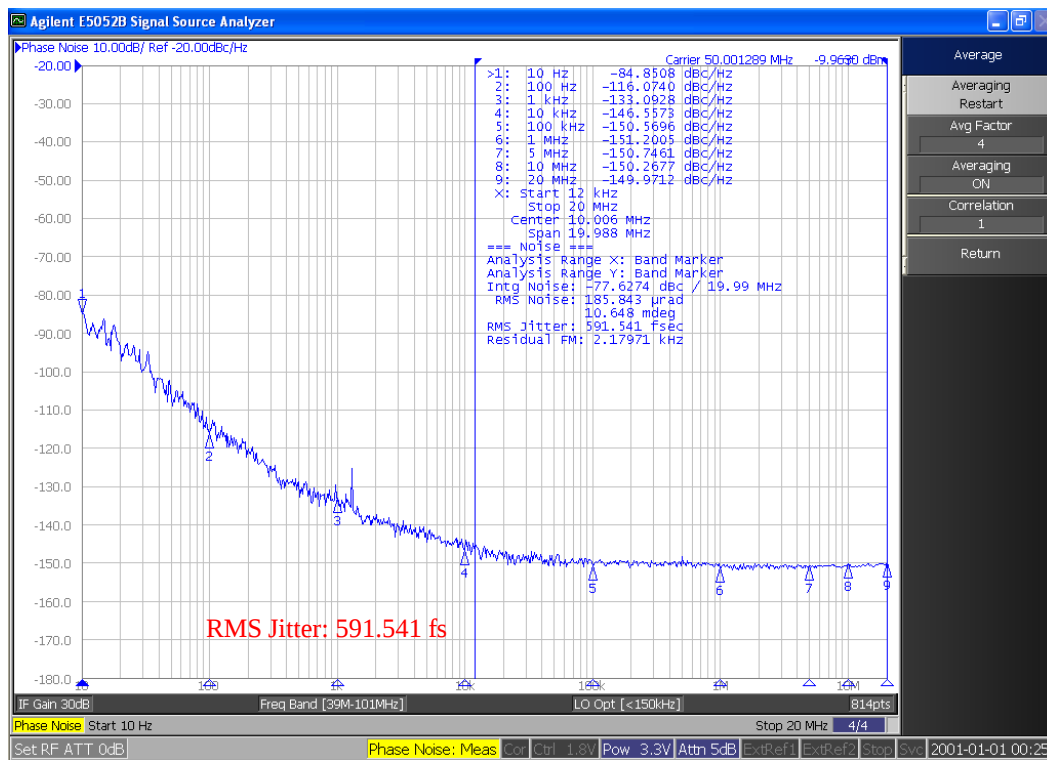


PHASE NOISE FOR 25.000 MHz @ 3.3 V

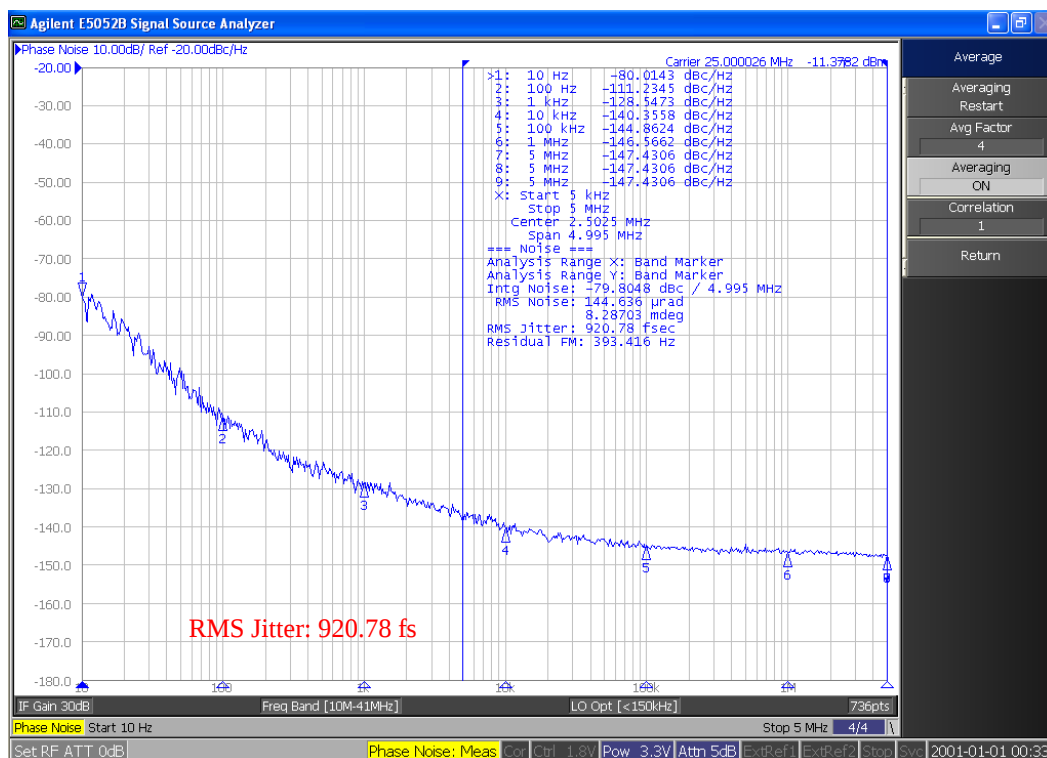


SERIES CL3225

MECHANICAL SPECIFICATION

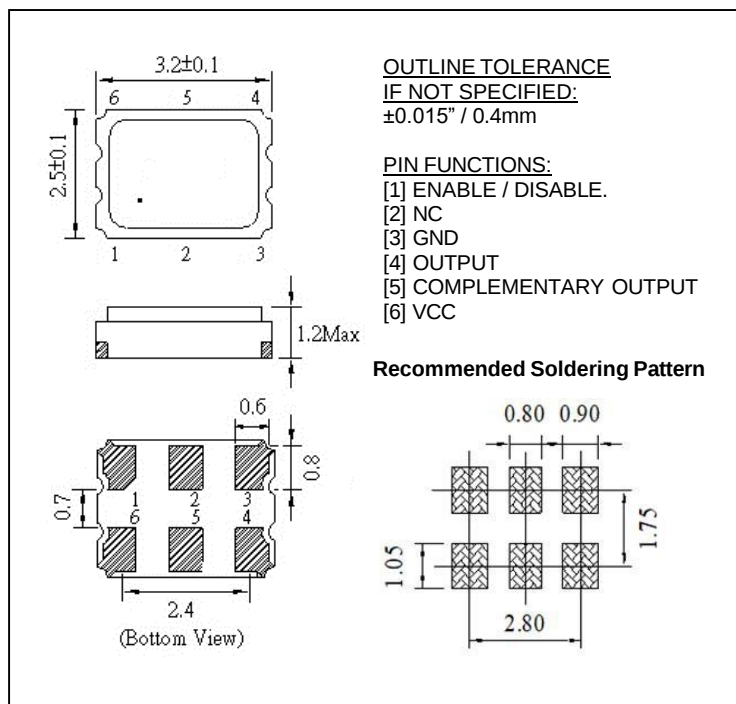

■ CARRIER TAPE DIMENSIONS

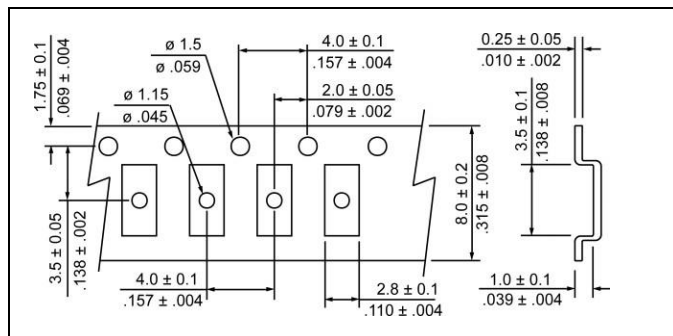

NOTE: REFER TO EIA-481 FOR DIMENSIONS NOT LISTED

■ PACKAGING

178 mm REEL DIAMETER
8 mm TAPE WIDTH, 4 mm PITCH
QUANTITY: 3000 PIECES PER REEL

■ PART NUMBERING SYSTEM


TYPE	SERIES	-	FREQUENCY (MHz)	-	SUPPLY VOLTAGE (Vcc)	-	STABILITY (ppm)	-	TEMPERATURE RANGE (°C)	-	SYMMETRY (Duty Cycle)	-	TAPE & REEL
Clock Oscillator CL	3225	-	13.500 ~ 200.000 MHz	-	1.8: Vcc=1.8 2.5: Vcc=2.5 3.3: Vcc=3.3 2.5 ~ 3.3: Vcc=L	-	25: ±25 ppm 50: ±50 ppm 100: ±100 ppm	-	blank: -20°C to +70°C X: -40°C to +85°C	-	blank: 40 to 60% T: 45 to 55%	-	TR

*Other ranges available. Please contact factory.

EXAMPLE: CL3225-155.520-2.5-25-X-T-TR

Surface Mount CL3225 LVDS Oscillator, 3.2 x 2.5 mm, 155.520 MHz, 2.5 VDC Supply Voltage, ± 25 ppm Overall Stability, from -40°C to +85°C, Symmetry 45% to 55%, Tape and Reel packaging.

REFLOW PROFILE

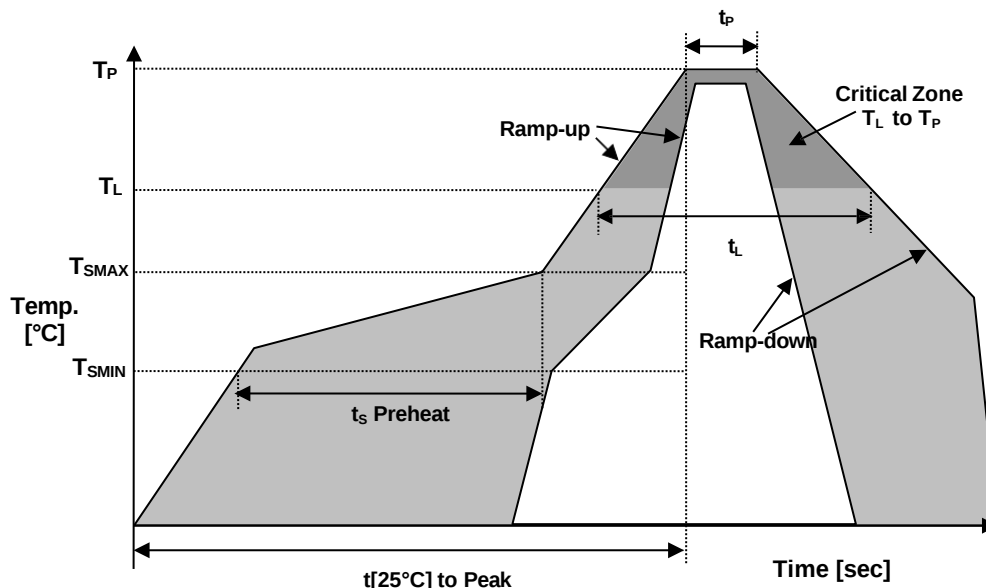

Reflow profile		
Temperature Min Preheat	T _{SMIN}	150°C
Temperature Max Preheat	T _{SMAX}	200°C
Time (T _{SMIN} to T _{SMAX})	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _p	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH SVHC	COMPLIANT
RoHS	COMPLIANT
TERMINATION FINISH	Au



March 2021

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.