

CO2016 SERIES: 2.0 x 1.6 mm CLOCK OSCILLATOR



■ FEATURES

- ULTRA MINATURE PACKAGE
- ESSENTIAL IN HIGH DENSITY PCB
- LOW SUPPLY VOLTAGE 1.8 AND 2.5 VDC AVAILABLE
- STANDBY FUNCTION

■ APPLICATIONS

- PRINTER SCANNER
- VGA CARD
- DVD
- DSC, DVC

■ ELECTRICAL SPECIFICATION

PARAMETER		VALUE		
Frequency Range		1.5 ~ 50.000 MHz		
Operating Temperature Range		-10°C ~ +70°C Standard		
		-40°C ~ +85°C Extended		
Frequency Stability ¹ **		±25 ppm, ±30 ppm, ±50 ppm, ±100 ppm		
Storage Temperature Range		-40°C to +85°C		
Supply Voltage (Vcc)		1.8V ±5%	2.5V ±5%	3.3V ±5%
Supply Current		2.5 mA max ~24 MHz 3.5 mA max ~40 MHz 4.5 mA max ~50MHz	3.0 mA max ~24 MHz 4.5 mA max ~40 MHz 5.0 mA max ~50 MHz	2.5 mA max ~24 MHz 3.5 mA max ~40 MHz 4.5 mA max ~50 MHz
Output CMOS	Symmetry	45% to 55% at 50% Vdd		
	Rise / Fall Time	10 nsec max at 10% to 90% Vdd		
	Logic "0" Level	Vcc x 0.1 V max		
	Logic "1" Level	Vcc x 0.9 V min		
	Load	15 pF max		
Enable / Disable Function		Pin 1: High or Open >> Output enabled Pin 3 Pin 1: Low >> Output disabled (High impedance)		

** Inclusive of 25°C tolerance, operating temperature range, voltage or load changes, aging, shock and vibration, consult factory for tighter stability options.


NOTES

¹ Not available at all frequencies, Contact Factory

² Check part numbering table below. For others contact factory.

CO2016 SERIES: 2.0 x 1.6 mm CLOCK OSCILLATOR

MECHANICAL SPECIFICATION (4 pin ceramic package)

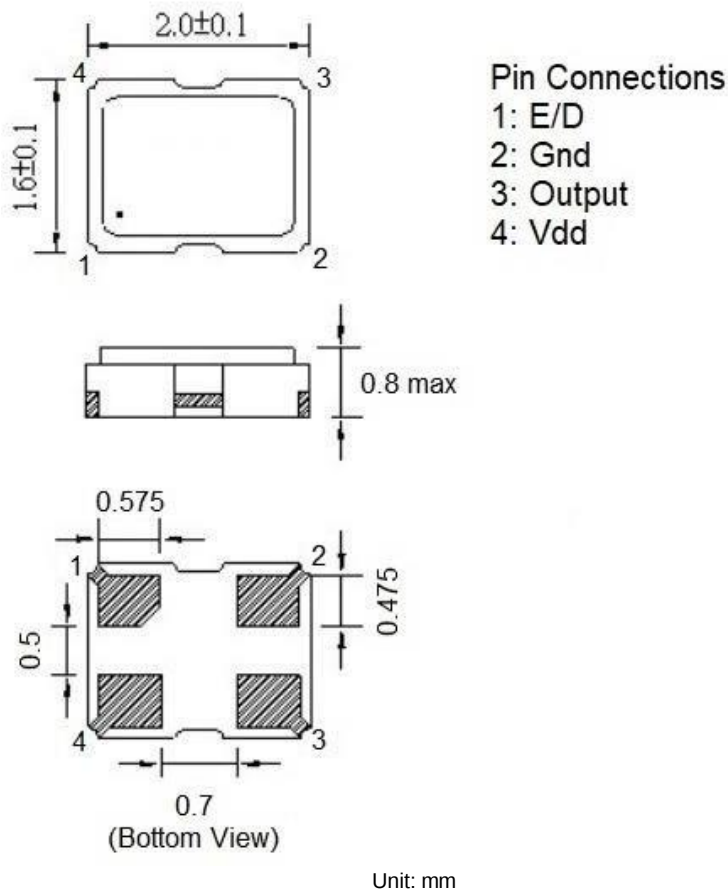

PART NUMBERING SYSTEM


TYPE	SERIES	-	FREQUENCY (MHz)	-	SUPPLY VOLTAGE (Vcc)	-	STABILITY (PPM)	-	TEMPERATURE RANGE	-	TAPE & REEL
Clock Oscillator	2016	-	1.5 ~ 50.000	-	1.8: Vcc=1.8 2.5: Vcc=2.5 3.3: Vcc=3.3	-	25: ±25 ppm 30: ±30 ppm 50: ±50 ppm 100: ±100 ppm	-	blank: -10°C ~ +70°C X: -40°C ~ +85°C	-	TR
CO	2016	-	12.800	-	2.5	-	50	-		-	TR

EXAMPLE: CO2016-12.800-2.5-50-TR

Surface Mount CO2016, 2.0 x 1.6 mm, 12.800 MHz, 2.5 VDC Supply Voltage, ±50 ppm Overall Stability, from -10°C to +70°C, Symmetry 45% to 55%, Tape and Reel packaging.

CO2016 SERIES: 2.0 x 1.6 mm CLOCK OSCILLATOR

REFLOW PROFILE

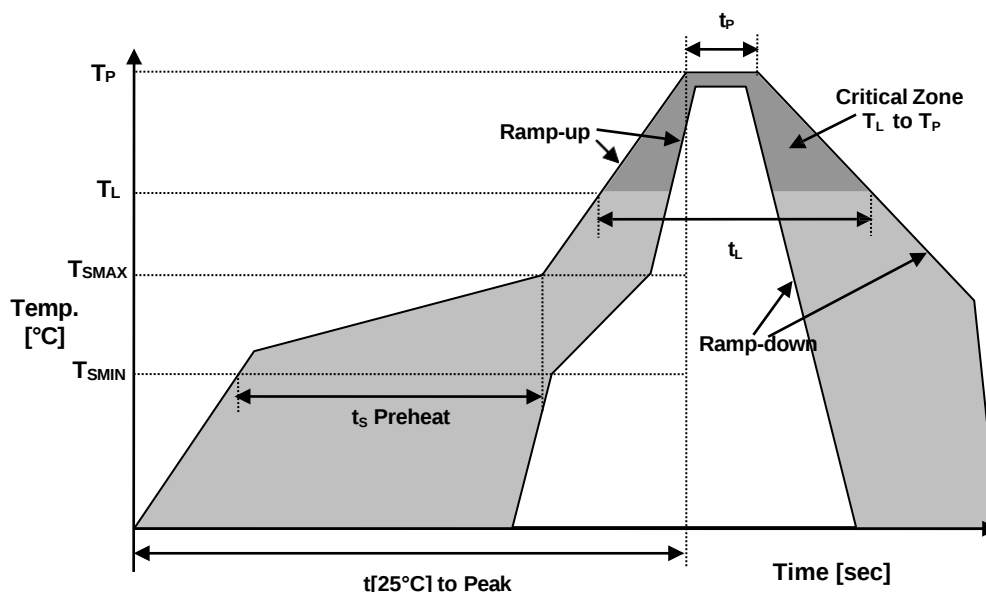

Reflow profile		
Temperature Min Preheat	T _S MIN	150°C
Temperature Max Preheat	T _S MAX	200°C
Time (T _S MIN to T _S MAX)	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _P	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH SVHC	COMPLIANT
RoHS	COMPLIANT
TERMINATION FINISH	Au



Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

February 2021