


❖ ELECTRICAL SPECIFICATION



PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 6	GHz
Impedance	50	Ω
VSWR, max	1.25	-
Durability	500	cycles
Operating Temperature Range	-65 ~ +165	$^{\circ}\text{C}$
Neutral Salt Spray	48	h

❖ DIMENSIONS

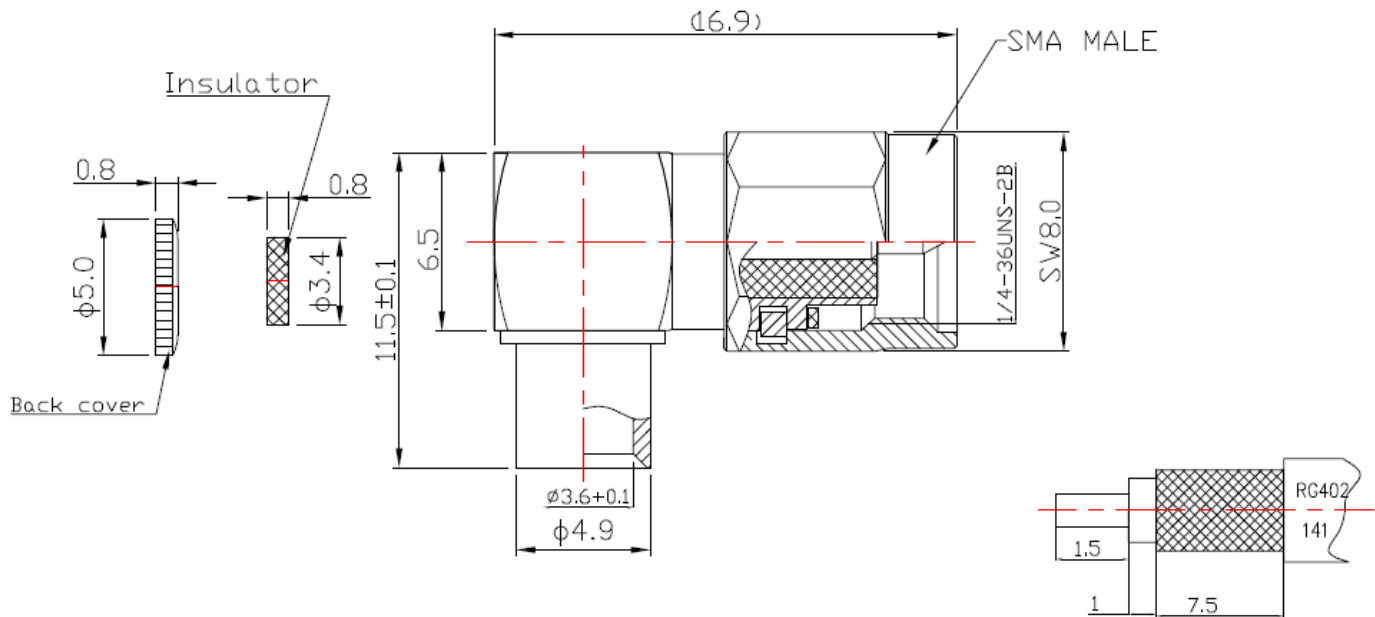

Recommended installation dimensions

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATING
CENTER CONTACT	BRASS	GOLD PLATING
BACK COVER	BRASS	GOLD PLATING
INSULATOR	PTFE	-

					 A RAMI TECHNOLOGY Company
Rev	Change	Date	Name		
Projection		Scale	Date	Name	
 Dimensions in mm		--	Drawn	03.29.2024	
			Checked	03.29.2024	CP
			Approved	03.29.2024	CP
Description					SMA RIGHT ANGLE MALE CONNECTOR FOR 141/RG402 CABLE
Part Number					
					A