




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 6	GHz
Impedance	50	Ω
VSWR, max	1.25	-
Durability	500	cycles
Operating Temperature Range	-65 ~ +165	$^{\circ}\text{C}$
Neutral Salt Spray	48	h

❖ DIMENSIONS

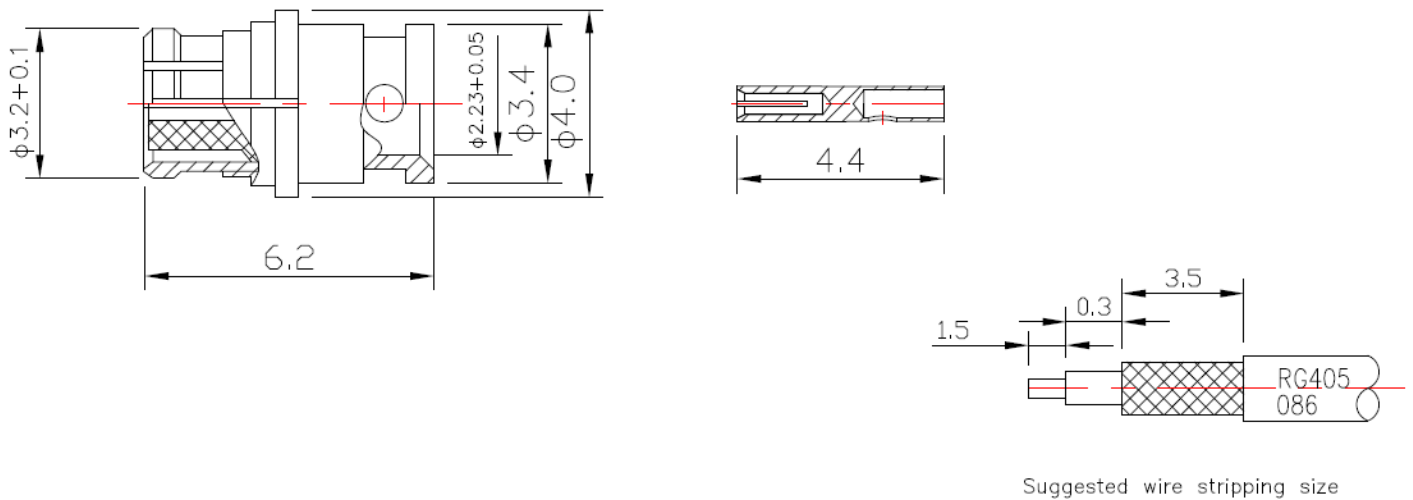

DESCRIPTION	MATERIAL	FINISH
BODY	BERYLLIUM BRONZE	GOLD
CENTER CONTACT	BERYLLIUM BRONZE	GOLD
INSULATOR	PTFE	-

				 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description SMP FEMALE CONNECTOR FOR RG405/086 CABLE Part Number RCN-33F-KB2062-LH-001	
Projection		Date	Name		
Scale		Date	Name		
 Dimensions in mm		--		Drawn 03.29.2024 AR	A
				Checked 03.29.2024 CP	
				Approved 03.29.2024 CP	