




## ❖ ELECTRICAL SPECIFICATION

PARAMETER		VALUE	UNIT
Frequency Range		0 – 6	GHz
Impedance		50	$\Omega$
Working Voltage, max		335	Vrms
Dialectic Withstanding Voltage, max		1000	Vrms
Insertion Loss	1 GHz	0.1	dB
VSWR, max		1.17	-

## ❖ DIMENSIONS

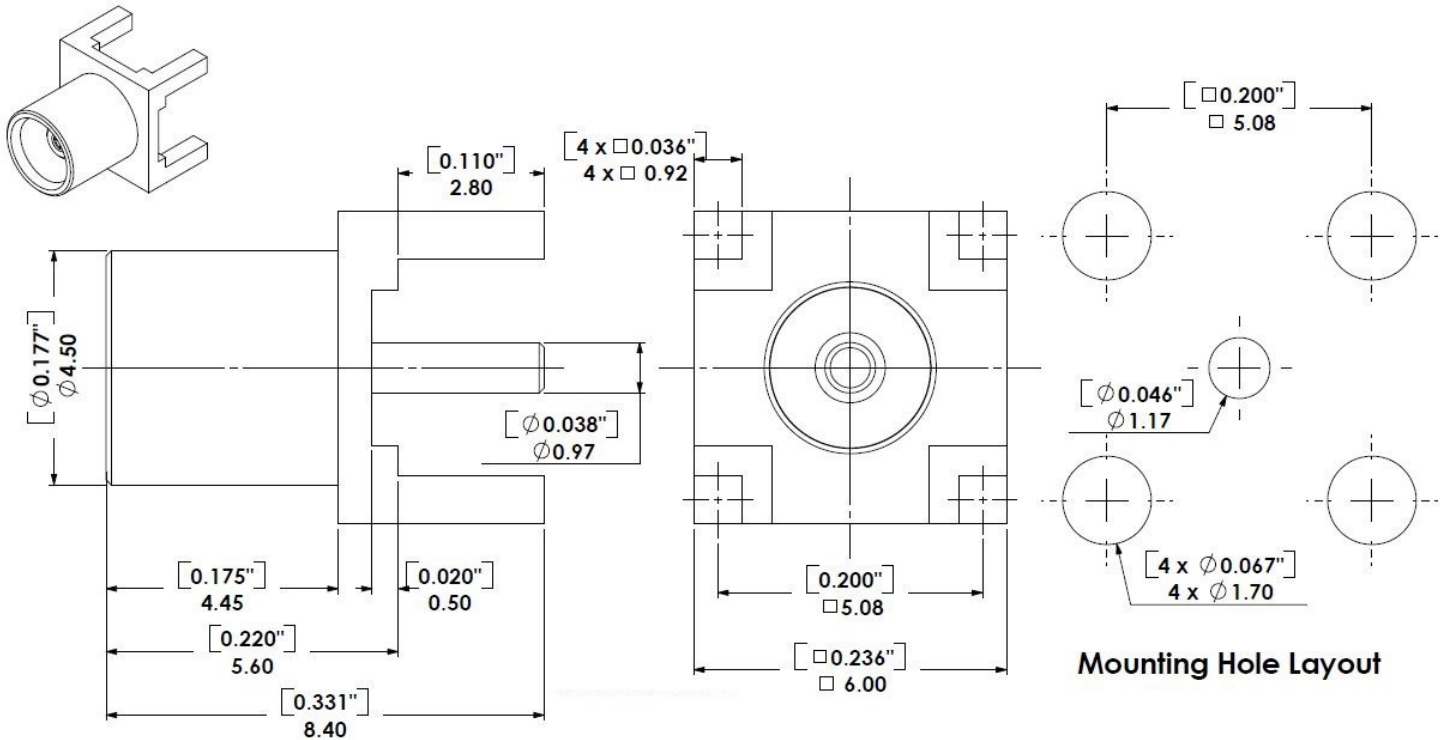

Description	Material	Finished
Body	Brass	Gold
Insulator	Teflon	None
Contact	BE.Copper	Gold 30U"

				 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description	
				<b>MCX STRAIGHT JACK FOR PCB RECEPTACLE</b>	
Projection	Scale	Date	Name	Part Number	
	--	Drawn	09.10.2018	AR	<b>RCN-4F-28012-K-001</b>
		Checked	09.10.2018	CP	
		Approved	09.10.2018	CP	
Dimensions in mm					<b>A</b>