




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 3	GHz
Impedance	75	Ω
VSWR, max	1.35	-
Durability	500	cycles
Operating Temperature Range	-65 ~ +165	°C
Neutral Salt Spray	48	h

❖ DIMENSIONS

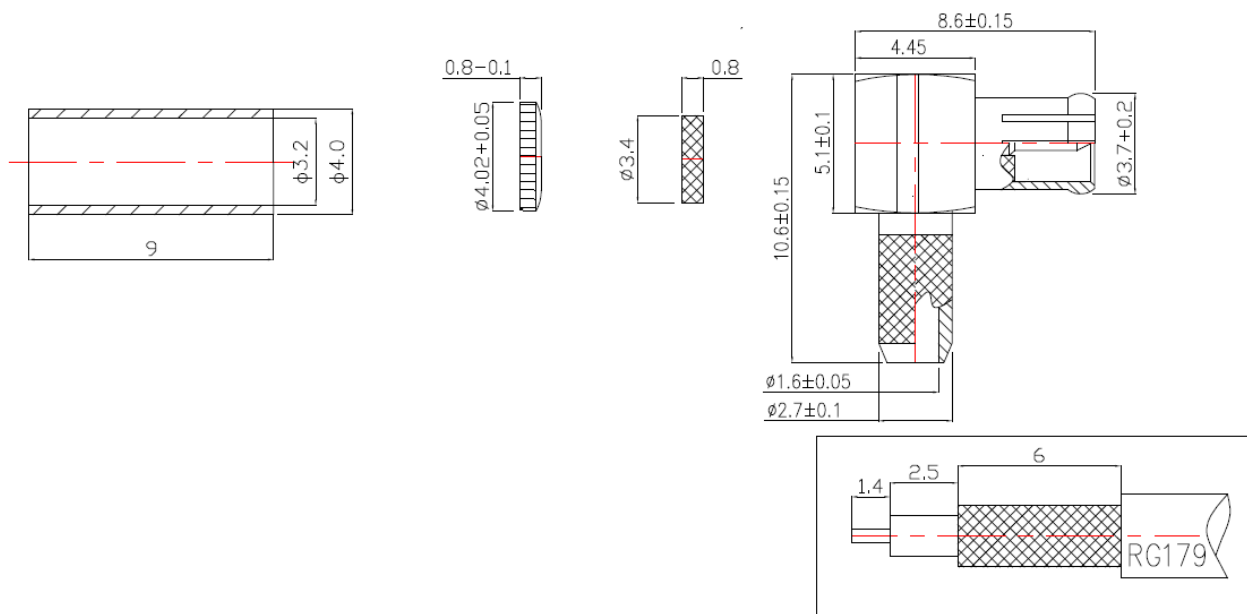

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATING
CONTACT	PHOSPHOR COPPER	GOLD PLATING
CENTER CONTACT	BRASS	GOLD PLATING
COPPER TUBE	BRASS	NICKEL PLATING
INSULATOR	PTFE	-

				 A RAMI TECHNOLOGY Company		
Rev	Change	Date	Name	Description <b>MCX MALE RIGHT ANGLE CONNECTOR FOR RG316 CABLE</b>		
Projection		Scale	Date	Name	Part Number <b>RCN-4M-7515106-LH-001</b>	
		--	Drawn	03.26.2024		AR
			Checked	03.26.2024		CP
Dimensions in mm		Approved	03.26.2024	CP	A	