




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 6	GHz
Impedance	50	Ω
VSWR, max	1.2	-
Center Contact Resistance , max	3	m Ω
Outer Contact Resistance, max	2	m Ω
Dielectric Strength	500	Vrms
Durability	500	cycles
Operating Temperature Range	-65 ~ +165	$^{\circ}$ C
Neutral Salt Spray	48	h

❖ DIMENSIONS

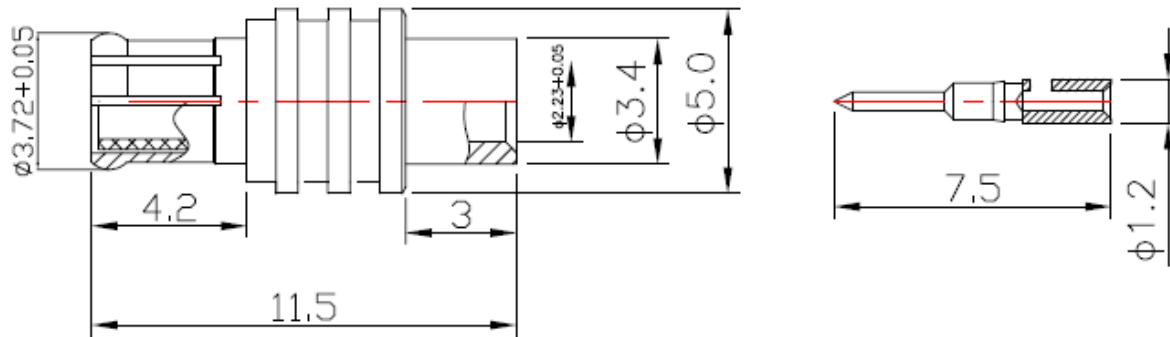

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATING
CONTACT PARTS	PHOSPHOR COPPER	GOLD PLATING
CENTER CONTACT	BRASS	GOLD PLATING
INSULATOR	PTFE	-

					 A RAMI TECHNOLOGY Company
Rev	Change	Date	Name		
Projection	Scale	Date	Name	Description	
	--	Drawn	03.26.2024	AR	
Dimensions in mm					Description
					MCX MALE CONNECTOR FOR RG405/086 CABLE
					Part Number
					RCN-4M-JB2115-LH-001
					A