




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	DC ~ 6	GHz
Impedance	50	Ω
VSWR, max	1.25	-
Durability	500	cycles
Operating Temperature Range	-65 ~ +165	$^{\circ}\text{C}$

❖ DIMENSIONS

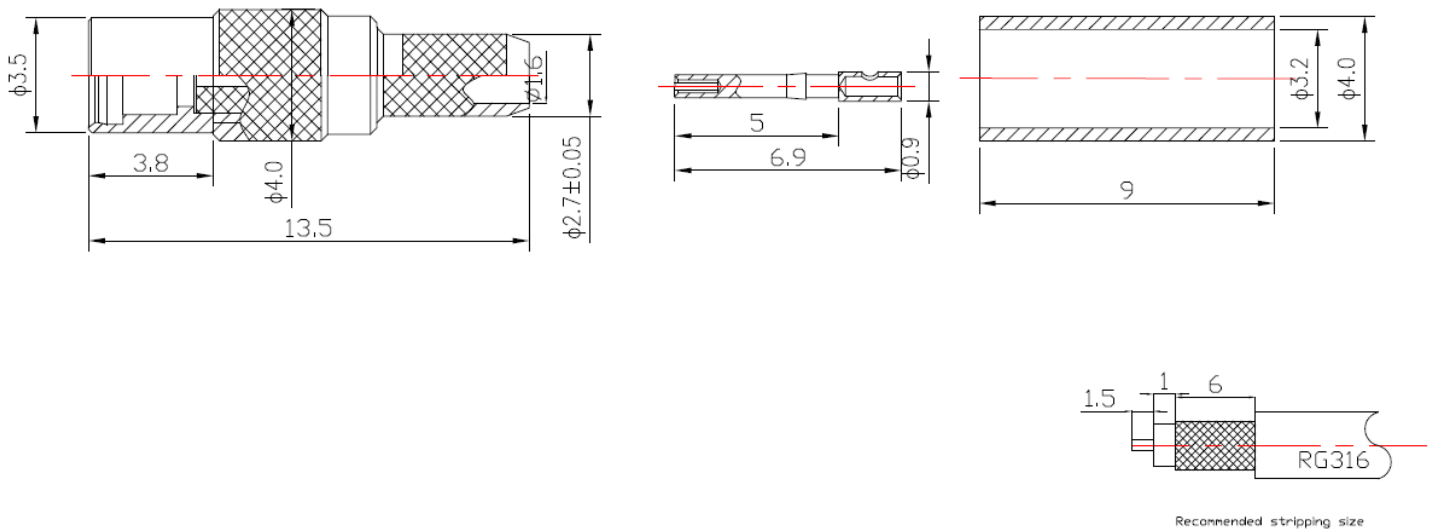

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD
CENTER CONTACT	PHOSPHOR BRONZE	GOLD
INSULATOR	PTFE	-

					 A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description		
				MMCX FEMALE CONNECTOR FOR RG316 CABLE		
Projection		Scale	Date	Name	Part Number	
		--	Drawn	03.26.2024	AR	
			Checked	03.26.2024	CP	
			Approved	03.26.2024	CP	
Dimensions in mm					RCN-5F-K15135-LH-001	A