


FEATURES

- TIGHT TOLERANCE AND STABILITY OVER TEMPERATURE
- WIDE FREQUENCY RANGE
- EXCELLENT FREQUENCY SOURCE FOR TELECOM APPLICATIONS


SPECIFICATIONS

FREQUENCY RANGE		1.00 MHz TO 360.00 MHz
HOLDER TYPES	A-SMD: HC-49/U-SMD	1.00 MHz TO 360.00 MHz
	C-SMD: UM-1 SMD	8.00 MHz TO 200.00 MHz
FREQUENCY TOLERANCE AT 25° C		±5 PPM TO ±25 PPM
FREQUENCY STABILITY OVER TEMPERATURE RANGE		±3PPM TO ±10PPM(-10°C TO +60°C) ±15 TO ±50 PPM (-40°C TO +85°C)
EXTENDED TEMPERATURE RANGE		-40°C TO +85°C MAXIMUM
LOAD CAPACITANCE		10 pF TO 32 pF OR SERIES
AGING PER YEAR		±3 PPM MAXIMUM
MODE OF OSCILLATION (SEE PAGE 2)		FUNDAMENTAL TO NINTH OVERTONE
EQUIVALENT SERIES RESISTANCE (ESR)		SEE PAGE 2
DRIVE LEVEL		0.1 mW TYPICAL

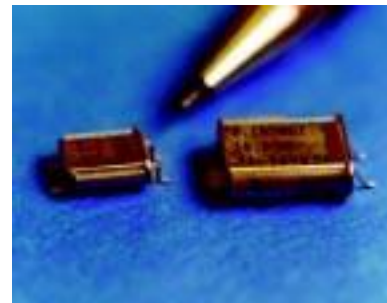


OUTLINE DRAWINGS

A-SMD TYPE: HC-49/U-SMD

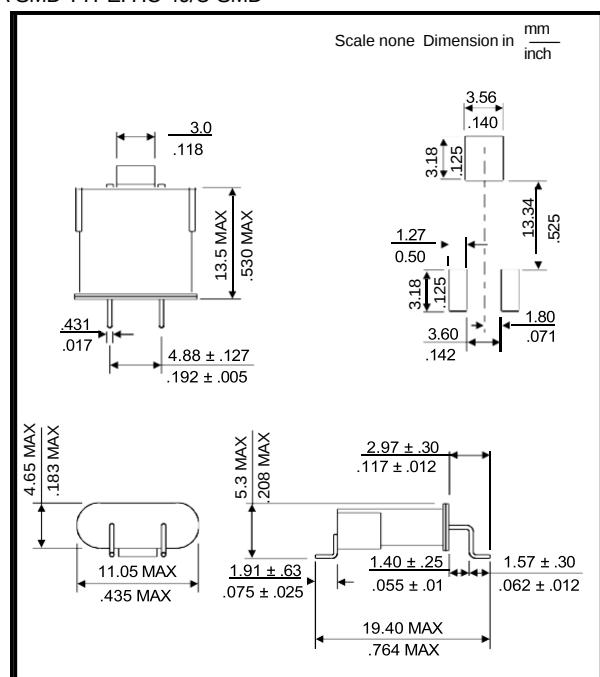

C-SMD TYPE: UM-1-SMD

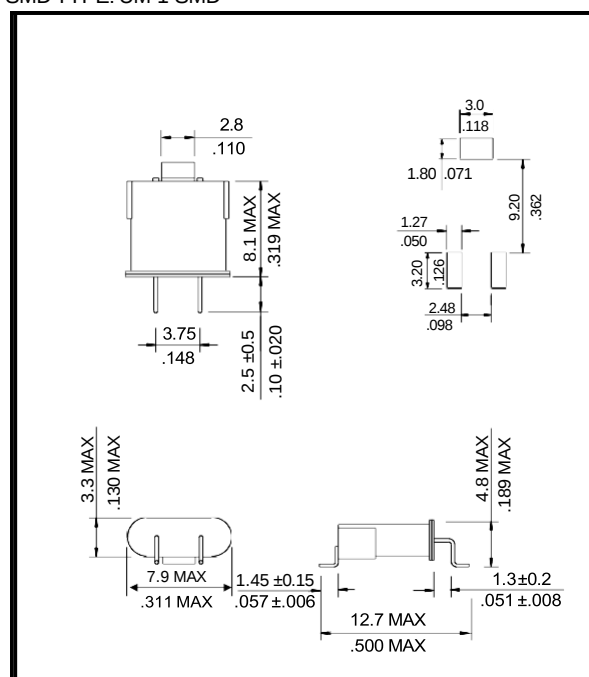

PART NUMBERING SYSTEM

HOLDER TYPE		FREQUENCY	LOAD CAPACITANCE	MODE	TOLERANCE/ STABILITY	EXTENDED TEMPERATURE	SURFACE MOUNT
A	C						
A	HC-49/U-SMD	IN MHz	10 TO 32pF FOR PARALLEL S FOR SERIES	F 3OT 5OT 7OT 9OT	FUNDAMENTAL THIRD OVERTONE FIFTH OVERTONE SEVENTH OVERTONE NINTH OVERTONE	EX. 1010, 1530 (PPM / PPM)	SMD

EXAMPLE: A-32.000-20-3OT-SMD
C-100.00-S-5OT-SMD

EQUIVALENT SERIES RESISTANCE VERSUS FREQUENCY AND PACKAGE

FREQUENCY MHz	HOLDER TYPE		ESR		
	HC-49/U "A"	UM-1 "C"	"	"A"	"C"
1.000	A			700	
1.843	A			700	
2.000	A			500	
2.097152	A			500	
2.4576	A			400	
3.000	A			200	
3.2768	A			180	
3.579545	A			180	
3.600	A			160	
3.6864	A			140	
4.000	A			80	
4.096	A			80	
4.194304	A			80	
4.433619	A			80	
4.9152	A			60	
5.000	A			60	
5.0688	A			60	
5.185	A			60	
5.7143	A			50	
5.9904	A			50	
6.000	A			50	
6.144	A			40	
6.400	A			40	
6.5536	A			40	
7.000	A			30	
7.15909	A			30	
7.3728	A			30	
8.000	A	C		30	
9.216	A	C		30	
9.8304	A	C		30	
10.000	A	C		25	50
10.738635	A	C		25	50
11.000	A	C		25	50
11.050	A	C		25	50

FREQUENCY MHz	HOLDER TYPE		ESR		
	HC-49/U "A"	UM-1 "C"	"	"A"	"C"
11.059	A	C		25	50
12.000	A	C		25	40
12.288	A	C		25	40
13.5168	A	C		25	40
14.31818	A	C		25	35
14.7456	A	C		25	35
15.000	A	C		25	35
16.000	A	C		25	30
16.384	A	C		25	35
17.360	A	C		25	30
18.000	A	C		20	25
18.432	A	C		20	30
19.354	A	C		20	30
19.6608	A	C		20	30
20.000	A	C		20	30
22.1184	A	C		20	25
23.400	A	C		20	25
24.000	A	C		20	25
24.576	A	C		30	25
25.000	A	C		30	20
27.000	A	C		30	20
30.000	A	C		30	20
32.000	A	C		30	60
36.000	A	C		30	60
40.000	A	C		30	50
48.000	A	C		30	50
60.000	A	C		30	40
70.000	A	C		30	40
80.000	A	C		30	40
90.000	A	C		40	40
100.000	A	C		40	100
150.000	A	C		50	70
200.000	A	C		100	120
300.000	A			150	

FREQUENCY RANGE AND MODE OF OSCILLATION BY HOLDER TYPE

HOLDER TYPE	FUNDAMENTAL (FUND)	THIRD OVERTONE (3OT)	FIFTH OVERTONE (5OT)	SEVENTH OVERTONE (7OT)	NINTH OVERTONE (9OT)
TYPE A: HC-49/U	1.00 MHz TO 65.00 MHz	20.00 MHz TO 90.00 MHz	60.00 MHz TO 130.00 MHz	125.00 MHz TO 200.00 MHz	180.00 MHz TO 300.00 MHz
TYPE C: UM-1	8.00 MHz TO 65.00 MHz	25.00 MHz TO 90.00 MHz	60.00 MHz TO 130.00 MHz	125.00 MHz TO 200.00 MHz	

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.