

Page 1 of 3

RH100-18.432-18-2030-EXT-TR

• SPECIFICATIONS

| PARAMETER | VALUE |
|--------------------------------------|---------------------|
| NOMINAL FREQUENCY | 18.432 MHz |
| MODE OF OSCILLATION | Fundamental |
| FREQUENCY TOLERANCE AT 25°C | ±20 ppm max |
| FREQUENCY STABILITY OVER TEMPERATURE | ±30 ppm max |
| OPERATING TEMPERATURE RANGE | -40°C to +85°C |
| STORAGE TEMPERATURE RANGE | -40°C to +85°C |
| AGING | ±2 ppm per year max |
| LOAD CAPACITANCE | 18 pF |
| EQUIVALENT SERIES RESISTANCE | 70 Ω max |
| SHUNT CAPACITANCE | 3.5 pF max |
| DRIVE LEVEL | 200 µW max |




Photo is not actual part

MECHANICAL SPECIFICATION TOP VIEW TOP VIEW PIN CONNECTION 3.2±0.2 [0 126+0 008] GND 4 3 2.5±0.2 MARKING AREA O. 2 GND 2 0.7±0.1 [0.028±0.004] SIDE VIEW SOLDERING PATTERN 4x1.4 [0.055] 0.043 BOTTOM VIEW 4x1. [0.063] 1.2 9 [0.047] 0.7 2.2 [0.087] 4X1.0 4X0.9 [0.035] [0.040] Scale none - Dimensions in mm

Notes:

 Pins 2 and 4 are connected-together and to the metal cover for Case GND.
According to ceramic base availability the Chamfer location could be on a different pin. However, the Chamfer's location does not influence the electrical performance of the crystal.

CARRIER TAPE DIMENSIONS

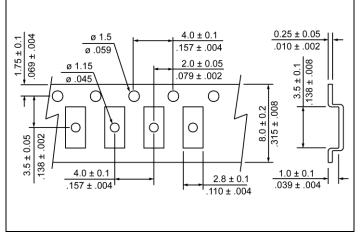

NOTE: REFER TO EIA-481 FOR DIMENSIONS

PACKAGING

178 mm REEL DIAMETER 8 mm TAPE WIDTH, 4 mm PITCH QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481




SURFACE MOUNT MICROPROCESSOR CRYSTAL

RH100-18.432-18-2030-EXT-TR

Page 2 of 3

• REFLOW PROFILE

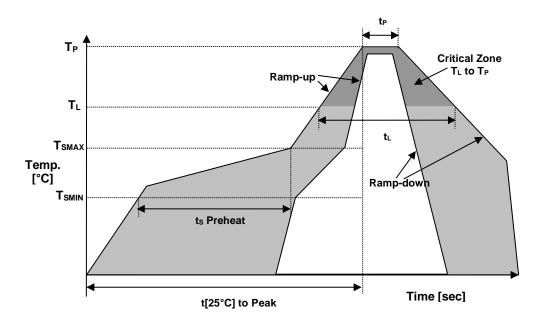

| Reflow profile | | | | |
|--|-------------------|-------------|--|--|
| Temperature Min Preheat | T _{SMIN} | 125°C | | |
| Temperature Max Preheat | T _{SMAX} | 150°C | | |
| Time (T _{SMIN} to T _{SMAX}) | ts | 60-180 sec | | |
| Temperature | TL | 217°C | | |
| Peak Temperature | T _P | 260°C | | |
| Ramp-up rate | RUP | 3°C/sec max | | |
| Ramp-down rate | RDOWN | 6°C/sec max | | |
| Time within 5°C of Peak Temperature | tP | 10 sec | | |
| Time t[25°C] to Peak Temperature | t[25°C] to Peak | 480 sec | | |
| Time | tL | 60-150 sec | | |

ENVIRONMENTAL

| PARAMETER | VALUE |
|----------------------------|-----------|
| MOISTURE SENSITIVITY LEVEL | 1 |
| RoHS | Compliant |
| REACH SVHC | Compliant |
| HALOGEN-FREE | Compliant |
| ESD CLASSIFICATION LEVEL | N/A |
| TERMINATION FINISH | Au |





SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 3 of 3

RH100-18.432-18-2030-EXT-TR

MARKING

R18.432 xxBDyw

- x Internal Production ID code
- y Year code
- w-Week code

| YEAR CODE | | |
|-----------|------|--|
| Year | Code | |
| 2019 | 9 | |
| 2020 | 0 | |
| 2021 | 1 | |
| 2022 | 2 | |
| 2023 | 3 | |
| 2024 | 4 | |
| 2025 | 5 | |
| 2026 | 6 | |
| 2027 | 7 | |
| 2029 | 8 | |
| 2029 | 9 | |

| ALPHA WEEK CODE TABLE | | | | | |
|-----------------------|------|------|------|------|------|
| Week | Code | Week | Code | Week | Code |
| 1 | а | 19 | 8 | 37 | K |
| 2 | b | 20 | t | 38 | L |
| 3 | с | 21 | u | 39 | М |
| 4 | d | 22 | v | 40 | Ν |
| 5 | е | 23 | w | 41 | 0 |
| 6 | f | 24 | х | 42 | Р |
| 7 | g | 25 | У | 43 | Q |
| 8 | h | 26 | z | 44 | R |
| 9 | i | 27 | А | 45 | S |
| 10 | j | 28 | В | 46 | Т |
| 11 | k | 29 | С | 47 | U |
| 12 | 1 | 30 | D | 48 | V |
| 13 | m | 31 | Е | 49 | W |
| 14 | n | 32 | F | 50 | Х |
| 15 | 0 | 33 | G | 51 | Y |
| 16 | р | 34 | Н | 52 | Z |
| 17 | q | 35 | I | | |
| 18 | r | 36 | J | | |

APPROVAL

| DRAWN BY | JH, January 31, 2019 |
|-------------|-----------------------------------|
| APPROVED BY | CP, January 31, 2019 |
| REVISION | A, Initial Release |
| | B, Updated to current spec levels |
| | by XS, February 17, 2021 |

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time withhout notice. Raltron/RAMI Tech does not guarantee that the of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, hamless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.