

### FEATURES

- HIGH FREQUENCY AT CUT CRYSTAL PERFORMANCE
- SMALL COMPACT SIZE
- EXCELLENT SHOCK AND VIBRATION CHARACTERISTICS

### SPECIFICATIONS

SERIES	CSA310	CSA309
FREQUENCY RANGE	3.579545 MHz TO 4.00 MHz	4.00 MHz TO 30.00 MHz (FUND) 30.01 MHz TO 70.00 MHz (3 OT)
MODE OF OSCILLATION	FUNDAMENTAL OR THIRD OVERTONE	
FREQUENCY TOLERANCE AT 25°C	±50 PPM MAXIMUM	
FREQUENCY STABILITY VERSUS TEMPERATURE	±50 PPM MAXIMUM	
OPERATING TEMPERATURE RANGE	-10°C TO +60°C STANDARD -40°C TO +85°C EXTENDED	
STORAGE TEMPERATURE RANGE	-40°C TO +85°C	
AGING (FIRST YEAR)	±5 PPM	
LOAD CAPACITANCE	12 pF TO 32 pF OR SERIES	
SHUNT CAPACITANCE	5.0 pF MAXIMUM	
EQUIVALENT SERIES RESISTANCE (ESR)	SEE TABLE	
DRIVE LEVEL	50 µW TYPICAL 100 µW MAXIMUM	50 µW TYPICAL 100 µW MAXIMUM
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ONTO A WOOD SURFACE	




### EQUIVALENT SERIES RESISTANCE (ESR) VS. FREQUENCY RANGE

MODEL TYPE	FREQUENCY (MHZ)	MAXIMUM ESR (OHM)	MODE OF OSCILLATION
CSA310	3.579545 TO 4.00	200	FUNDAMENTAL
CSA309	4.00 TO 5.999	150	FUNDAMENTAL
	6.00 TO 9.999	100	FUNDAMENTAL
	10.00 TO 30.00	50	FUNDAMENTAL
	30.01 TO 35.99	100	THIRD OVERTONE
	36.00 TO 70.00	80	THIRD OVERTONE

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.


### OUTLINE DRAWING

CSA310

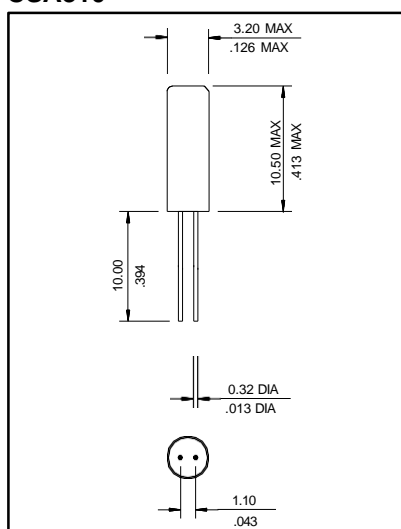

Scale none Dimension in  $\frac{\text{mm}}{\text{inch}}$

CSA309

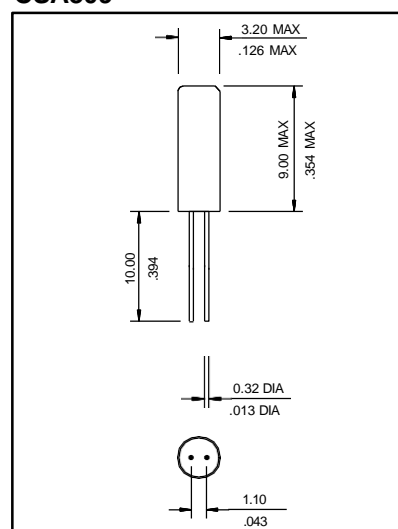

### PART NUMBERING SYSTEM

HOLDER	FREQUENCY	LOAD CAPACITANCE	MODE	TOLERANCE/STABILITY (PPMPPM)	EXTENDED TEMPERATURE
CSA309 CSA310	IN MHz	12 TO 32 pF FOR PARALLELS FOR SERIES	BLANK FOR < 24.576 MHz F FOR ≥ 24.576 MHz 3OT THIRD OVERTONE	BLANK FOR MAXIMUM PPMPPM FOR OTHER EXAMPLE 3050, 2050	BLANK FOR STANDARD EXT FOR EXTENDED

EXAMPLE: CSA309-11.0592-18  
CSA309-32.000-20-3OT