

H130B-8.000-18-3030-TR-NS1


● SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	8.000 MHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C	±30 ppm maximum
FREQUENCY STABILITY OVER TEMPERATURE	±30 ppm maximum
OPERATING TEMPERATURE RANGE	-20°C to +70°C
STORAGE TEMPERATURE RANGE	-40°C to +85°C
AGING	±2 ppm per year max
LOAD CAPACITANCE	18 pF
EQUIVALENT SERIES RESISTANCE	100 Ω max
SHUNT CAPACITANCE	5 pF max
DRIVE LEVEL	100 μW typ, 200 μW max ⇄




Photo is not actual part

● MECHANICAL SPECIFICATION

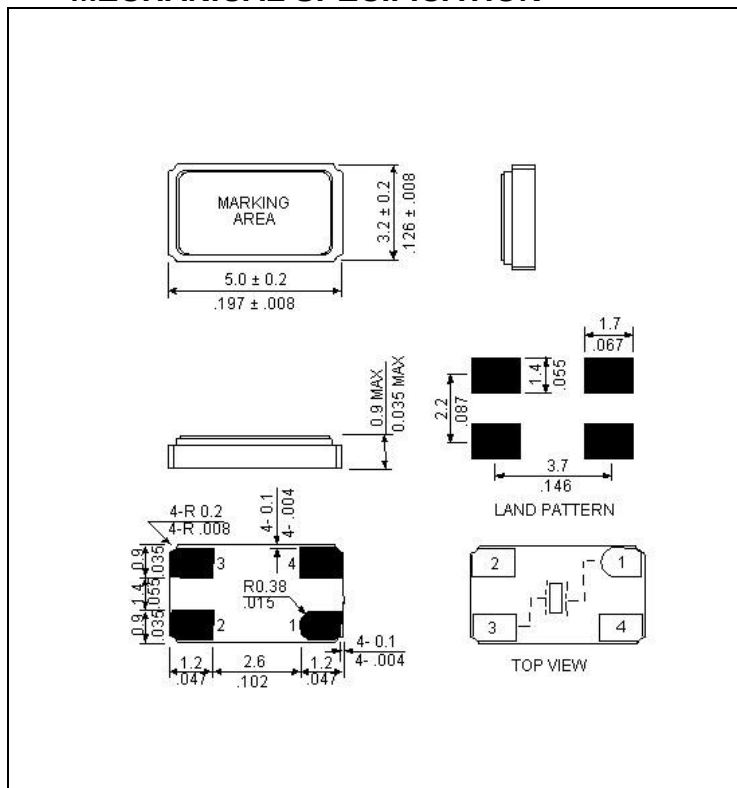

● CARRIER TAPE DIMENSIONS

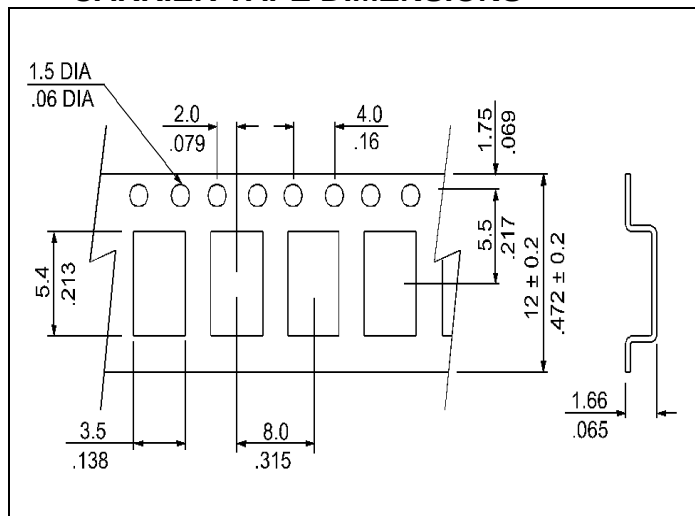


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● PACKAGING

178 mm REEL DIAMETER
8 mm TAPE WIDTH, 4 mm PITCH
QUANTITY: 3000 PIECES PER REEL
IN ACCORDANCE WITH EIA-481

REFLOW PROFILE

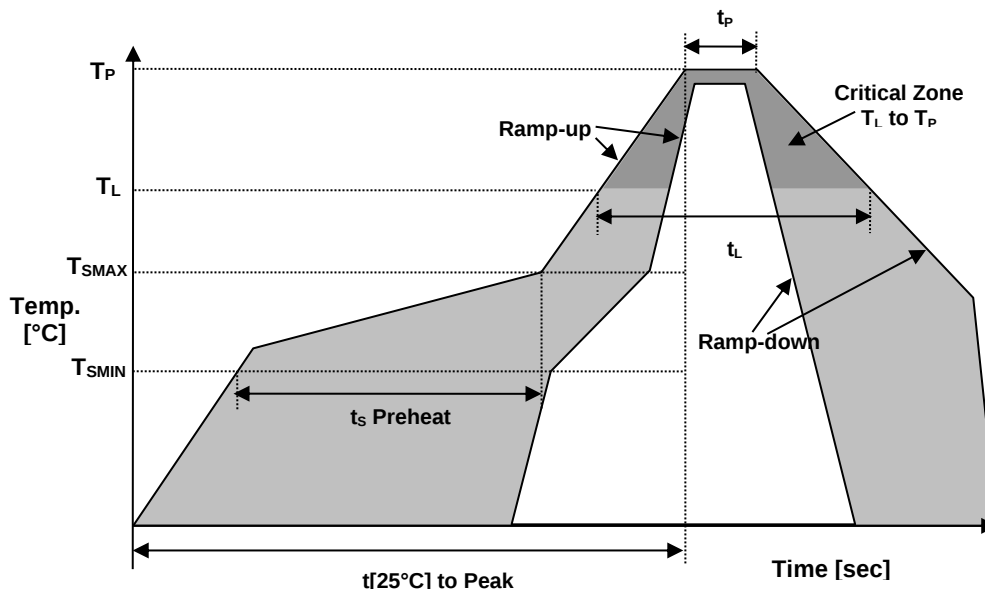

Reflow profile		
Temperature Min Preheat	T _{SMIN}	125°C
Temperature Max Preheat	T _{SMAX}	150°C
Time (T _{SMIN} to T _{SMAX})	t _s	30-60 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _p	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	120 sec.
Time	t _L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	COMPLIANT
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au





A **RAMI TECHNOLOGY** Company

SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 3 of 4

H130B-8.000-18-3030-TR-NS1

● MARKING

R08.00

xxBFyw

x – Internal Production ID code

y – Year code

w – Week code

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9

ALPHA WEEK CODE TABLE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

● APPROVAL

RALTRON	
DRAWN BY:	KJackson, Sept. 24, 2015
APPROVED BY:	KJackson, Sept. 24, 2015
REVISION:	A, Initial Release
	B, Updated the Current Revision Levels AR, June 03, 2020

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate.

RALTRON ELECTRONICS ■ 10400 N.W. 33rd STREET ■ Miami, Florida 33172 ■ U.S.A.
Telephone: +1-305-593-6033 ■ Fax: +1-305-594-3973 ■ e-mail: sales@raltron.com ■ web site: <http://www.raltron.com>



A **RAMI TECHNOLOGY** Company

SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 4 of 4

H130B-8.000-18-3030-TR-NS1

reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.