


● ELECTRICAL SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
FREQUENCY TOLERANCE AT 25°C, Max	±5 PPM
TURNOVER TEMPERATURE	25°C ± 5°C
PARABOLIC CURVATURE CONSTANT	-0.034 PPM/Δ°C ²
LOAD CAPACITANCE	12.5 pF
EQUIVALENT SERIES RESISTANCE, Max	35k Ω
DRIVE LEVEL, Max	1.0 μW
MOTIONAL CAPACITANCE, Typical	0.003 pF
SHUNT CAPACITANCE, Typical	1.35 pF
CAPACITANCE RATIO	450
AGING (FIRST YEAR)	±3 PPM
QUALITY FACTOR, Typical	70000
INSULATION RESISTANCE, minimum	500M Ω
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-40°C to +85°C
SHOCK RESISTANCE	±5ppm max 75 cm drop test in 3 axes onto a hard surface or 3000gx0.3msx1/2 sinewave in 3 axes




Photo is not actual part

● MECHANICAL SPECIFICATIONS

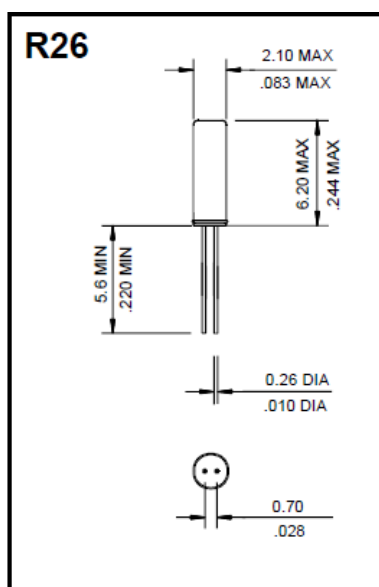

NOTE: Solder by terminals only max 245°C for ten seconds

REFLOW PROFILE

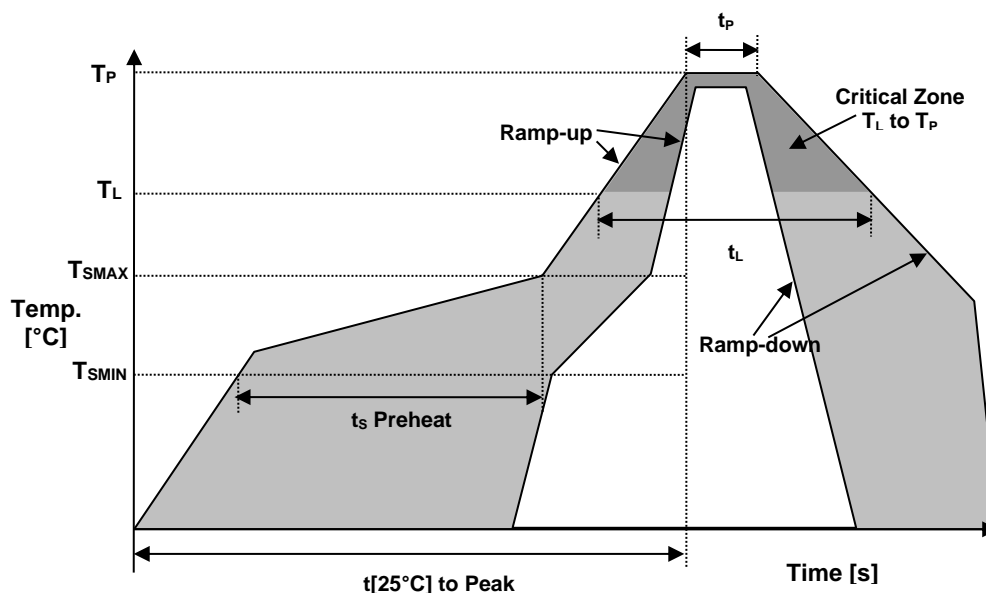

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/s max.
Ramp-down rate	R_{DOWN}	6°C/s max.
Time within 5°C of Peak Temperature	t_p	10 s
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 s
Time	t_L	60-150 s

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS-2	5/6 COMPLIANT, EXEMPTION 7a
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Sn





A **RAMI TECHNOLOGY** Company

TUNING FORK CRYSTAL

Page 3 of 3

R26-32.768-12.5-EXT-5PPM

• MARKING

x3FmyR

x – Internal Production ID code

m – Month code

y – Year code

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9

MONTH CODE	
MONTH	CODE
JANUARY	A
FEBRUARY	B
MARCH	C
APRIL	D
MAY	E
JUNE	F
JULY	G
AUGUST	H
SEPTEMBER	J
OCTOBER	K
NOVEMBER	L
DECEMBER	M

• APPROVAL

DRAWN BY:	KJackson, June 20, 2016
APPROVED BY:	KJackson, June 20, 2016
REVISION:	A, Revised Format

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

RALTRON ELECTRONICS ■ 10400 N.W. 33rd STREET ■ Miami, Florida 33172 ■ U.S.A.
Telephone: +1-305-593-6033 ■ Fax: +1-305-594-3973 ■ e-mail: sales@raltron.com ■ web site: <http://www.raltron.com>