

- **FEATURES**
 - SUITABLE FOR TIME OF DAY CLOCKS
 - COMPACT PACKAGE
 - IDEAL FOR PICK AND PLACE ASSEMBLY

● **SPECIFICATIONS**

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
FREQUENCY TOLERANCE AT 25°C	±20 ppm max
TURNOVER TEMPERATURE	+25°C ±5°C
PARABOLIC CURVATURE CONSTANT	(-0.034 ±0.006) ppm/°C ²
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C
AGING (FIRST YEAR)	±3 ppm max
LOAD CAPACITANCE	6, 7, 8, 9, 12.5 pF
EQUIVALENT SERIES RESISTANCE	50 kΩ max
SHUNT CAPACITANCE	1.35 pF typ, 2 pF max
MOTIONAL CAPACITANCE	0.003 pF typ
CAPACITANCE RATIO	450 typ
DRIVE LEVEL	1 μW max
INSULATION RESISTANCE	500 MΩ min
SHOCK RESISTANCE	±5 ppm max 75 cm drop test onto a hard surface or 3000 g x 0.3 ms x ½ sinewave in 3 axes
REFLOW CONDITIONS	260°C for 10 s max



■ **PART NUMBERING SYSTEM**


TYPE	-	FREQUENCY (kHz)	-	LOAD CAPACITANCE (pF)	-	TAPE & REEL
RSM200S	-	32.768	-	6 to 12.5	-	TR

EXAMPLE: RSM200S-32.768-12.5-TR


Surface Mount Tuning Fork Crystal, 8.0 x 3.8 mm, 32.768 kHz, 12.5 pF Load, ±20 ppm Tolerance, Operating Temperature Range from -40°C to +85°C, Tape and Reel Packaging

SERIES RSM200S


MECHANICAL SPECIFICATION

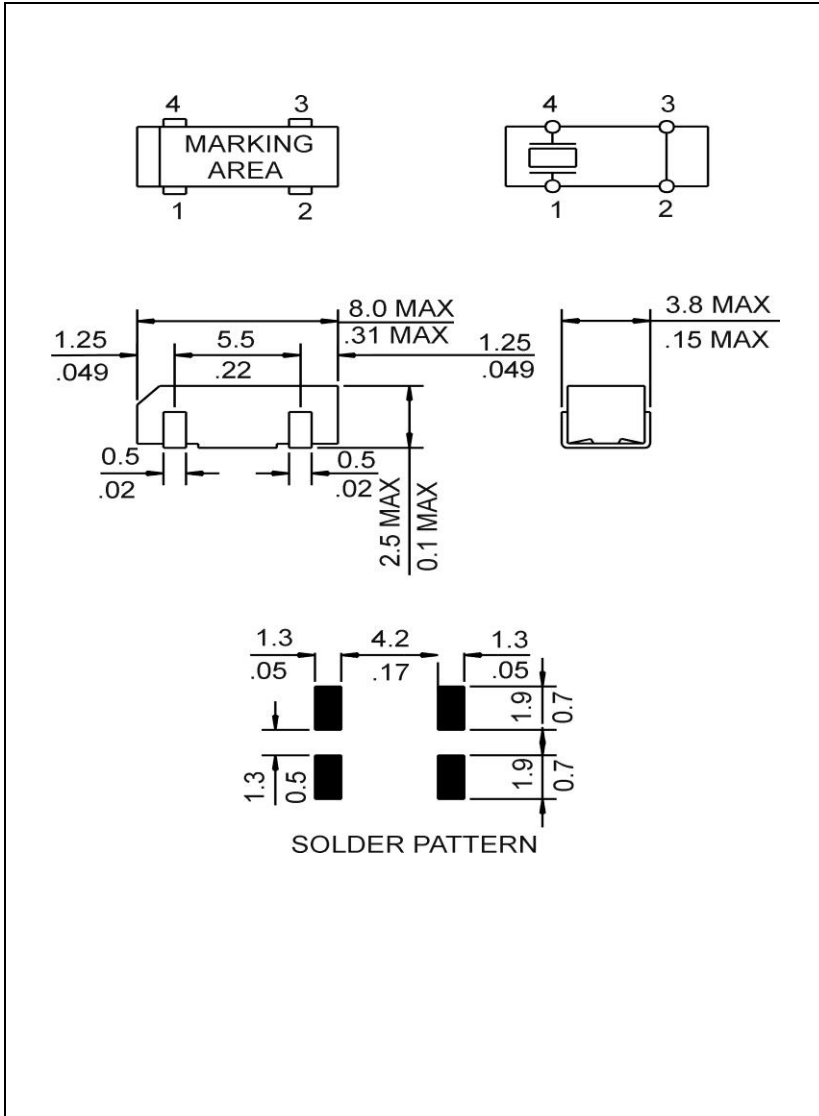

FREQUENCY vs. TEMPERATURE CURVE

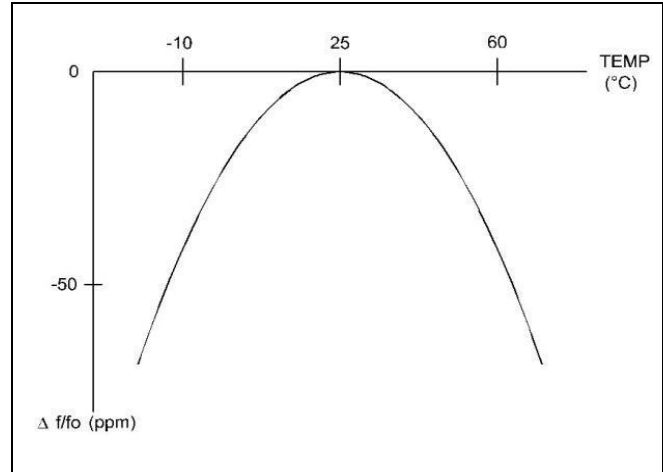


CARRIER TAPE DIMENSIONS

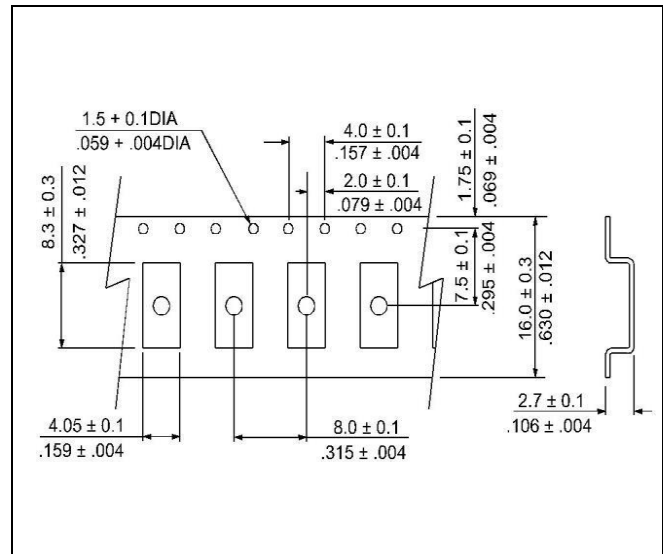

PACKAGING

Reel Diameter: 330mm
Tape Width: 16 mm, Pitch: 8 mm
Quantity: 3000 pcs/reel

REFLOW PROFILE

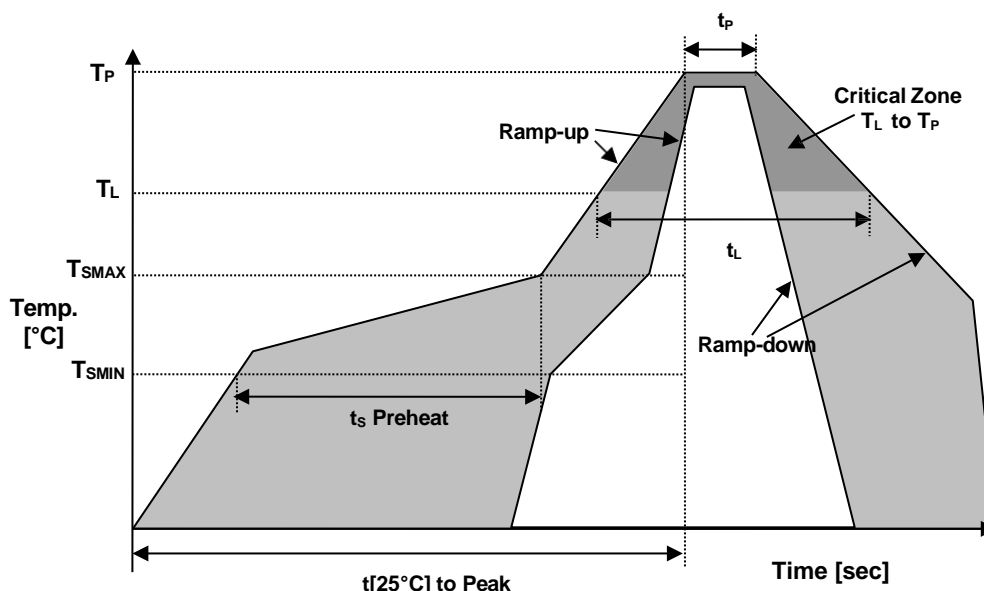

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 s
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/s max.
Ramp-down rate	R_{DOWN}	6°C/s max.
Time within 5°C of Peak Temperature	t_p	10 s
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 s
Time	t_L	60-150 s

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Exemption 7A
HALOGEN-FREE	Compliant
TERMINATION FINISH	SnAg Plating
UNIT WEIGHT	0.14 g



May 2017

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.