

RT3215-32.768-6-TR-10PPM


● SPECIFICATIONS

PARAMETER	VALUE
FREQUENCY RANGE	32.768 kHz
FREQUENCY TOLERANCE AT 25°C	±10 ppm max
TURNOVER TEMPERATURE	+25 ±5°C
TEMPERATURE COEFFICIENT	-0.04 x 10 ⁻⁶ / °C ²
SHUNT CAPACITANCE	1.1 pF typ
LOAD CAPACITANCE	6 pF
EQUIVALENT SERIES RESISTANCE	70 kΩ max
DRIVE LEVEL	0.5 μW max
AGING	±3 ppm first year max
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C




Photo is not actual part

● MECHANICAL SPECIFICATION

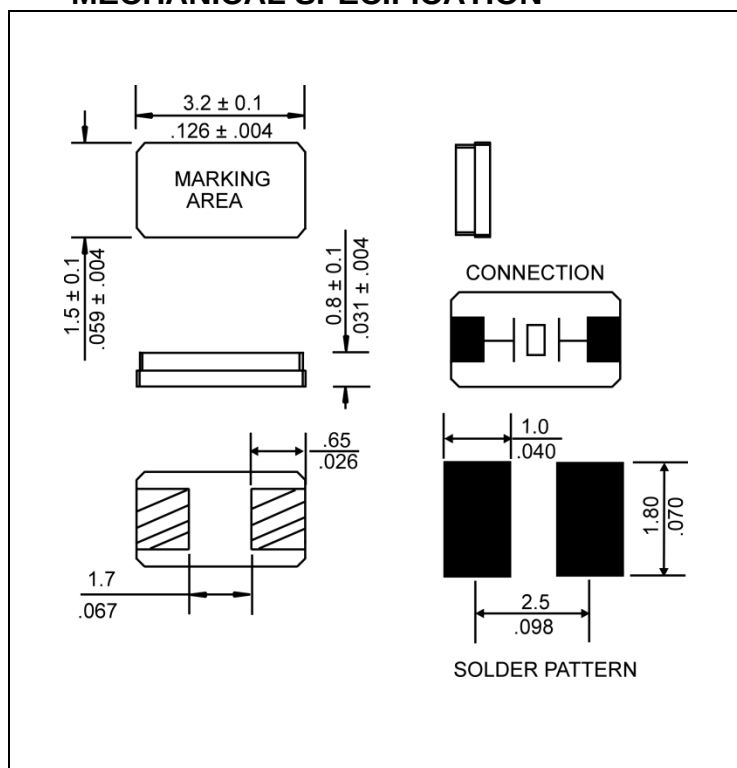

● CARRIER TAPE DIMENSIONS

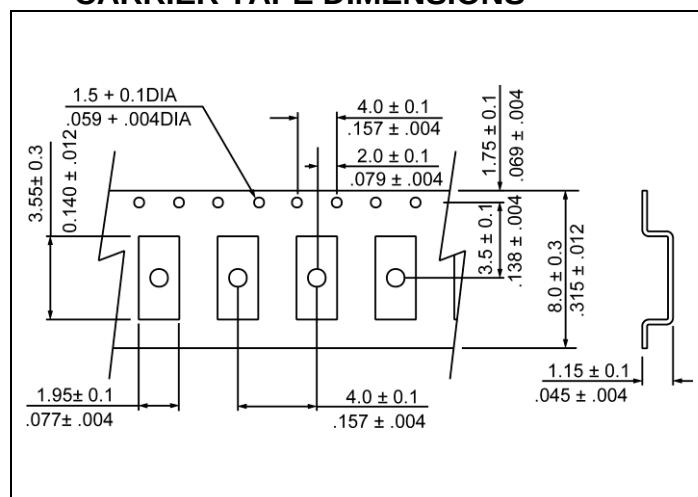


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● PACKAGING

330 mm REEL DIAMETER
 8 mm TAPE WIDTH, 4 mm PITCH
 QUANTITY: 3000 PIECES PER REEL
 IN ACCORDANCE WITH EIA-481

REFLOW PROFILE

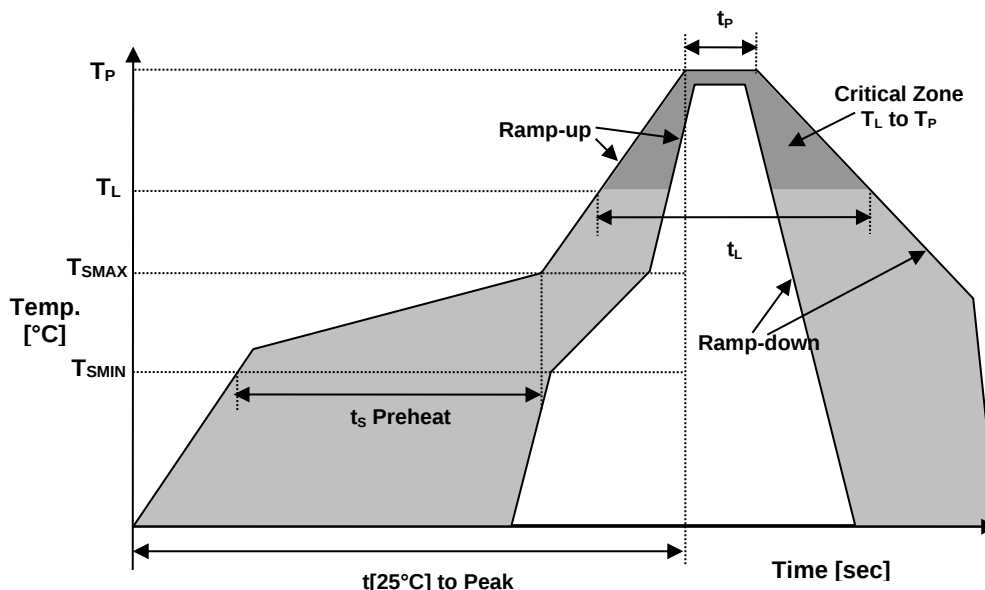

Reflow profile		
Temperature Min Preheat	T_{SMIN}	125°C
Temperature Max Preheat	T_{SMAX}	150°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}] \text{ to Peak}$	480 sec.
Time	t_L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



● MARKING

Xywwx

X – Internal Production ID code (J, R, T, Y, M, R, N)
y – Year code
ww – Week code
x – 1 or 2 digits as Lot code

ymxxx

y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
xxx – Lot code

XLzymbd

X – Internal Production ID code (J, R, T, Y, M, R, N)
L – Load capacitance code (A: 12.5pF B: 9pF C: 7pF Z: others)
z – Lot code
y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
d – Day code

XzymF_{xx}^{xx}

X – Internal Production ID code (J, R, T, Y, M, R, N)
z – Frequency code
y – Year code
m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
_{xx}^{xx} – Lot code

● APPROVAL

Drawn By:	LP, July 21, 2017
Approved By:	JL, July 21, 2017
Revision:	A, Initial Release B, CP, November 24, 2020 Updated to the current spec levels

RT3215-32.768-6-TR-10PPM

reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.