

### SERIES RT3215



#### ● FEATURES

- SUITABLE FOR TIME OF DAY CLOCKS
- IDEAL FOR HIGH DENSITY PACKAGING APPLICATION
- SMALL AND COMPACT PACKAGE
- WIDE OPERATING TEMPERATURE RANGE (-40°C to +125°C) AVAILABLE

#### ● SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C	±20 ppm Standard ±10 ppm Available
FREQUENCY STABILITY OVER TEMPERATURE COEFFICIENT	-0.04 ppm / °C <sup>2</sup>
OPERATING TEMPERATURE RANGE	-40°C to +85°C Standard
	-40°C to +125°C Wide**
STORAGE TEMPERATURE RANGE	-55°C to +125°C
AGING	±3 ppm per year max
LOAD CAPACITANCE	6pF, 7pF, 9pF, 12.5 pF*
EQUIVALENT SERIES RESISTANCE	70 kΩ max
SHUNT CAPACITANCE	1.1 pF typ
DRIVE LEVEL	0.5 μW max
SHOCK RESISTANCE	±5 ppm max 75 cm Drop Test Onto a Hard Wood Surface
REFLOW CONDITIONS	260°C For 10s max

Note:\* Other values available

\*\* Available only with 20 ppm frequency tolerance

#### ● PART NUMBERING SYSTEM

TYPE	-	FREQUENCY kHz	-	LOAD CAPACITANCE pF	-	TOLERANCE PPM	-	OPERATING TEMPERATURE	-	TAPE & REEL
RT3215	-	32.768	-	6, 7, 9 or 12.5	-	Blank: 20 10: 10	-	Blank: -40 to +85°C EXT1: -40 to +125°C	-	TR



Note:\* Other values available.

\*\*Available only with 20 ppm frequency tolerance

#### EXAMPLE: RT3215-32.768-12.5-TR

Surface Mount Tuning Fork Crystal, 3.2 mm x 1.5 mm package, 32.768 kHz, 12.5 pF load, ±20 ppm Tolerance, Operating Temperature from -40°C to +85°C, Tape and Reel packaging

#### MECHANICAL SPECIFICATION

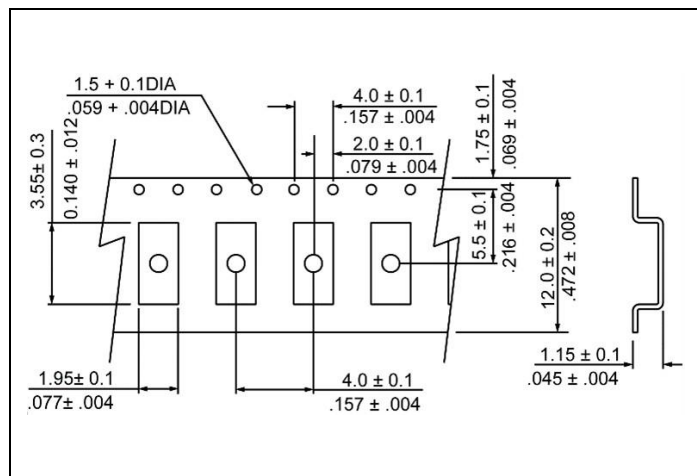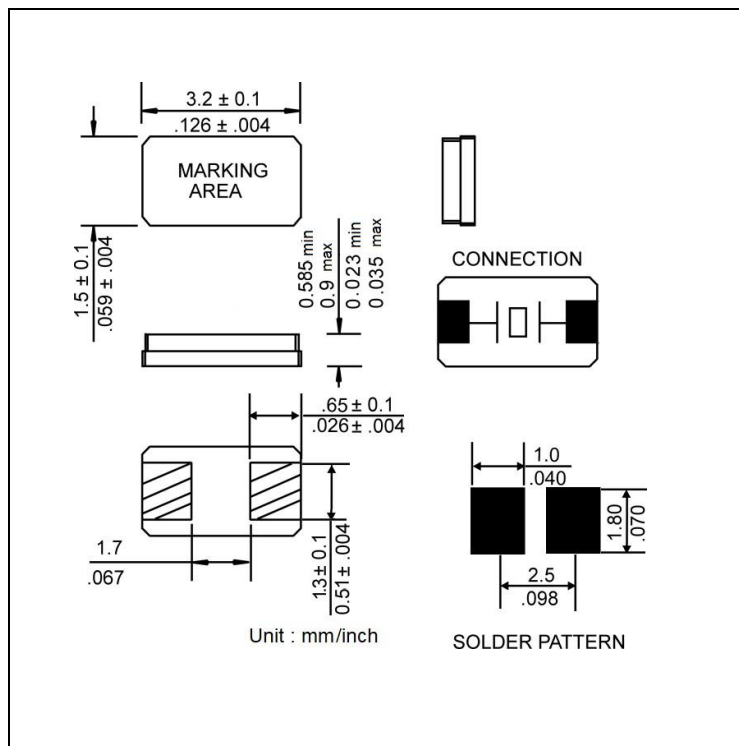


NOTE: REFER TO EIA-481 FOR DIMENSIONS

#### PACKAGING

180 mm REEL DIAMETER  
12 mm TAPE WIDTH, 4mm PITCH  
QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

#### REFLOW PROFILE

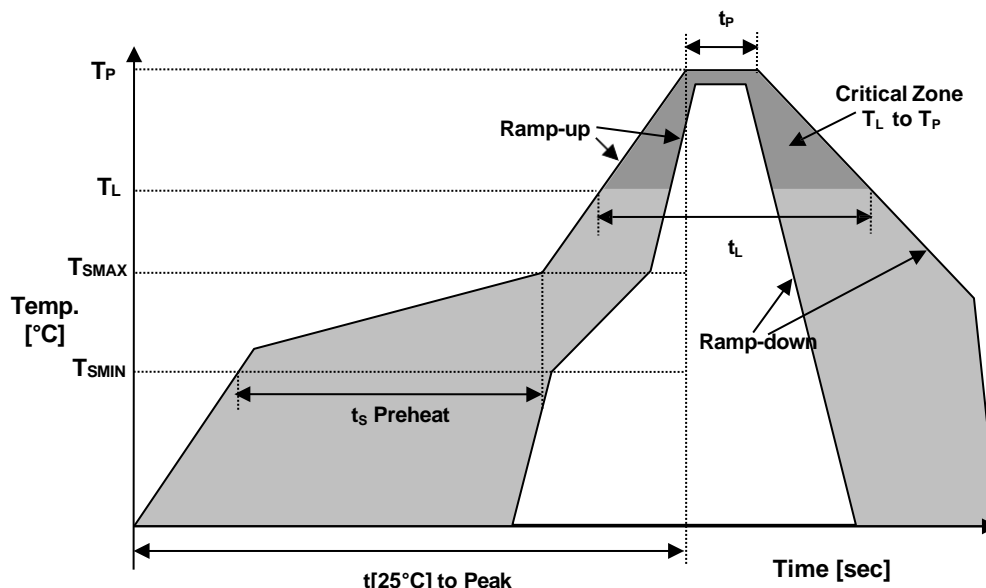

Reflow profile (Reference IPC/JEDEC J-STD-020)		
Temperature Min Preheat	T <sub>SMIN</sub>	150°C
Temperature Max Preheat	T <sub>SMAX</sub>	200°C
Time (T <sub>SMIN</sub> to T <sub>SMAX</sub> )	t <sub>s</sub>	60-180 sec.
Temperature	T <sub>L</sub>	217°C
Peak Temperature	T <sub>P</sub>	260°C
Ramp-up rate	R <sub>UP</sub>	3°C/sec max.
Ramp-down rate	R <sub>DOWN</sub>	6°C/sec max.
Time within 5°C of Peak Temperature	t <sub>p</sub>	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t <sub>L</sub>	60-150 sec.

#### ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	COMPLIANT
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



February 2022

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.