


Features

- 2.75x1.85x0.95mm Top Port
- Single Ended Analog Output
- SNR of 59dBA
- RF Shielded
- Compatible with Standard SMD Reflow Technology
- RoHS Compliance & Halogen Free


Applications

- Smart Phones
- TWS Headsets
- Smart Speakers
- Wearable Electronics
- Portable Electronics
- Smart Home Electronics



Description: RMIC-94-3.6-2718-RG-NS3 is a small package, single-ended output top port analog MEMS microphone. The MEMS Microphones are integrated with specialized Pre-amplification ASIC to provide high sensitivity, high SNR output from a capacitive audio sensor. It's packaged for surface mounting and high temperature re-flow assembly.

BLOCK DIAGRAM

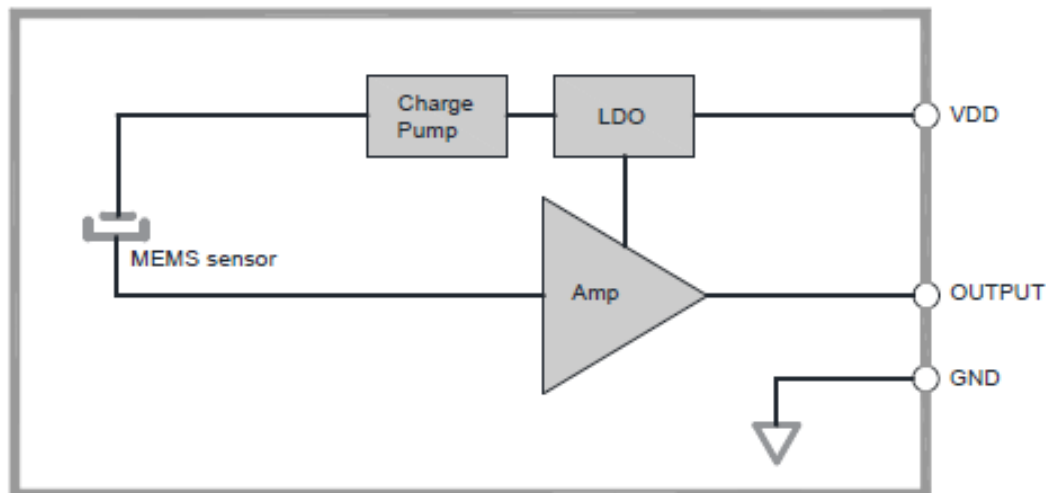

ABSOLUTE MAXIMUM RATINGS

Parameters	Value			Unit
	min	typ	max	
Supply Voltage			3.6	V
Supply Current			1	mA
Output Current			1	mA
Operation Temperature Range	-40		+85	°C
Storage Temperature Range	-40		+85	°C

Note : Stresses at the maximum ratings shown in Table may cause permanent damage to the device. These are stress ratings only at which the device may not function when an operation at these or any other condition beyond those specified under "Electro-Acoustic Specifications".


ELECTRICAL SPECIFICATIONS

Test condition: Vdd=2.0V, no load, unless otherwise specified.


Parameters		Value			Unit
		min	typ	max	
Directivity		Omni-Directional			
Sensitivity (S)	94db SPL@ 1kHz	-43	-42	-41	dB
Current Consumption (I)	Vdd= 2.0V		110	150	uA
Operating Voltage	Vdd	1.6	2.0	3.6	V
Output Impedance	@1kHz			400	Ω
S/N Ratio (SNR)	@ 20-20kHz Bandwidth, A-Weighted		59		dBA
Total Harmonic Distortion (THD)	@ 94dB SPL @1kHz			0.5	%
Acoustic Overload Point (AOP)	@10% THD @1kHz		128		dB
Power Supply Rejection	@100mVpp Square wave, 217Hz, A-weighted		-95	-80	dB
Power Supply Rejection Ratio	@200mVpp Sinewave @1kHz		70		dB
Phase	100-10KHz	-5		5	Degree
Output Load	@ C _{load}			150	pF
	@ R _{load}	10		100	kΩ

Note: Frequency response, sensitivity, phase and current consumption are tested by 100% on product line.


DIMENSIONS

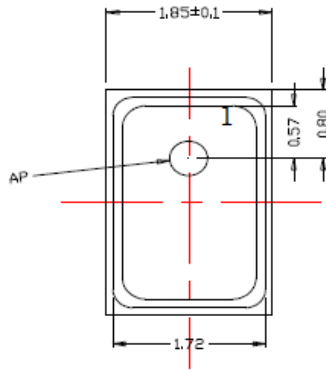

Top View



Side View



Bottom View


Unit: mm Unmarked Tolerance: ± 0.1 (mm)

Item	Dimension	Tolerance(+/-)	Units
Length(L)	2.75	0.10	mm
Width(W)	1.85	0.10	mm
Height(H)	0.95	0.10	mm
Acoustic Port(AP)	$\varnothing 0.5$	0.05	mm


Pin	Pin Name	Type	Description
1	V _{DD}	Power	Power Supply
2	Output	Signal	Output Signal
3,4	GND	Ground	Ground

Note: All Ground Pin must be connected to the ground in end application


PICKUP TOOL PICK LOCATION & PCB SOLDER PAD



PCB Land pattern




Solder stencil pattern




Pick up area

FREQUENCY CHARACTERISTICS

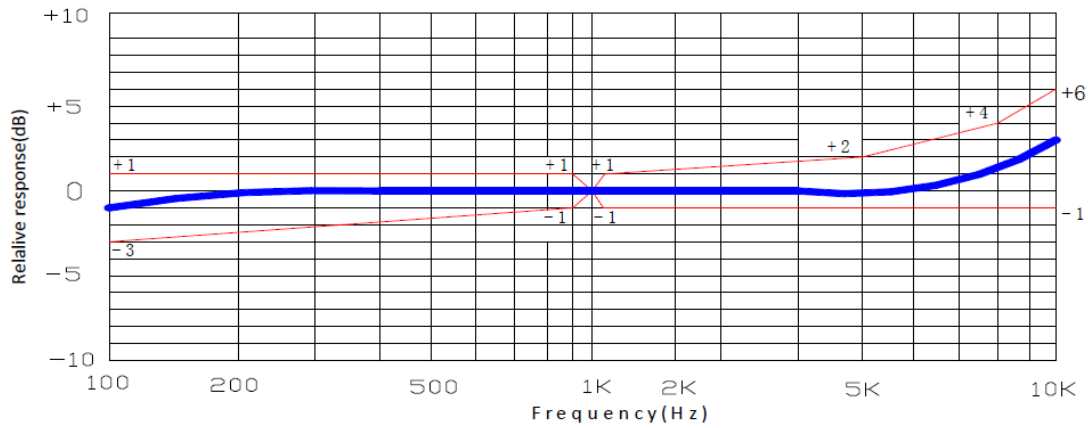


Frequency response curve normalized to 1kHz

MEASUREMENT SYSTEM SETUP

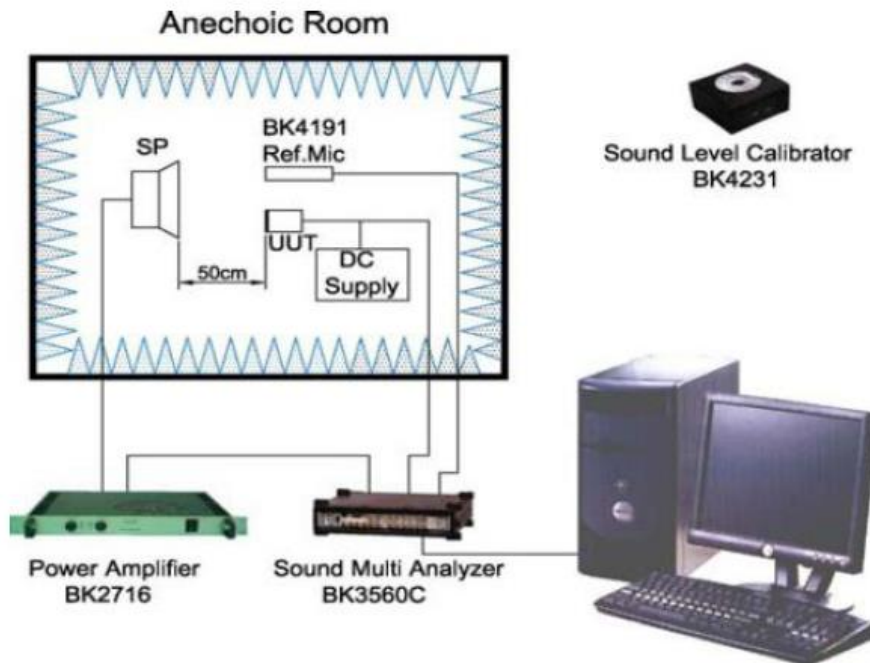


Measurement System Setup

TYPICAL APPLICATION CIRCUIT

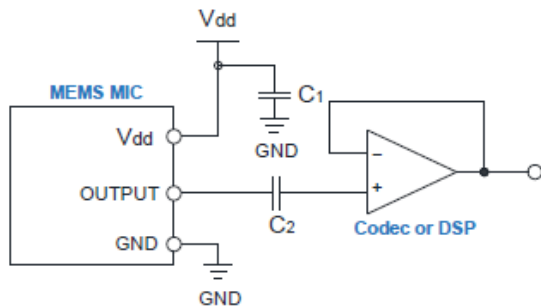


Single ended input interface circuit

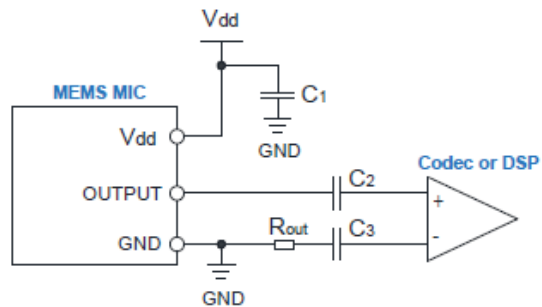

Differential input interface circuit


REFLOW PROFILE

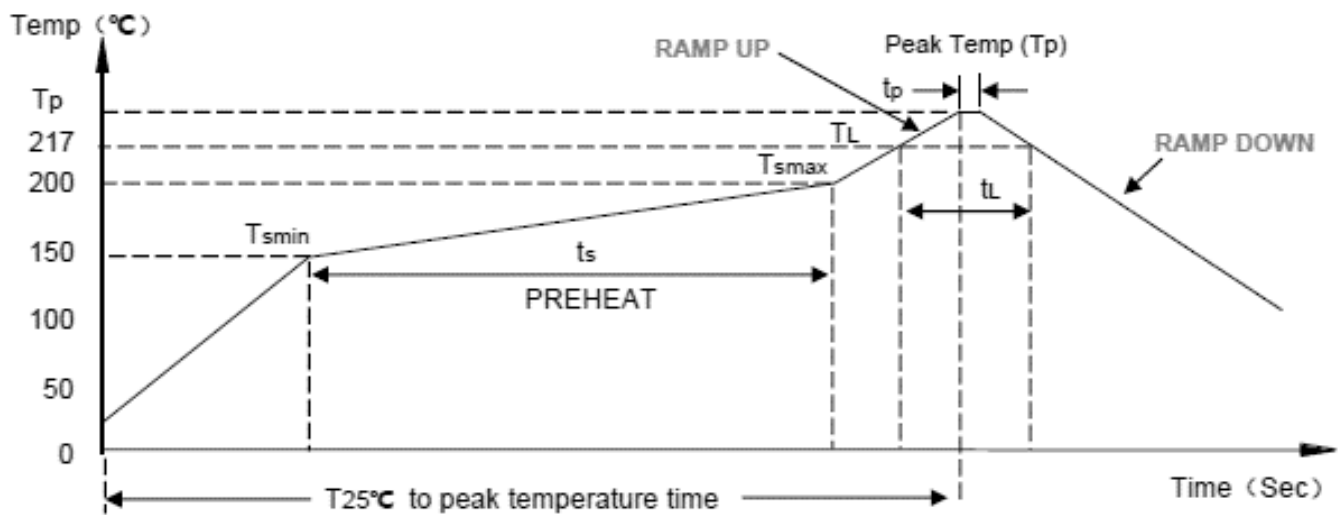


Parameter		Specification
Average temperature change rate (TSMAX to TP)		3°C /second max.
Preheat	Temperature min.(TSMIN)	150°C
	Temperature max.(TSMAX)	200°C
	Time TSMIN to TSMAX	60-180 Seconds
Time Maintained Above Liquidous		60-150 Seconds
Liquidous Temperature		217°C
Peak Temperature		260°C +0°C/-5°C
Time Within +5°C of Actual Peak Temperature		20 sec to 40 sec
Ramp-Down Rate		3°C/sec max
Time +25°C (t25°C) to Peak Temperature		8 min max

PACKAGING

13" Reel drawing:

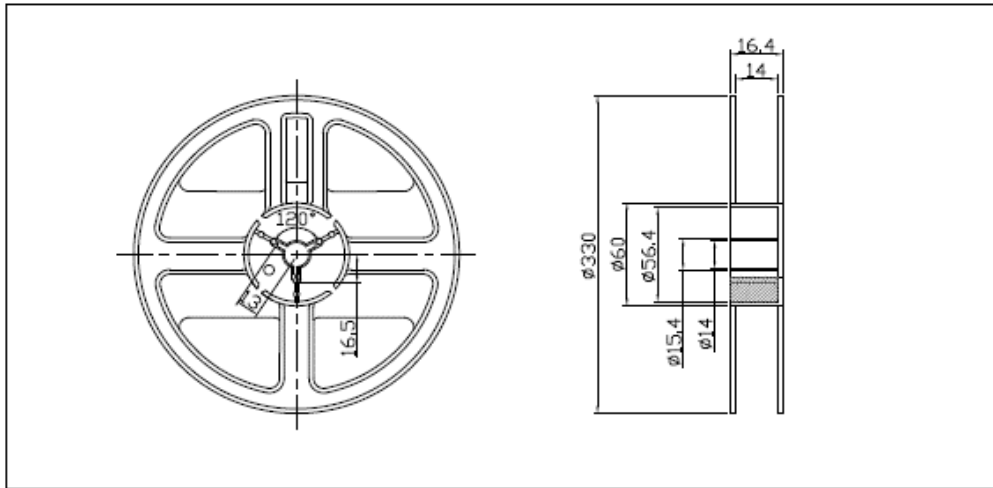

Tape drawing:

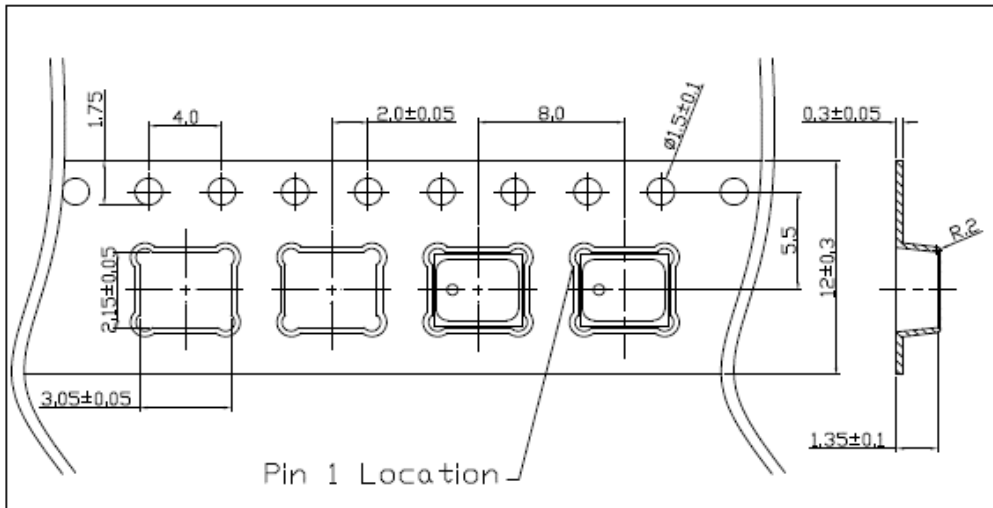

APPROVAL

DRAWN BY	JS, May 28, 2024
APPROVED BY	AR, May 28, 2024
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages. Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.