

OCXO SERIES 1500



ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Frequency Range	f_0		10.000		40.000	MHz
Supply Voltage	V_s	$V_s \pm 5\%$	3.135	3.3	3.465	V
Power Consumption	P_s	Steady state, @ 25°C			1.1	W
	$P_{s,w}$	During warm-up, @ 25°C			2.5	W
Warm-up Time	t_w	$V_s, T_a = +25^\circ\text{C}$, within $\pm 100\text{ppb}$ of final frequency with reference after 1 hour on			5	min
Frequency Calibration	$\Delta f/f_0$	$V_C = 1.65\text{V}$, $T_a = +25^\circ\text{C}$, after 15mins power on ref. to nominal frequency	-200		+200	ppb
Frequency Stability vs. Temperature	$\Delta f/f_0 (T_a)$	Ref to 25°C, over -40 ~ +85°C, 19.2 MHz	-5		+5	ppb
Frequency Stability vs. Supply Voltage	$\Delta f/f_0 (\Delta V_{CC})$	$T_a = 25^\circ\text{C}$, $V_s \pm 5\%$	-1		+1	ppb
Frequency Stability vs. Load Variation	$\Delta f/f_0 (\Delta I)$	$T_a = 25^\circ\text{C}$, V_s , load $\pm 10\%$	-1		+1	ppb
Aging, after 30 days of operation	$\Delta f/\Delta t_d$	Per day	-1.0		+1.0	ppb
	$\Delta f/\Delta t_y$	First year	-100		+100	ppb
	$\Delta f/\Delta t_y$	10 years	-400		+400	ppb
Operating Temperature Range			-40		+85	°C
Storage Temperature	$T_{(stg)}$		-40		+105	°C
Short Term Stability		$\tau = 1\text{s}$, still air			0.05	ppb
Start-up Time					100	ms
Control Voltage Range	V_C		0	1.65	3.3	V
Frequency Tuning Range		$V_C = 0\text{V}$	-4		-2	ppm
		$V_C = 1.65\text{V}$	-200		+200	ppb
		$V_C = 3.3\text{V}$	+2		+4	ppm
Linearity			-10		+10	%
Input Impedance			100			k Ω
Slope		Positive	-	-	-	-

OCXO SERIES 1500

PHASE NOISE

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
@1 Hz Offset	$\mathcal{E} (\Delta f)$				-80	dBc/Hz
@10 Hz Offset	$\mathcal{E} (\Delta f)$				-110	dBc/Hz
@100 Hz Offset	$\mathcal{E} (\Delta f)$				-135	dBc/Hz
@1 kHz Offset	$\mathcal{E} (\Delta f)$				-145	dBc/Hz
@10 kHz Offset	$\mathcal{E} (\Delta f)$				-150	dBc/Hz
@100 kHz Offset	$\mathcal{E} (\Delta f)$				-153	dBc/Hz

CMOS OUTPUT CHARACTERISTICS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Output Levels	VOH/VOL	$V_{CC} = 3.3V$, load = 15pF		2.4/0.4		V
Duty Cycle	DC	load = 15pF		45/55		%
Rise/Fall Time	t_r/t_f	10% ~ 90% Vout			5	ns
Load				15		pF

SINE-WAVE OUTPUT CHARACTERISTICS


PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Output Levels			5	7	9	dBm
Harmonics					-40	dBc
Spurious					-80	dBc
Load				50		Ω

OCXO SERIES 1500

ENVIRONMENTAL MECHANICAL CONDITIONS

Storage temperature range	-55°C to +105°C
Drop Test	The test shall be carried out as the provisions of the IEC60028-2-32 test Ed. 10cm height, 3 times on hard board with thickness of 3cm
Bumping Test	Device are bumped to three mutually perpendicular axes at peak acceleration of 400m/s ² , each 4000±10times, 6ms pulse duration time
Vibration Test	Frequency range: 1Hz-4Hz-100Hz-200Hz Acceleration: 0.0001g ² /Hz-0.01g ² /Hz-0.01g ² /Hz-0.001g ² /Hz Grms=1.15g Sweep time: 30 minutes (perpendicular axes each sweep time)
Mechanical Shock	100g, 6mS duration, 1/2 sine wave, 3 shocks each direction along 3 mutually perpendicular planes.
Thermal shock	0.5h@-40°C , 0.5h@+85°C , Note: the changing time < 30 seconds, cycling for 100 times

MECHANICAL DIMENSIONS AND PIN FUNCTIONS

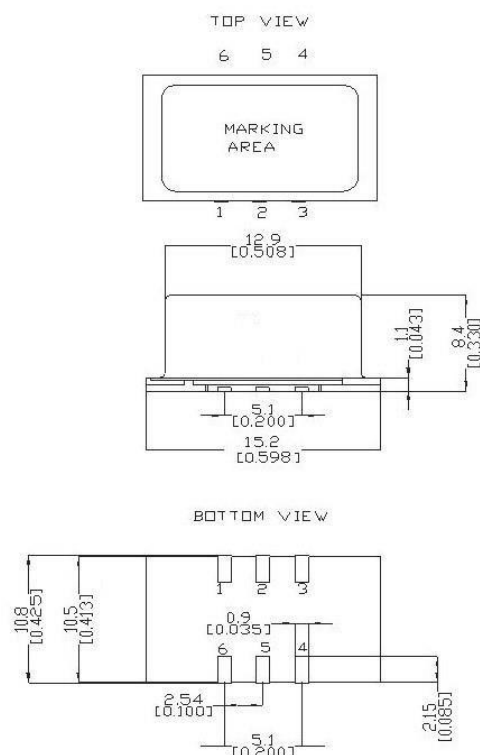

OCXO SERIES 1500

PIN	SYMBOL	FUNCTION
1	N/C or V _c	No connector or Control Voltage
2	N/C	No connect
3	GND	Case/Ground
4	OUTPUT	RF Output
5	N/C	No connect
6	V _s	Supply Voltage

■ PART NUMBERING SYSTEM

Prefix	Output Type	Control Voltage	Series	Revision	Temperature Range	Stability	Frequency	Supply Voltage
OX	4: CMOS 6: SINE	1: No Control Voltage 5: Control Voltage	15:1500	A	First letter: Lowest Temperature, Second letter: Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C Steps Example: HZ: -20°C to +70°C LZ: 0°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in ppm Example: 0.5= 5 ppb 1= 0.01 ppm	In MHz	3.3: 3.3V

OX 4 5 15 A-D3-1-20.000- 3.3

OX	Supply Voltage 3.3V
4	Frequency 20 MHz
5	Temp Stability = 1 x 10E -2 = ±0.01 ppm
15	Operating Temp Range = -40° C to 85°C
A	Revision "A"
D3	SERIES 1500
1	Electrical Control Voltage
20.000	Output LCMOS
3.3	Prefix: OCXO

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

March 2021