


Items		Specification	Unit
Center frequency (Fo)		110.592	MHz
Bandwidth		1152	KHz
Insertion Loss in BW		4.5	dB max
Group Delay Ripple (p-p), maximum		0.7	μsec
Relative Attenuation	105.592 MHz	50	dB min
	107.092 MHz	42	dB min
	108.592 MHz ~ 112.592 MHz	30	dB min
	114.092 MHz	40	dB min
	115.592 MHz	40	dB min
In/Out Impedance		300 Ω // 1.2 μH	
DC Voltage		3 Vdc	
Input Power, maximum		0 dBm	
Operation Temperature		-20°C to +70°C	
Storage Temperature		-40°C to +85°C	


Dimension

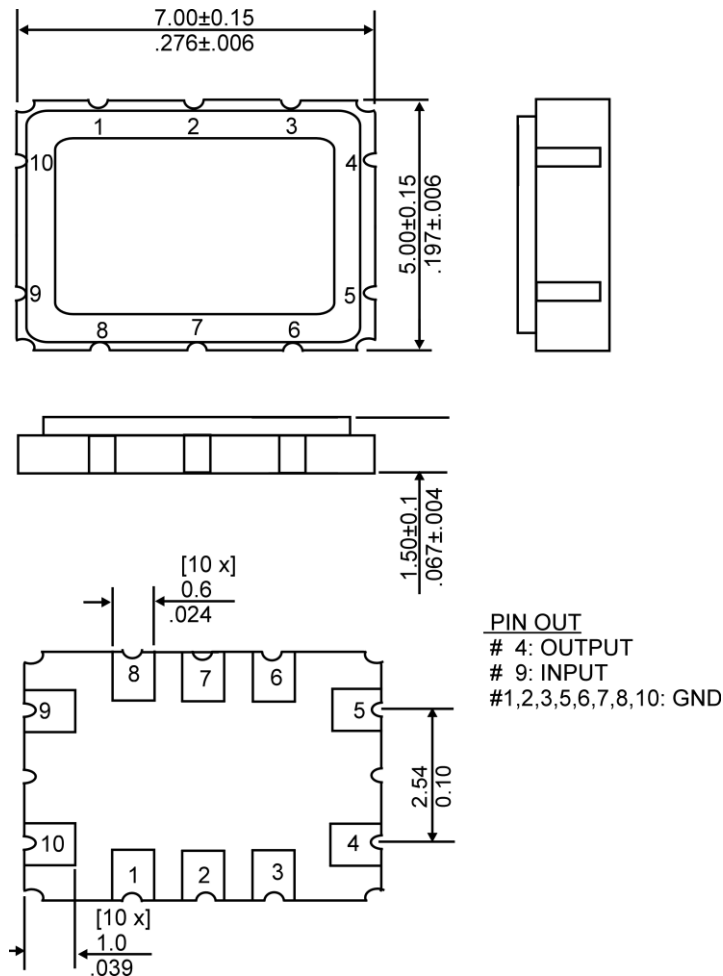

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Frequency Characteristics

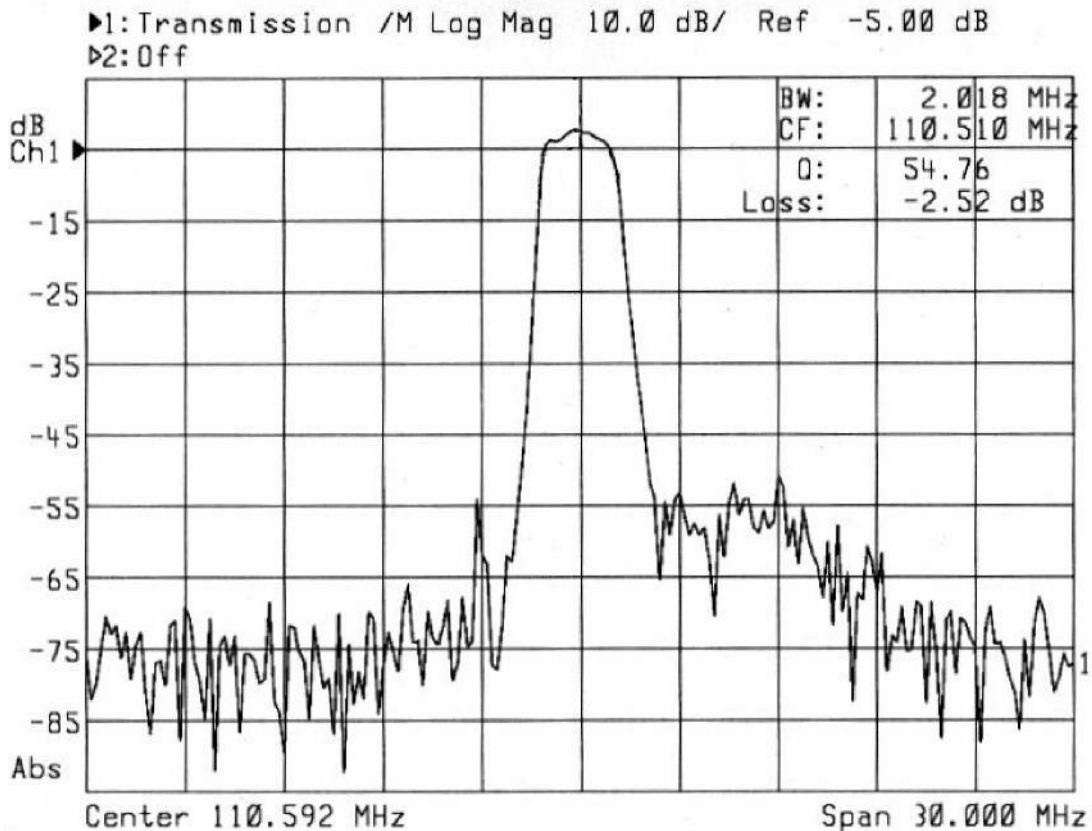

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless.



A **RAMI TECHNOLOGY** Company

RF SAW FILTER
RSF-110.592-1152-5070-TR

page 3 of 3

against all damages.