


Items		Specification	Unit
Center frequency (Fo)		1216.000	MHz
Bandwidth		8000	KHz
Insertion Loss in BW		5.5	dB max
Pass band Ripple (p-p)		1.2	dB max
Group Delay Ripple, typical		10	nsec
Relative Attenuation	500.0 KHz ~ 11250.0 MHz	51	dB min
	1125.0 MHz ~ 1131.0 MHz	50	dB min
	1140.0 MHz ~ 1148.0 MHz	50	dB min
	1172 MHz	47	dB min
	1180 MHz	47	dB min
In/Out Impedance		200Ω	
Operation Temperature		-35°C to +75°C	
Storage Temperature		-40°C to +85°C	


### Dimension

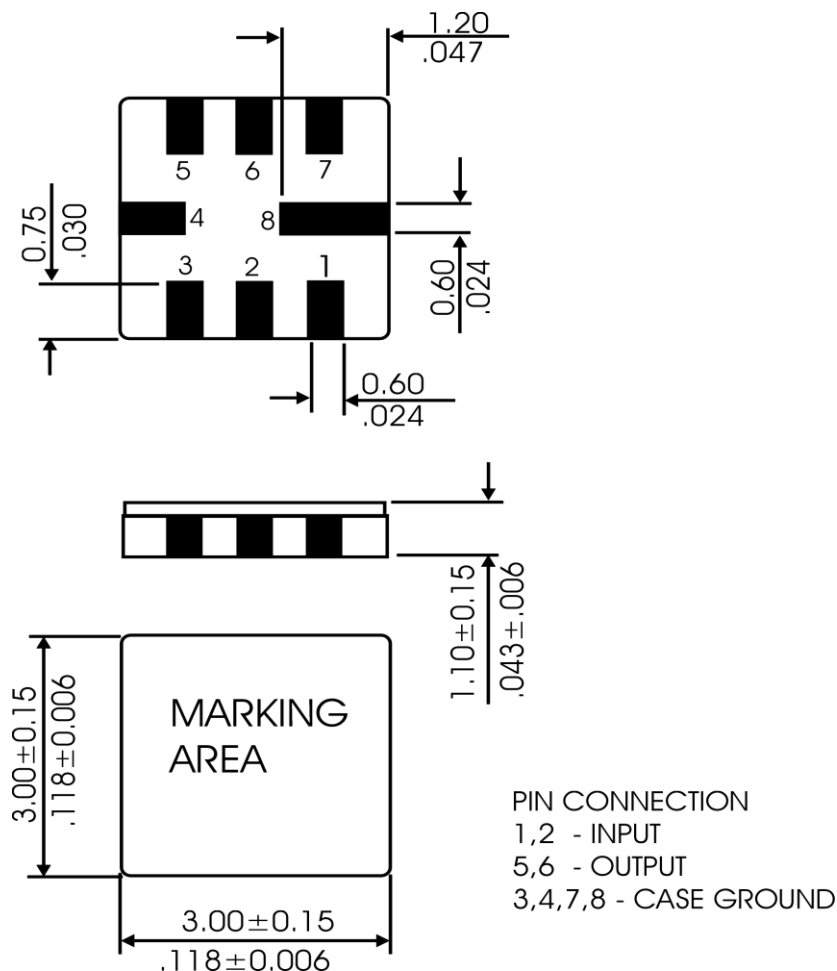

### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

### Frequency Characteristics

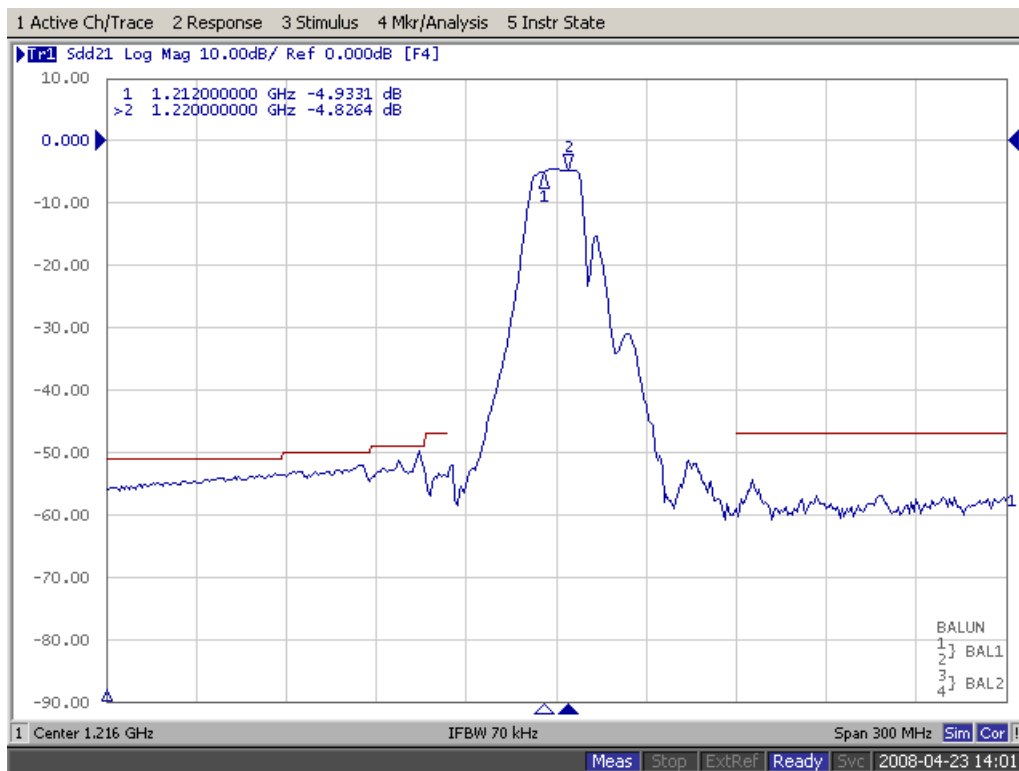

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless.



A **RAMI TECHNOLOGY** Company

**RF SAW FILTER**  
**RSF-1216.000-8000-3030-TR**

page 3 of 3

against all damages.