


Items	Specification	Unit
Center frequency(Fo)	169.400	MHz
Bandwidth	200	KHz
Insertion Loss in BW	3.0	dB max
Attenuation	DC ~ 165 MHz	40
	165 ~ 167.4 MHz	20
	171.4 ~ 179.4 MHz	20
	179.4 ~ 1500 MHz	38
In/Out Impedance	50 Ω	
Input power Maximum	10 dBm	
DC Maximum Voltage	10 VDC	
Operation Temperature	-40°C to +85°C	
Storage Temperature	-45°C to +85°C	

Dimension

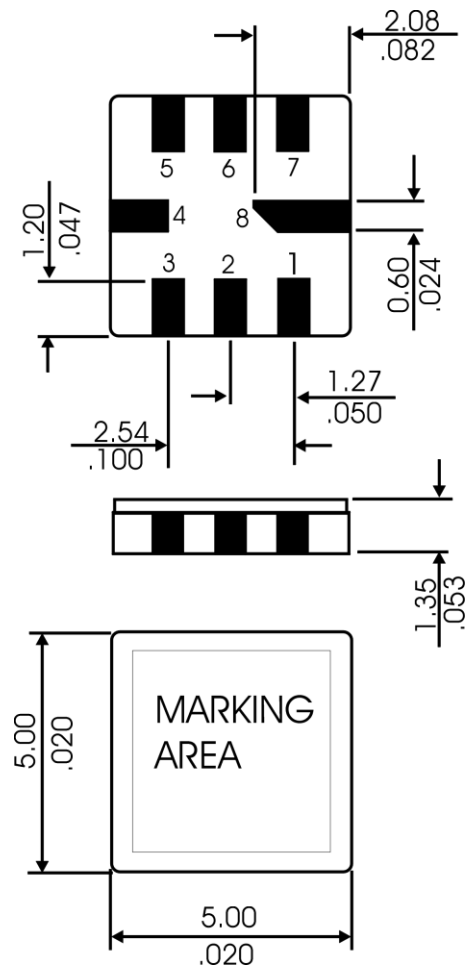


PIN CONNECTION
 2 - INPUT / OUTPUT
 6 - OUTPUT / INPUT
 4,8 - CASE GROUND

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Frequency Characteristics

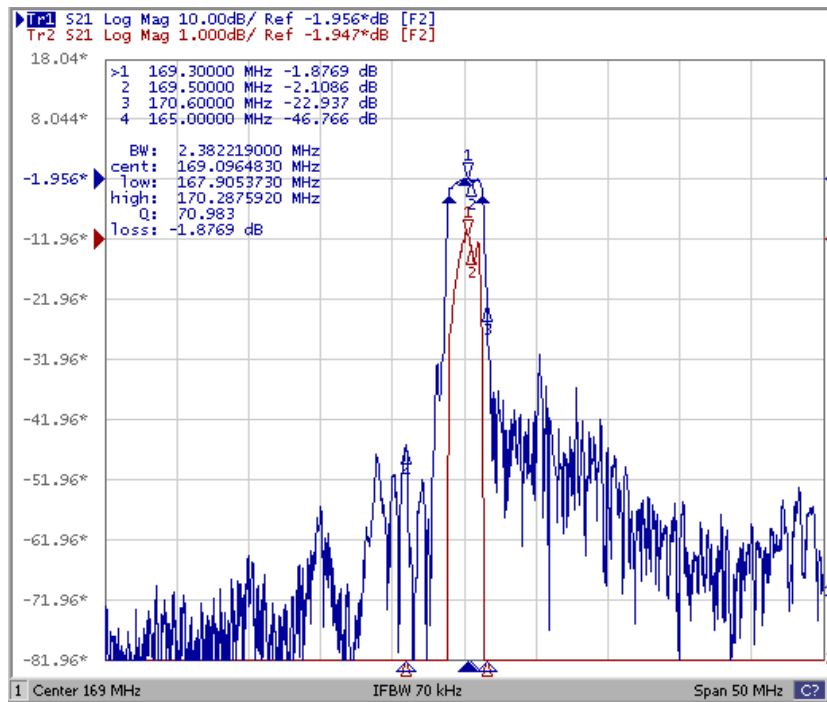

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.