




Items		Specification	Unit
Center frequency (fo)		2332.50	MHz
Bandwidth		25000	kHz
Insertion Loss (BW), Maximum		2.5	dB
Amplitude Ripple (BW), Maximum		1.0	dB max
VSWR (BW), Maximum		2.0	--
Relative Attenuation	DC ~ 2085 MHz	25	dB min
	2097 MHz ~ 2230 MHz	35	dB min
	2100 MHz	40	dB min
	2235 MHz ~2256 MHz	20	dB min
	2400 MHz	35	dB min
RF Power Dissipation, maximum		10 dBm	
DC Voltage, maximum		0 V	
In/Out Impedance		50Ω	
Operation Temperature		-30°C to +85°C	
Storage Temperature		-40°C to +85°C	

Dimension


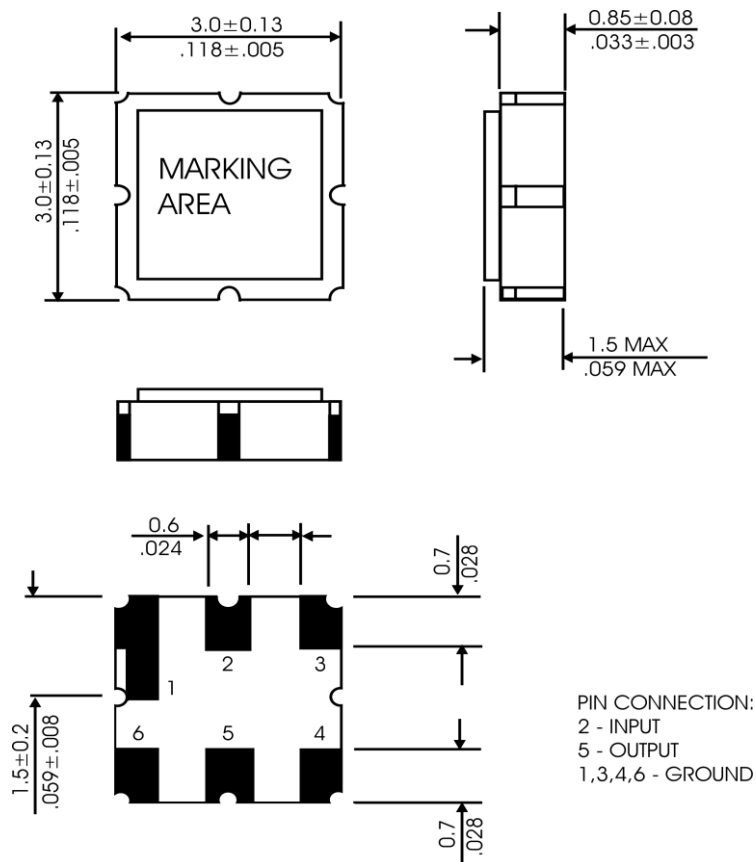


Frequency Characteristics



Frequency Response

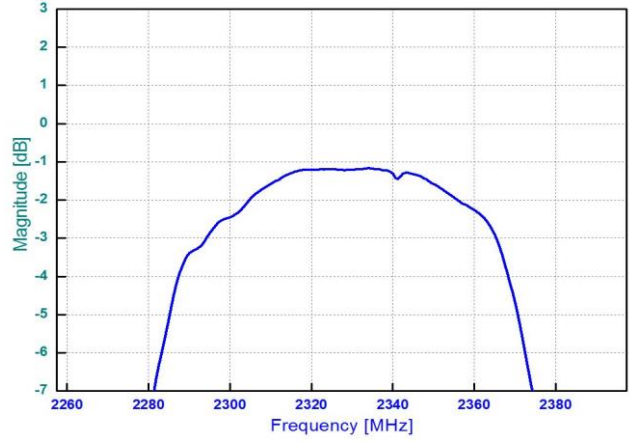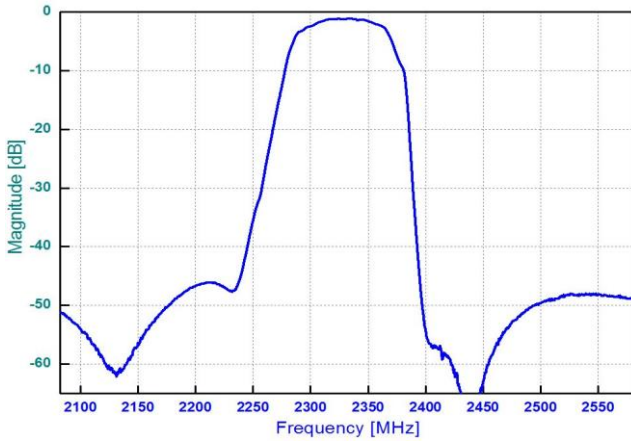

VSWR

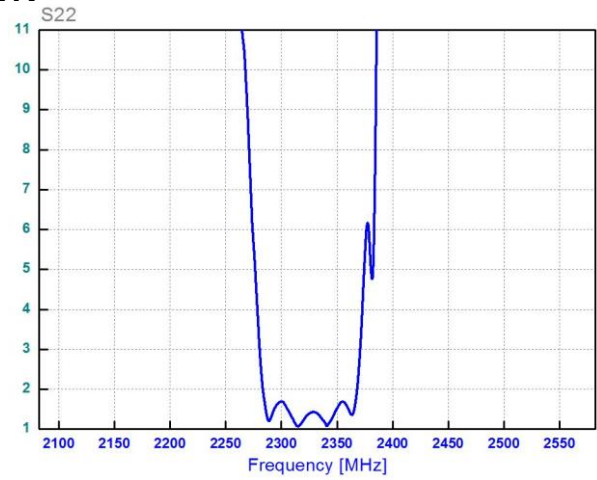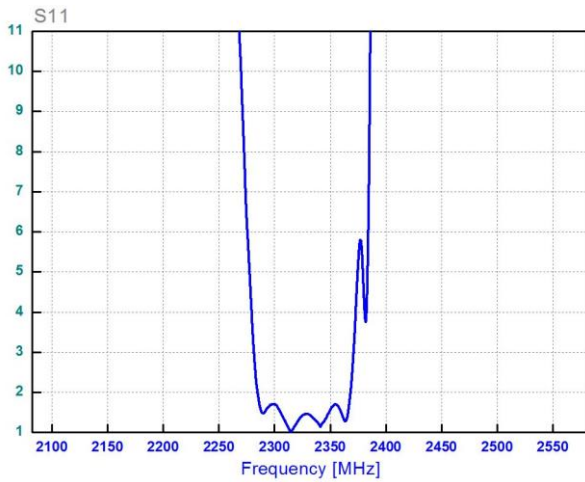

Smith Chart

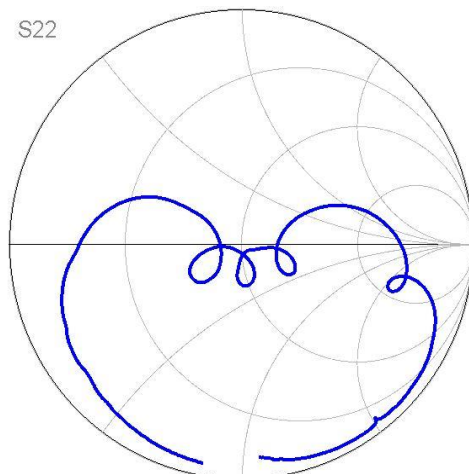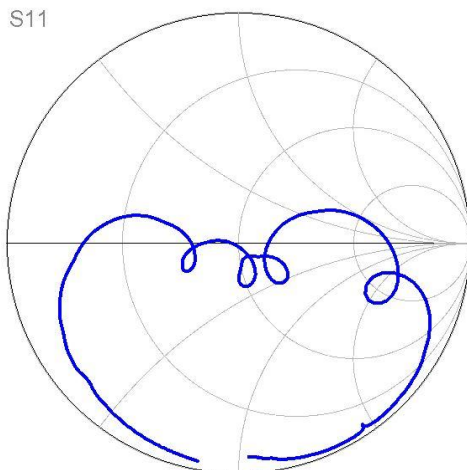


Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
TERMINATION FINISH	Au
REACH – SVHC	Compliant
RoHS 2	6/6
PACKAGING	TAPE & REEL



TAPE AND REEL

- CARRIER TAPE DIMENSIONS**

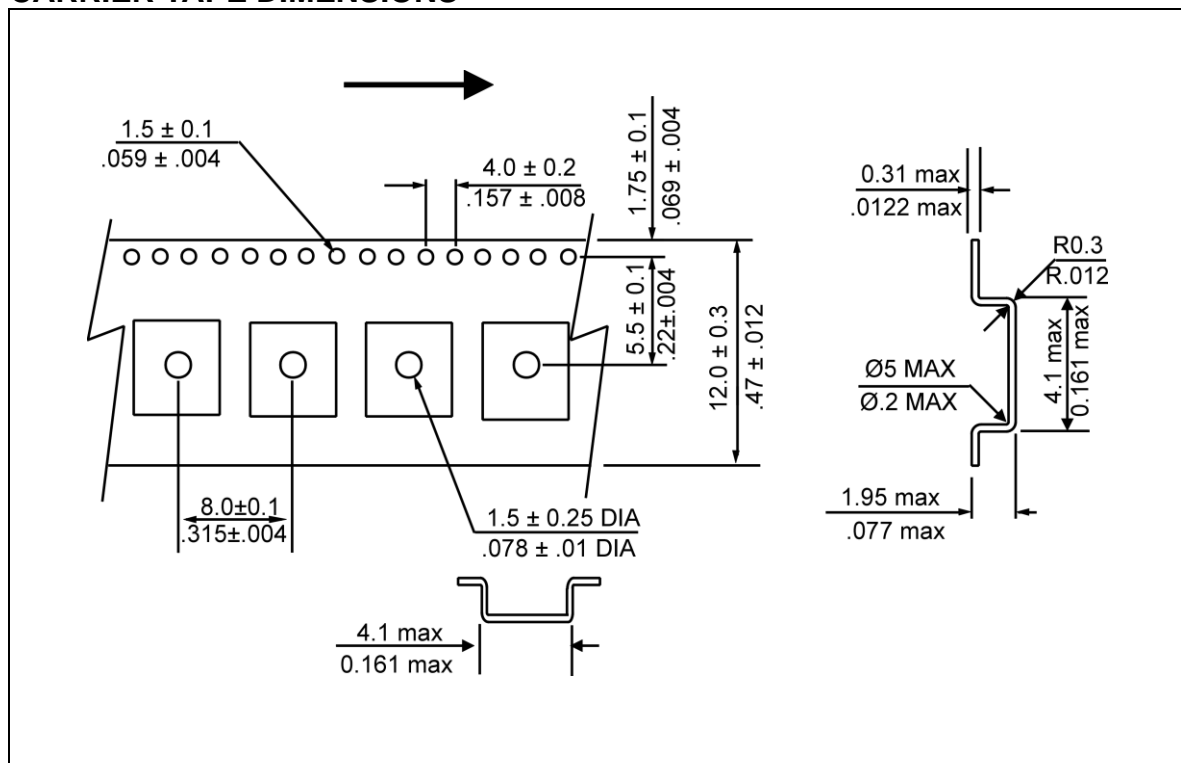

- PACKAGING**

178 mm REEL DIAMETER
12 mm TAPE WIDTH, 8 mm PITCH
QUANTITY: 1000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

● **MARKING**

R2332.5
●xyw

x – Internal Production ID code
y – Year code
w – Week code

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9

ALPHA WEEK CODE TABLE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

● **APPROVAL**

RALTRON	
DRAWN BY	F. Parra, 23 September 2015
APPROVED BY	F. Parra, 23 September 2015
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.