


Electrical Specification


Items		Specification	Unit
Insertion Loss (2620 ~2690MHz) typ/max		2.0 / 3.2	dB
Amplitude Ripple (2620 ~2690MHz), typ/max		0.8 / 2.0	dB
VSWR (2620 ~2690MHz), typ/max	Input	1.7 / 2.2	-
	Output	1.7 / 2.2	-
Absolute Attenuation min/typ	832 ~ 862 MHz	-26 / -30	dB
	1710 ~ 1785 MHz	-25 / -30	dB
	2400 ~ 2500 MHz	-32 / -38	dB
	2500 ~ 2570 MHz	-37 / -42	dB
	2775 ~ 4900 MHz	-25 / -35	dB
	4900 ~ 5950 MHz	-28 / -30	dB
Terminating Source Impedance, unbalanced		50 // 5.8	Ω // nH
Terminating Load Impedance, unbalanced		50 // 5.8	Ω // nH
Input Power, 2000h		15	dBm
Operating Temperature Range		-20 to +85	$^{\circ}\text{C}$
Storage Temperature		-40 to +85	$^{\circ}\text{C}$

Dimension

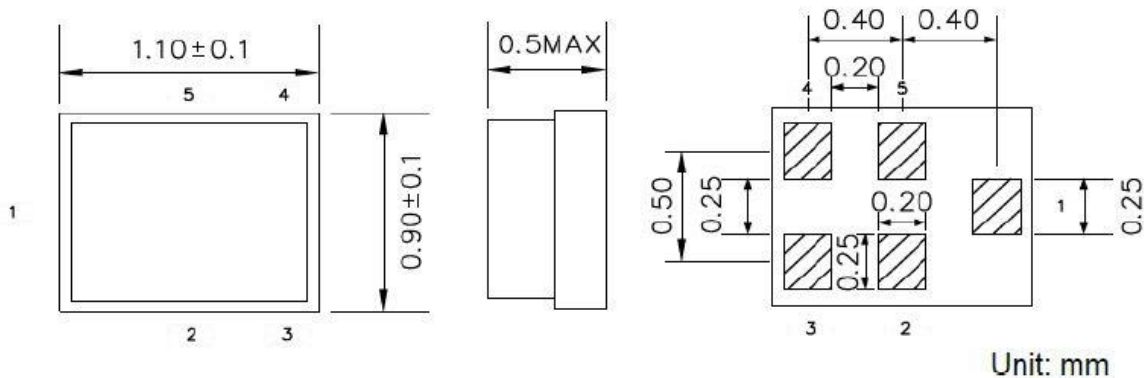

PIN #	PIN NAME	DESCRIPTION
1	Input	Unbalanced
2	GND	Ground
3	GND	Ground
4	Output	Balanced
5	GND	Ground

Frequency Characteristics

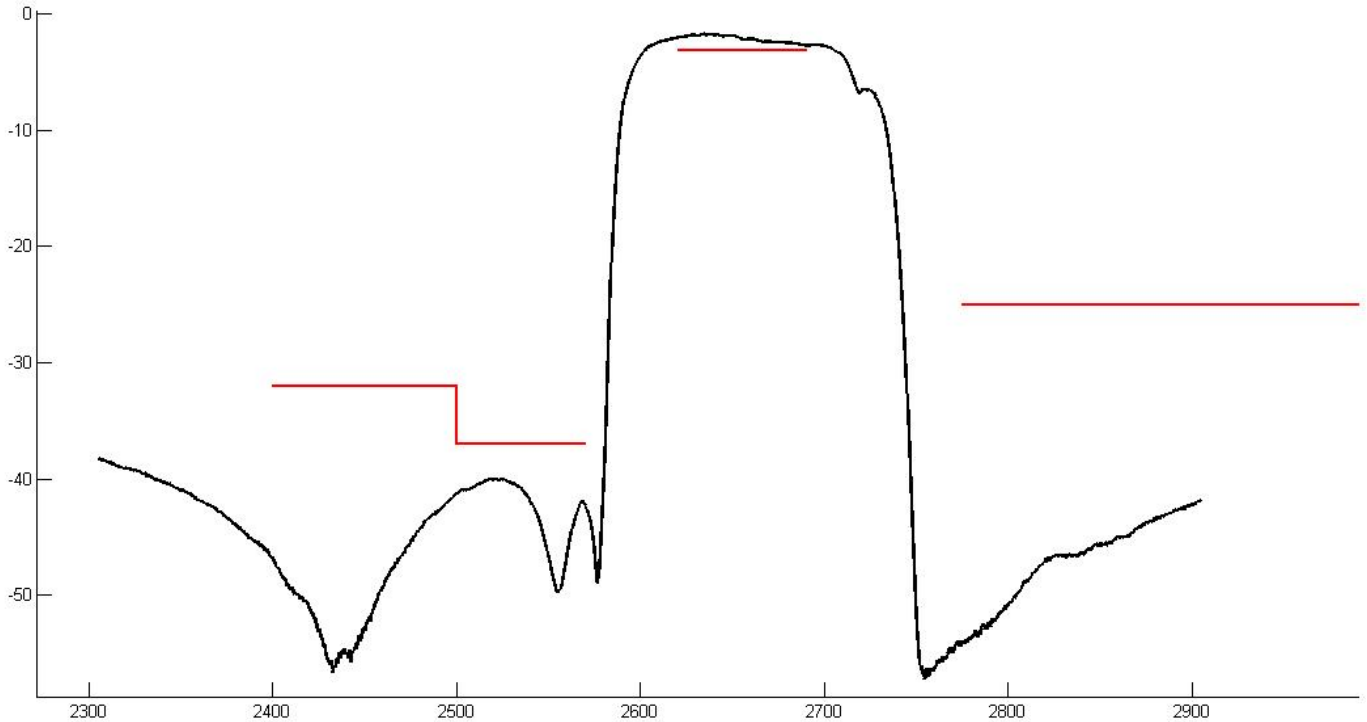

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

APPROVAL

DRAWN BY	CP, January 29, 2016
APPROVED BY	CP, January 29, 2016
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.