



Items		Specification	Unit
Center frequency (Fo)		422.500	MHz
Bandwidth		5000	KHz
Insertion Loss in BW		3.5	dB Max
Amplitude Variation in BW		1.2	dB
VSWR in BW		2.0	--
Group Delay Ripple		120	ns
Absolute Attenuation	0.30 MHz ~ 410 MHz	45	dB min
	410 MHz ~ 415 MHz	50	dB min
	450 MHz ~ 480 MHz	45	dB min
	480 MHz ~ 1000 MHz	40	dB min
	1000 MHz ~ 2000 MHz	30	dB min
RF Power		26 dBm Max	
DC Voltage		0 V	
In/Out Impedance		50 Ω	
Operation Temperature		-40°C to +85°C	
Storage Temperature		-40°C to +85°C	

### Dimension

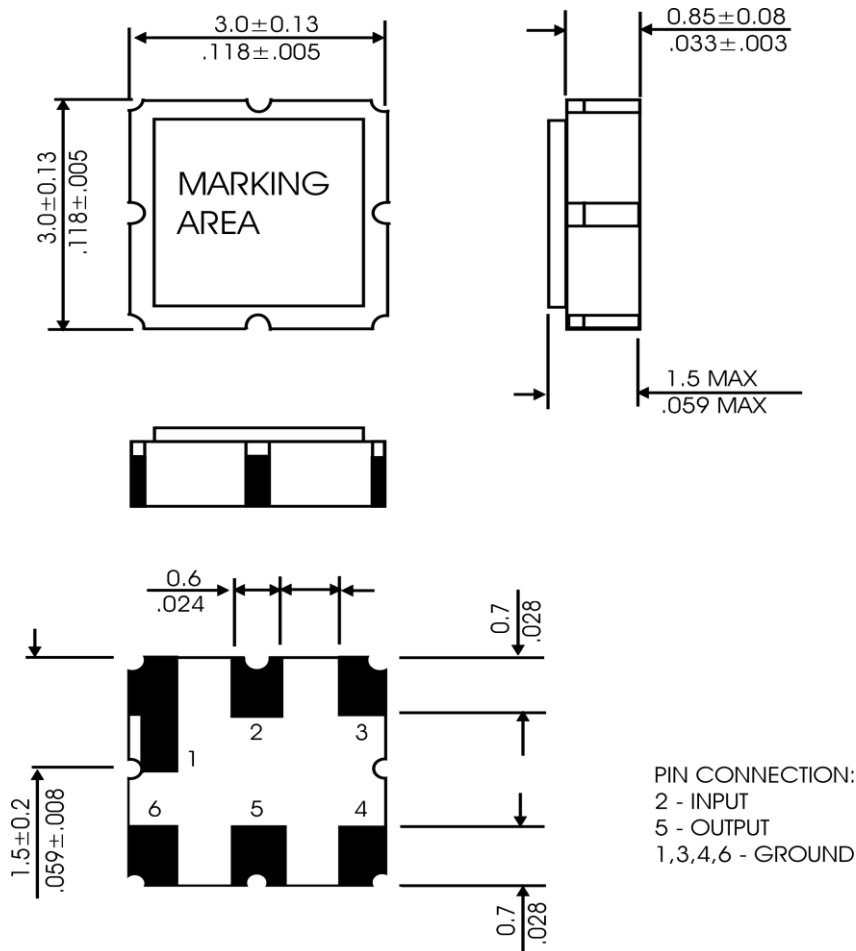

### Typical Frequency Response

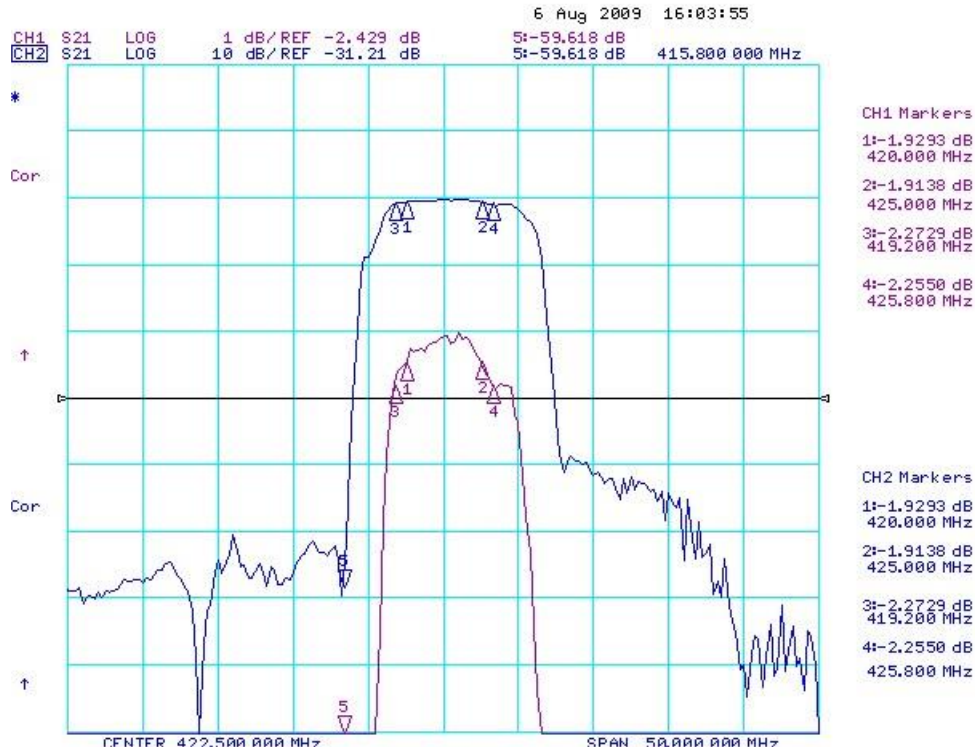

### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

### APPROVAL

DRAWN BY	F. Parra, 10 December 2014
APPROVED BY	F. Parra, 10 December 2014
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.