


Items	Specification	Unit	
Center frequency (Fo)	428.000	MHz	
Bandwidth	12000	KHz	
Pass band Ripple (p-p)	2.0	dB max	
Relative Attenuation	378.0 MHz ~ 411.0 MHz	50	dB min
	411.5 MHz ~ 410.0 MHz	37	dB min
	414.8 MHz ~ 417.8 MHz	14	dB min
	422.0 MHz ~ 434.0 MHz	3.0	dB max
	449.0 MHz ~ 478 MHz	50	dB min
DC Voltage, maximum	10V		
RF Power Dissipation, maximum	0 dBm		
In/Out Impedance	50Ω		
Operation Temperature	-40°C to +85°C		
Storage Temperature	-45°C to +85°C		


Dimension

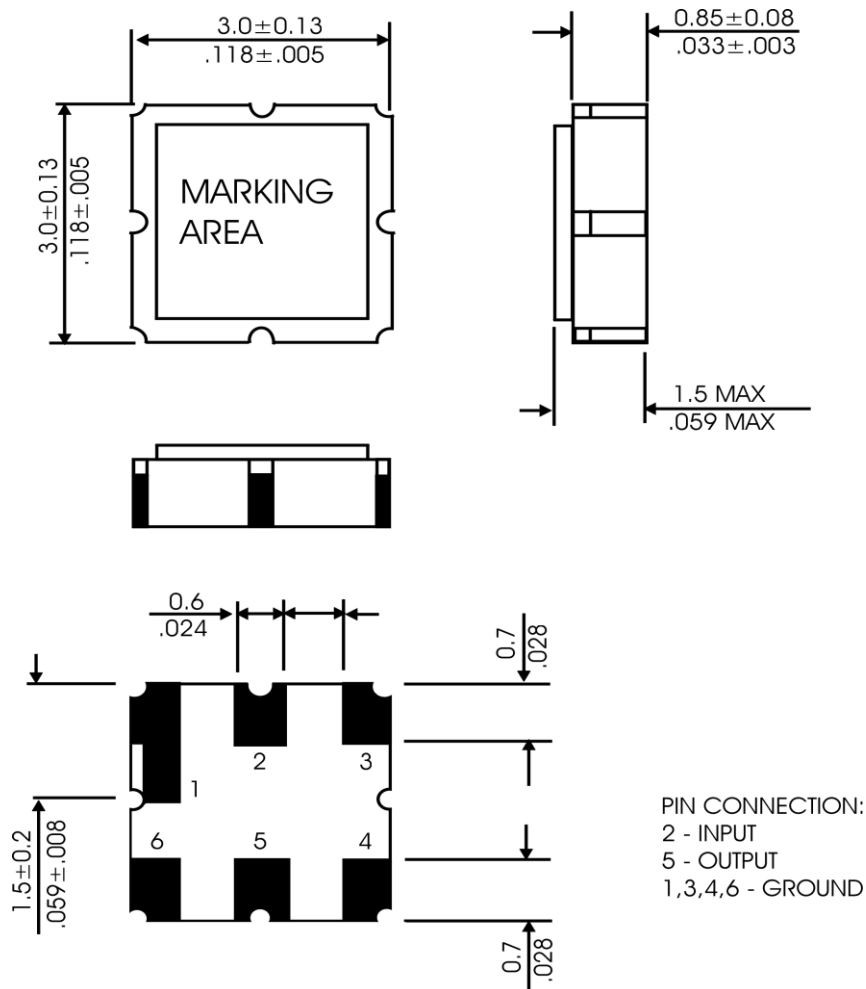

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Frequency Characteristics

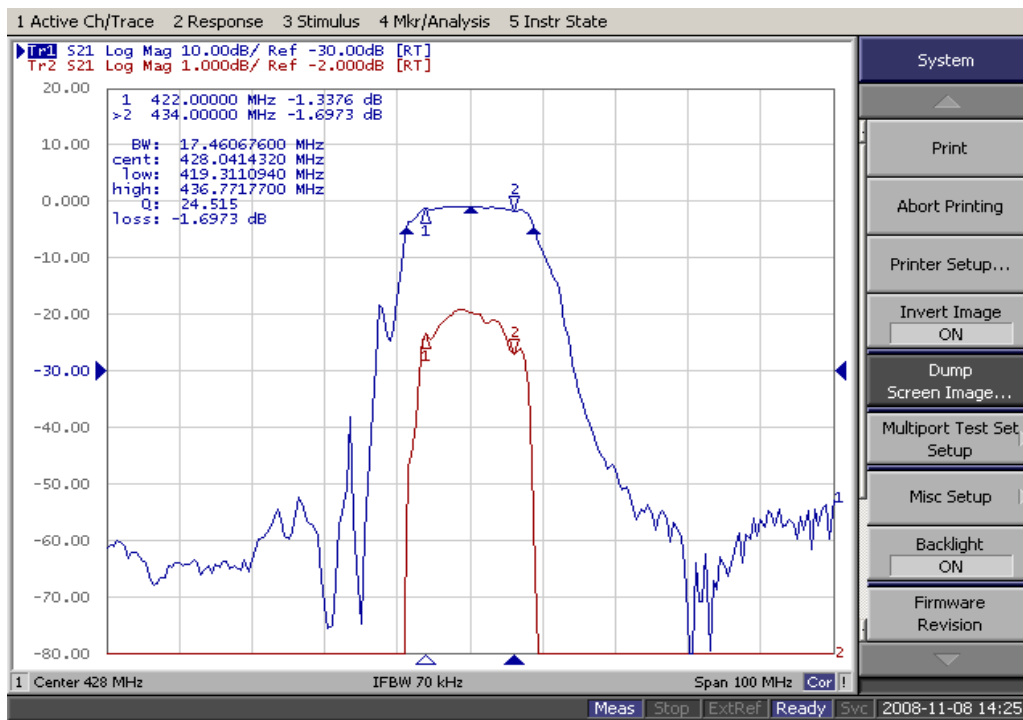

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.