



Items		Specification	Unit
Center frequency (Fo)		428.000	MHz
Bandwidth		16000	kHz
Insertion Loss in BW		3.5	dB Max
Amplitude Ripple in BW		1.8	dB Max
Absolute Attenuation	128 MHz ~ 400 MHz	45	dB min
	470 MHz ~ 728 MHz	45	dB min
RF Power		+10 dBm Max	
DC Voltage		3 V Max	
In/Out Impedance		50 Ω	
Operation Temperature		-40°C to +85°C	↔
Storage Temperature		-40°C to +85°C	↔

Dimension

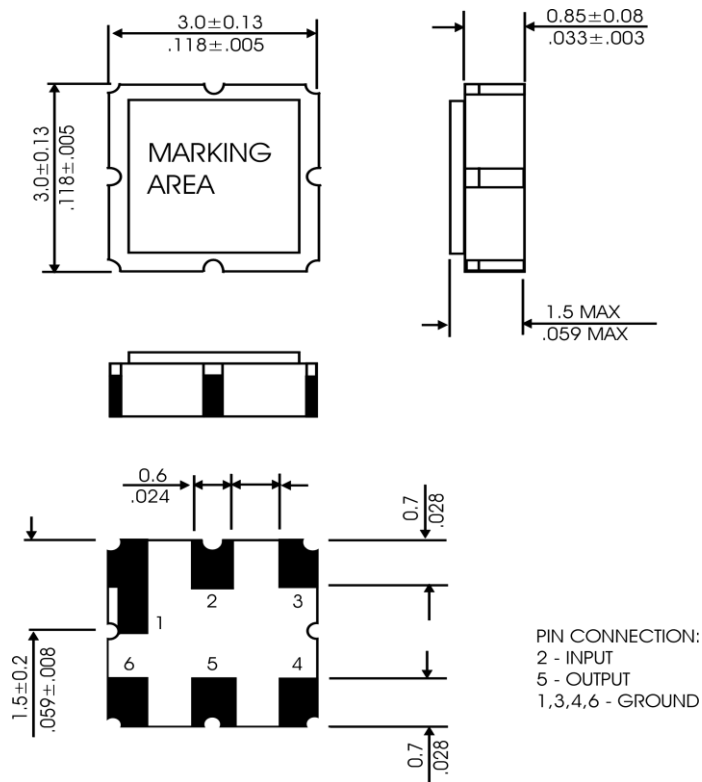

Typical Frequency Response

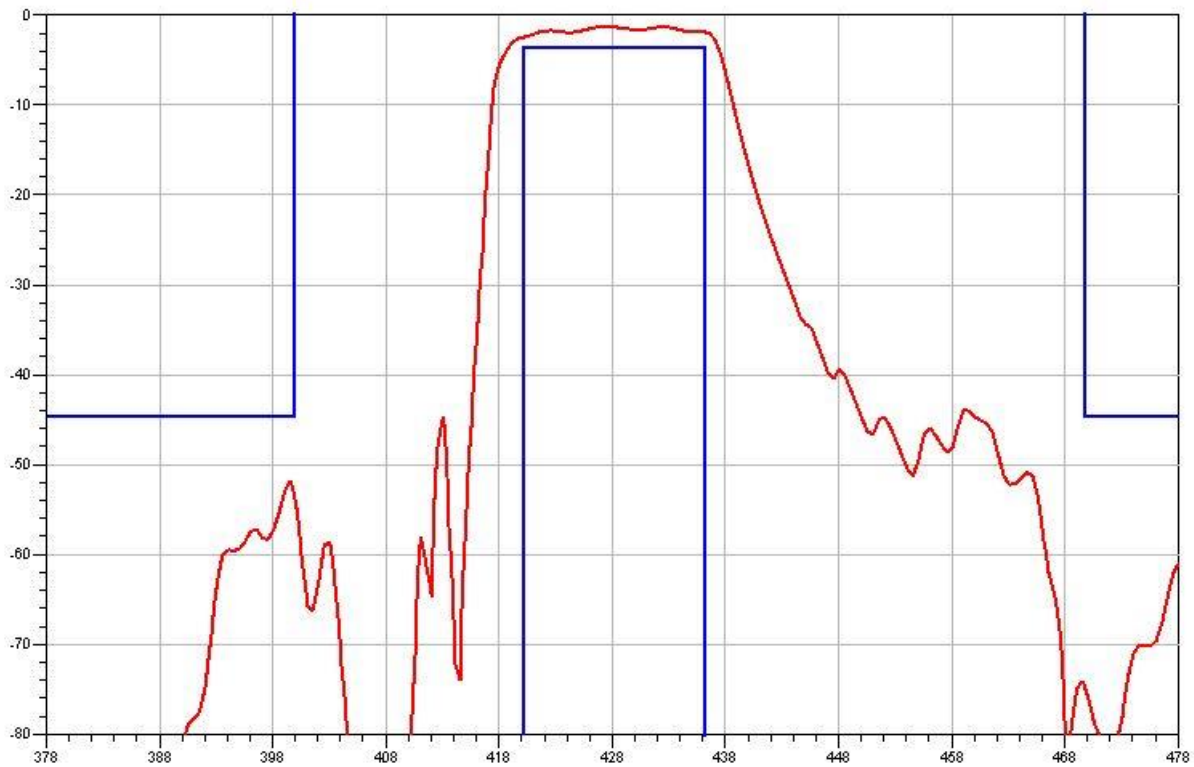

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

● **APPROVAL**

DRAWN BY	F. Parra, 30 March 2015
APPROVED BY	F. Parra, 30 March 2015
REVISION	A, Initial Release

this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.