


Items	Specification	Unit
Center frequency (Fo)	433.920	MHz
Bandwidth	1000	kHz
Insertion loss	4.0	dB
Attenuation	Fo ± 21.4 MHz	36
	Fo ± 10.7 MHz	30
	Fo ± 1.0 MHz	15
DC Voltage, maximum	12V	
DC Insulation Resistance, minimum	1.0 MΩ	
RF Power Dissipation, maximum	10 dBm	
In/Out Impedance	50Ω	
Operation Temperature	-10°C to +60°C	
Storage Temperature	-40°C to +85°C	

Dimension

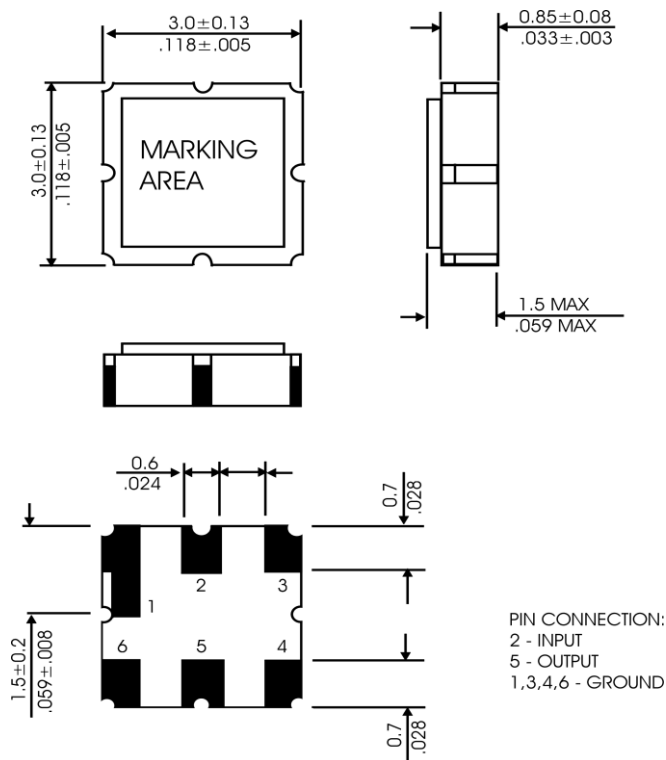

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless.

RALTRON ELECTRONICS ■ 10400 N.W. 33rd Street ■ Miami, Florida 33172 ■ U.S.A.
Tel: 305-593-6033 ■ Fax: 305-594-3973 ■ e-mail: sales@raltron.com ■ internet: http://www.raltron.com



A **RAMI TECHNOLOGY** Company

RF SAW FILTER
RSF-433.920-1000-3030-TR

page 2 of 2

against all damages.