


Items		Specification	Unit
Center frequency (Fo)		433.920	MHz
Bandwidth		360	KHz
Pass band Ripple (p-p)		2.0	dB max
Relative Attenuation	10 MHz ~ 414.0 MHz	45	dB min
	414.0 MHz ~ 428.0 MHz	40	dB min
	428.0 MHz ~ 432.92 MHz	25	dB min
	434.92 MHz ~ 442.0 MHz	30	dB max
	442.0 MHz ~ 550.0 MHz	35	dB min
	550.0 MHz ~ 1000 MHz	45	dB min
DC Voltage, maximum		10V	
RF Power Dissipation, maximum		10 dBm	
In/Out Impedance		50Ω	
Operation Temperature		-40°C to +85°C	
Storage Temperature		-45°C to +85°C	

Dimension

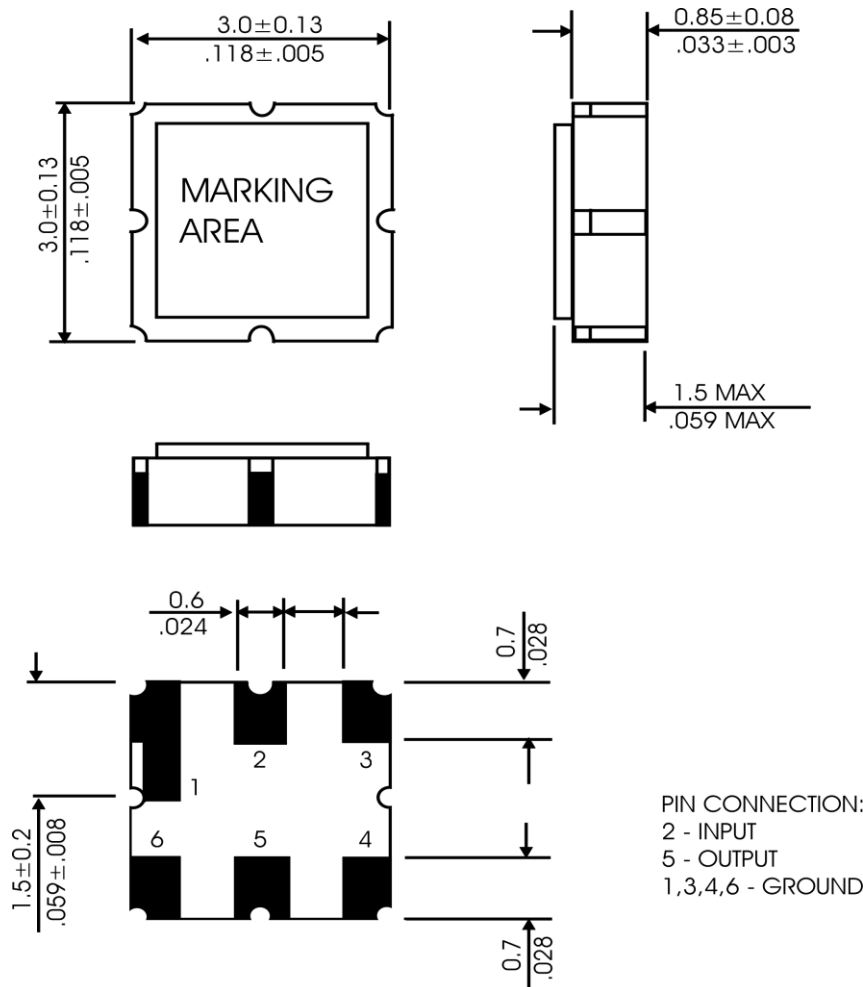

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Frequency Characteristics

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.