


Items		Specification	Unit
Nominal Frequency (fo)		806.000	MHz
Insertion Loss, 803 ~ 809 MHz		4.0	dB Max
Amplitude Ripple, 803~809 MHz		1.3	dB Max
VSWR		803MHz ~ 809 MHz	2.2 Max
1.3dB Bandwidth		-	12 MHz Max
Attenuation (reference level from 0dB)	400 MHz ~ 770 MHz	45	dB min
	770 MHz ~ 782 MHz	40	dB min
	825 MHz ~ 835 MHz	30	dB min
	835 MHz ~ 950 MHz	45	dB min
Input Power, maximum		10 dBm	
Source Impedance		50Ω	
Load Impedance		50Ω	
Operating Temperature		-20°C to +80°C	
Storage Temperature		-40°C to +85°C	

### Dimension

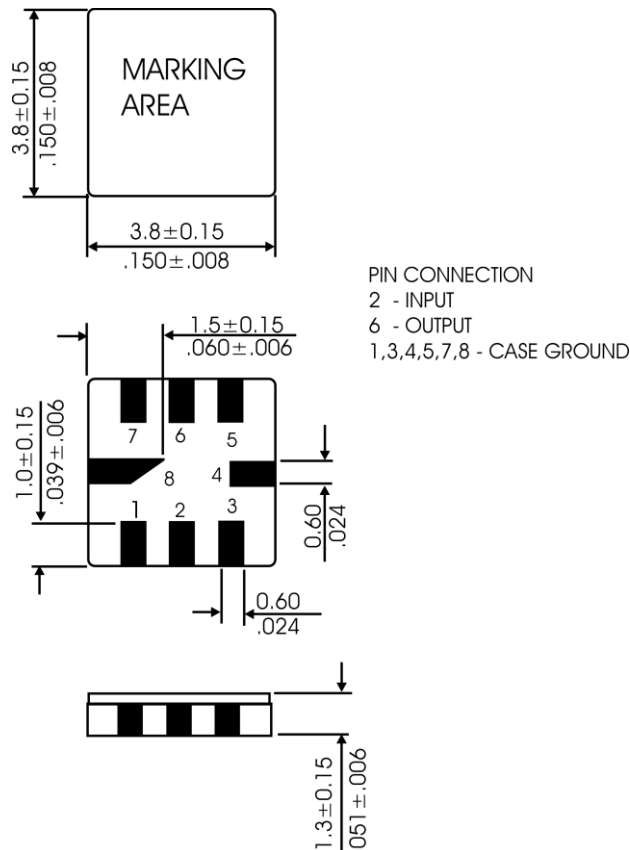


### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
TERMINATION FINISH	Au
REACH – SVHC	Compliant
RoHS 2	6/6
PACKAGING	TAPE & REEL



### TAPE AND REEL

- CARRIER TAPE DIMENSIONS**

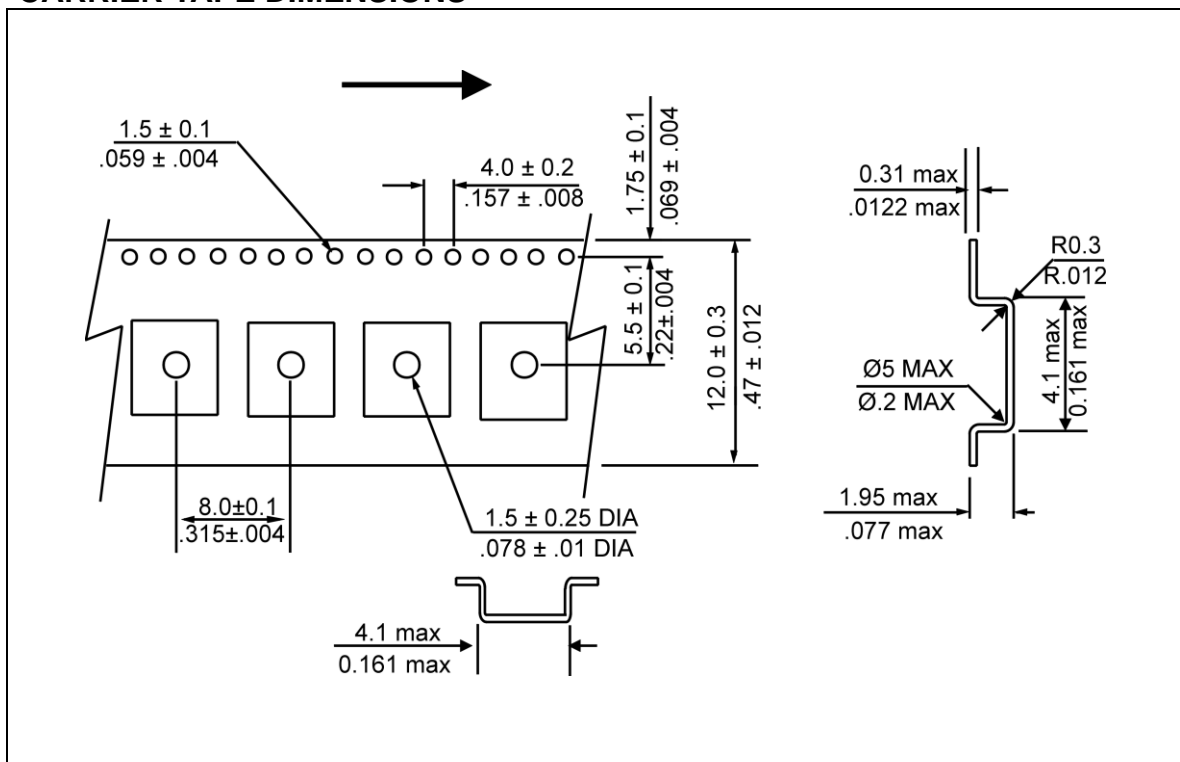

- PACKAGING**

178 mm REEL DIAMETER  
12 mm TAPE WIDTH, 8 mm PITCH  
QUANTITY: 1000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

### MARKING

R806  
•xyw

x – Internal Production ID code  
y – Year code  
w – Week code

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9

ALPHA WEEK CODE TABLE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

### APPROVAL

DRAWN BY	KJackson, July 16, 2015
APPROVED BY	KJackson, July 16, 2015
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.